

DS-TRD902-1/A
UHF Card Issuer

- Comply with EPC C1 GEN2/ISO18000-6C protocol standard
- Good anti-collision mechanism, can read multiple electronic tags at the same time
- Power supply and working status indication


▪ Specification

Model		DS-TRD902-1/A
Interface	USB	1*USB
UHF	Working Frequency	Default 920.5MHz~924.5MHz
	RF Protocol	EPC C1 GEN2/ISO18000-6C
	Transmitting Power	10dBm
	Antenna Type	Circularly polarized antenna (3dBi)
	Reading Distance	≤30cm@Impinj H47, depending on the type of tag as well as the transmit power
	FSA Function	None
	Indicator	LED power indicator, LED status indicator and buzzer
General	Power Supply	5VDC, USB power supply, maximum current 500mA
	Working Environment	-10°C~55°C
	Dimensions	120 × 78 × 29 mm (4.72 × 3.07 × 1.14 inch)
	Protection	IP53
	Weight	0.12 kg (0.0265 lb.)

▪ Available Model

DS-TRD902-1/A

▪ Dimension

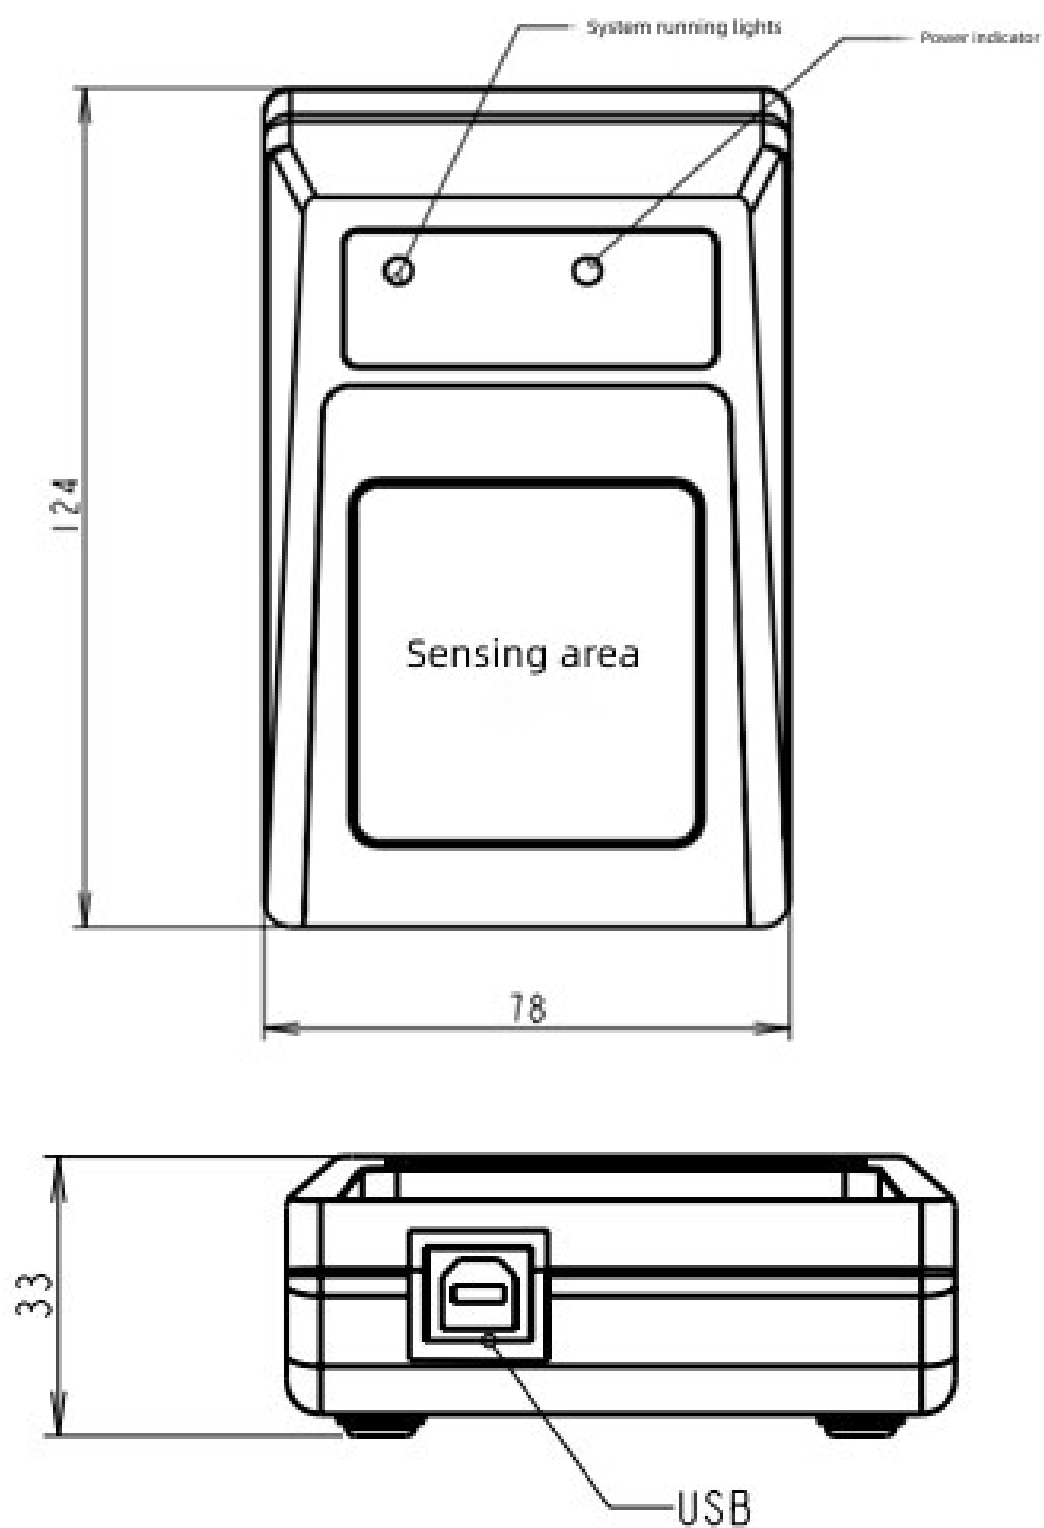

See Far, Go Further



www.hikvision.com
support@hikvision.com

