

DS-9600
256-ch




- Up to 256-ch IP camera inputs
- Up to 48-ch@1080p decoding capacity
- Up to 1.25Gbps incoming bandwidth and 1.25Gbps outgoing bandwidth
- Supports special cameras, including people counting camera, ANPR (automatic number plate recognition) camera, and fisheye camera
- Advanced streaming technology enables smooth live view in poor network conditions
- Supports RAID 0, 1, 5, 6, 10 and N+1 hot spare for even more reliable data storage, effectively avoids data loss risks
- Up to 8-ch IP speakers can be connected

■ Specification

Video and Audio	
IP Video Input	256-ch
Incoming Bandwidth	1280 Mbps
Outgoing Bandwidth	1280 Mbps
Incoming Bandwidth (RAID Mode)	1280 Mbps
Outgoing Bandwidth (RAID mode)	1280 Mbps
HDMI 1 Output	4K (4096 × 2160)/30 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
HDMI 2 Output	4K (3840 × 2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
VGA Output	1920 × 1080/60 Hz
DP 1	8K (7680 × 4320)/30Hz, 4K (4096×2160)/30 Hz, 4K (3840×2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz
DP 2	8K (7680 × 4320)/30Hz, 4K (4096×2160)/30 Hz, 4K (3840×2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz
V-DP 1	8K (7680 × 4320)/30Hz, 4K (4096×2160)/30 Hz, 4K (3840×2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz
V-DP 2	8K (7680 × 4320)/30Hz, 4K (4096×2160)/30 Hz, 4K (3840×2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz
Video Output Mode	Provide 4 groups of video outputs. The video outputs in the same group provide simultaneous output, and the video outputs between each group provide independent output. Group 1: HDMI 1/VGA/LCD Group 2: HDMI 2 Group 3: DP 1/V-DP 1 Group 4: DP 2/V-DP 2 Note: After enabling DP 1/DP 2, V-DP 1/V-DP 2 would be unavailable.
Audio Output	1-ch, 3.5mm
Two-Way Audio	1-ch, 3.5mm
Decoding	
Decoding Format	H.265+/H.265/H.264+/H.264
Recording Resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	16-ch
Decoding Capability	3-ch@32 MP (30 fps)/3-ch@24 MP (30fps)/6-ch@16 MP (30fps)/12-ch@8 MP (30fps)/24-ch@4 MP (30fps)/48-ch@2 MP (30fps) *: The length or width of camera resolution (each track) cannot exceed 4096 pixels.
Audio Compression	G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM
Network	
Network Interface	4, RJ-45 10/100/1000/2500 Mbps self-adaptive Ethernet interface
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Remote Connection	256
RAID	
RAID Type	RAID0, RAID1, RAID5, RAID6, RAID10
Auxiliary Interface	
eSATA	1 eSATA interface
SATA	16 SATA interfaces supporting hot-plug
Capacity	Up to 20 TB for each HDD
Serial Interface	1 RS-485 (full-duplex), 1 RS-232

Alarm In/Out	16/8
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 4 × USB 3.0
General	
Power Supply	100 to 240 VAC, 50 to 60 Hz, redundant power supply
Consumption	≤ 75 W (without HDD)
Working Temperature	0 °C to + 50 °C (32 °F to 122 °F)
Working Humidity	10% to 90%
Chassis	3U chassis
Dimension (W × D × H)	445 × 489 × 133 mm (17.50" × 19.26" × 5.22")
Weight	≤20 kg (without HDD, 44.1 lb.)

Physical Interface

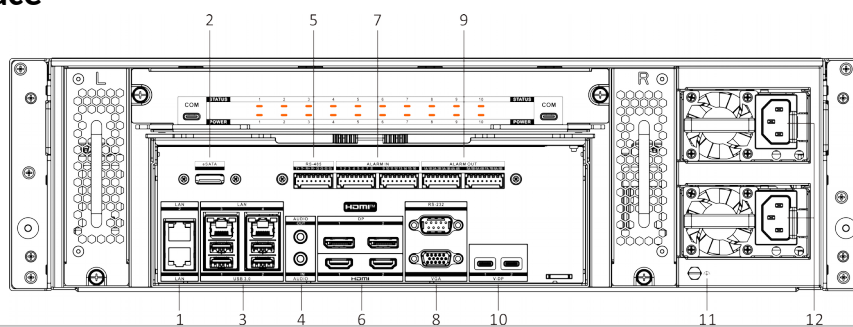

No.

1

2

D	D
e	e
s	s
c	c
r	r
i	i
p	p
t	t
i	i
o	o
n	n
L	A
A	N
i	A
n	l
t	a
e	r
r	m
f	i
a	n
c	
e	
s	
e	8
S	V
A	G
T	A
A	i

			i n t e r f a c e		n t e r f a c e a n d R S - 2 3 2 s e r i a l i n t e r f a c e
			U S B 3 · 0 a n d L	9	A l a r m o u t
3					

	A N			
	i n t e r f a c e s			
4	A u d i o i n a n d o u t		10	V - D P i n t e r f a c e s
5	R S - 4 8 5 s e r i a l i n t e r f		11	G N D

6

a		
c		
e		
H		
D		
M		
I		
a		
n		
d		
D		
P	1	P
i	2	o
n		w
t		e
e		r
r		s
f		u
a		p
c		p
e		l
s		y

■ Available Model

DS-96256NI-H16R(STD)

DS-96256NI-H16R(NEU)

DS-96256NI-H16R(STD)/TECHNOLOGY

■ Dimension

