

DS-9600  
256-ch




- Up to 256-ch IP camera inputs
- Up to 48-ch@1080p decoding capacity
- Up to 1.25Gbps incoming bandwidth and 1.25Gbps outgoing bandwidth
- Supports special cameras, including people counting camera, ANPR (automatic number plate recognition) camera, and fisheye camera
- Advanced streaming technology enables smooth live view in poor network conditions
- Supports RAID 0, 1, 5, 6, 10 and N+1 hot spare for even more reliable data storage, effectively avoids data loss risks

## ■ Specification

<b>Video and Audio</b>	
IP Video Input	256-ch
Incoming Bandwidth	1280 Mbps
Outgoing Bandwidth	1280 Mbps
Incoming Bandwidth (RAID Mode)	1280Mbps
Outgoing Bandwidth (RAID mode)	1280 Mbps
HDMI 1 Output	4K (4096 × 2160)/30 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
HDMI 2 Output	4K (3840 × 2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
VGA Output	1920 × 1080/60 Hz
DP 1	8K (7680 × 4320)/30Hz, 4K (4096×2160)/30 Hz, 4K (3840×2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz
DP 2	8K (7680 × 4320)/30Hz, 4K (4096×2160)/30 Hz, 4K (3840×2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60Hz
Video Output Mode	Provide 4 groups of video outputs. The video outputs in the same group provide simultaneous output, and the video outputs between each group provide independent output. Group 1: HDMI 1/VGA/LCD Group 2: HDMI 2 Group 3: DP 1 Group 4: DP 2
Audio Output	1-ch, 3.5mm
Two-Way Audio	1-ch, 3.5mm
<b>Decoding</b>	
Decoding Format	H.265+/H.265/H.264+/H.264
Recording Resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	16-ch
Decoding Capability	3-ch@32 MP (30 fps)/3-ch@24 MP (30fps)/6-ch@16 MP (30fps)/12-ch@8 MP (30fps)/24-ch@4 MP (30fps)/48-ch@2 MP (30fps) *: The length or width of camera resolution (each track) cannot exceed 4096 pixels.
Audio Compression	G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM
<b>Network</b>	
Network Interface	4, RJ-45 10/100/1000/2500 Mbps self-adaptive Ethernet interface
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Remote Connection	256
<b>RAID</b>	
RAID Type	RAID0, RAID1, RAID5, RAID6, RAID10
<b>Auxiliary Interface</b>	
SATA	30 SATA interfaces supporting hot-plug
Capacity	Up to 20 TB for each HDD
Serial Interface	1 RS-485 (full-duplex), 1 RS-232
Alarm In/Out	16/4
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 4 × USB 3.0
<b>General</b>	
Power Supply	100 to 240 VAC, 50 to 60 Hz, redundant power supply
Consumption	≤ 75 W (without HDD)
Working Temperature	0 °C to + 50 °C (32 °F to 122 °F)

Working Humidity	10% to 90%
Chassis	4U chassis
Dimension (W × D × H)	447 × 489 × 173 mm (17.61" × 19.26" × 6.82")
Weight	≤26 kg (without HDD, 57.3 lb.)

## Physical Interface

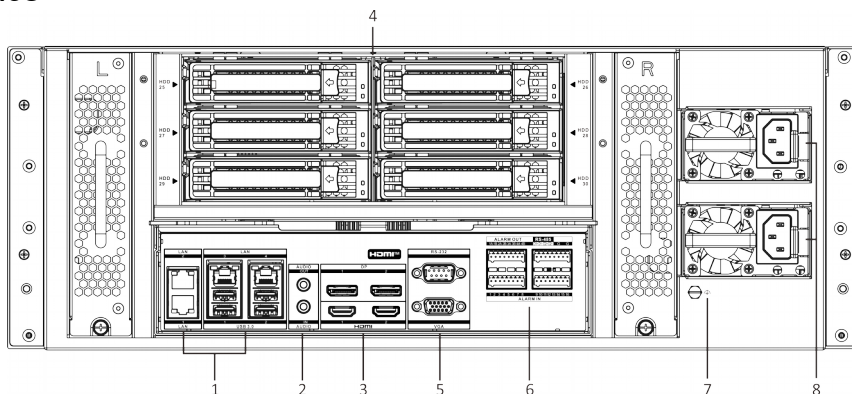

No.		D e s c r i p t i o n	N o.	D e s c r i p t i o n
1		L A N	5	V G A  a n d  U S B  i n t e r f a c e s

2	A u d i o i n a n d o u t	6	A l a r m  i n , a l a r m  o u t , a n d  R S - 4 8 5
3	H D M I a n d  D P  i n t e r f a c	7	G N D


4	e s	8	P o w e r s u p p l y

### Available Model

DS-96256NI-H30R(STD)

DS-96256NI-H30R(NEU)

### Dimension

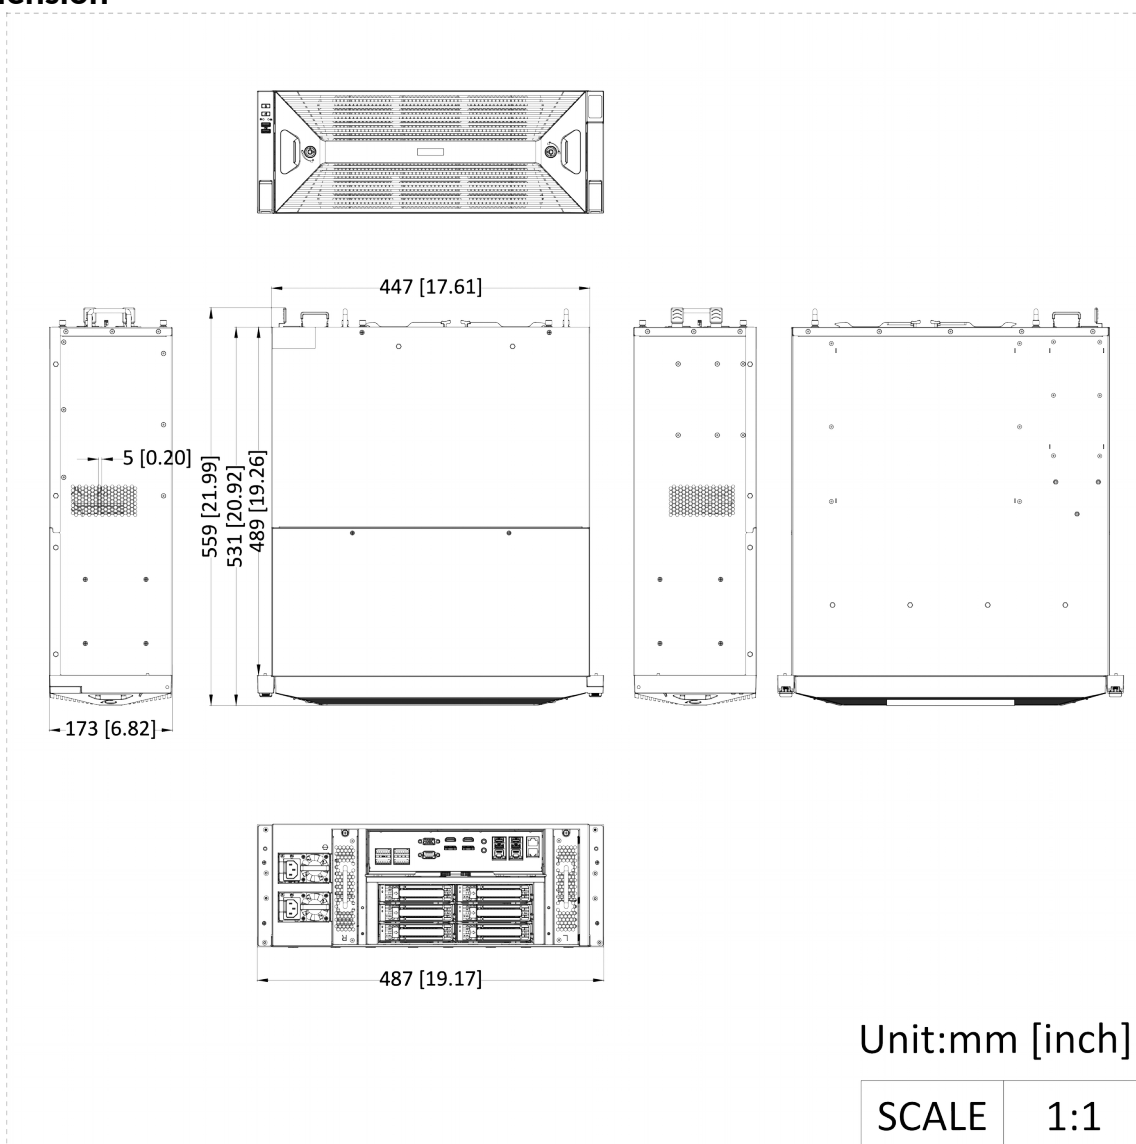



© F  
ex

