

DS-KV6133-WME1 IP Villa door station



- 2 MP camera with IR supplement
- One button calling design for easier calls
- Built-in card reader module
- Standard PoE power supply
- IP65 protection level with aluminum alloy casing
- Call directly to Hik-Connect APP without indoor station

▪ Specification

System parameters	
Operation system	Linux
ROM	32 MB
RAM	256 MB
Processor	Embedded high performance processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	1
Resolution	Main stream: 1920 × 1080p , 1280 × 720p Sub stream: 1280 × 720p , 640 × 480p
FOV	Horizontal:129°,Vertical: 75°
Wide dynamic range (WDR)	Support 120 dB
Supplement light	IR light, up to 2.5 m
Video compression standard	H.264; H.265; MJPEG
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711 U、 G.711 A、 Opus、 AAC-LD、 AAC-LC、 G.726、 G.722.1
Audio output	1 built-in loudspeaker
Audio compression bitrate	16/32/64 Kps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
User capacity	2000
Face capacity	/
Card capacity	10000
Network parameters	
Network protocol	TCP/IP, RSTP, IPV6, ONVIF
Wi-Fi	2.4GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	4
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
TAMPER	1
Exit button	1
RS-485	1
USB	/
Wiegand	/
TF card	1(Reserved)


Alarm output	/
Lock control	1 relay, Max. 30 VDC 2 A
Door contact input	1
Audio output	1 external loudspeaker(Reserved)
General	
Button	1 physical button
Installation	Surface mounting, Flush mounting
Indicator	2
Weight	Net weight: 0.190 kg Gross weight: 0.414 kg
Protective level	IP65
Working temperature	-40 °C to 53 °C (-40 °F to 127.4 °F)
Working humidity	10% to 95% (no-condensing)
Dimension (W × H × D)	181.6 mm × 103.6 mm × 29.5 mm (7.1" × 4.0" × 1.1")
Battery	/
Application environment	Outdoor
Power consumption	< 10 W
Language	English, Arabic, European French, Russian, European Spanish, Latin American Spanish, Italian, German, Polish, Turkish, Portuguese, Brazilian Portuguese, Uzbek, Kazakh, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovenian, Slovak, Hebrew, Swedish, Finnish, Mongolian, Vietnamese, Traditional Chinese (Taiwan), Latin American Spanish
Power supply	12 VDC, 1.5 A, IEEE802.3af, Standard PoE

▪ Available Model

DS-KV6133-WME1

DS-KV6133-WME1/Australia/Surface

▪ Dimension

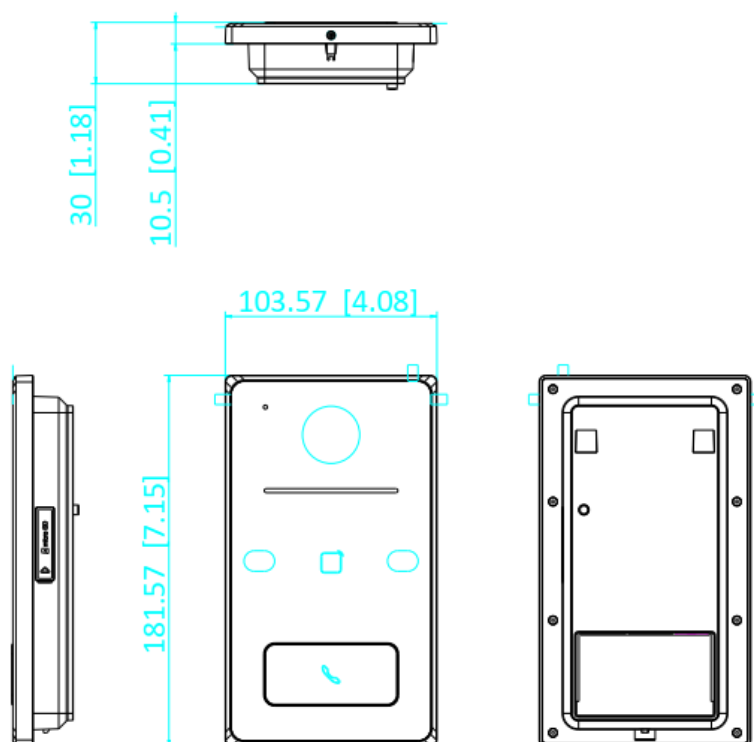

Unit:mm [inch]

SCALE 1:1

- Accessory
- Optional

DS-KABV6133-G/Su	DS-KABV6133-RS
rface	

See Far, Go Further



www.hikvision.com
support@hikvision.com

