

## **DS-K1T808MFX** **Fro Fingerprint Terminal**



Fingerprint access control terminal supports multiple authentication modes: card/fingerprint/PIN authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- 2.4-inch LCD screen
- Multiple authentication methods, including fingerprint, card (M1 card), and PIN, etc.
- Max. 3000 cards, 3000 fingerprints and 100,000 events
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via the PC web client and mobile web client
- Supports wiring with secure door control unit or card reader via RS-485
- Supports access control and local time and attendance function


## ▪ Specification

| Display                    |                                                                                                                        |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Screen size                | 2.4 inch                                                                                                               |
| Type                       | LCD                                                                                                                    |
| Network                    |                                                                                                                        |
| Wired network              | Support                                                                                                                |
| Interface                  |                                                                                                                        |
| Network interface          | 1 RJ-45, 10/100 M self-adaptive                                                                                        |
| Lock control               | 1                                                                                                                      |
| Exit button                | 1                                                                                                                      |
| Door contact input         | 1                                                                                                                      |
| TAMPER                     | 1                                                                                                                      |
| RS-485                     | 1 RS-485 (Half duplex, HIKVISION)                                                                                      |
| Wiegand                    | 1 Wiegand(Hik 26bit,Hik 34bit)                                                                                         |
| USB                        | 1                                                                                                                      |
| Authentication             |                                                                                                                        |
| Card type                  | M1 card                                                                                                                |
| Fingerprint module         | Optical fingerprint module                                                                                             |
| Fingerprint comparing mode | 1:1 and 1:N                                                                                                            |
| General                    |                                                                                                                        |
| Power supply               | 12 VDC                                                                                                                 |
| Power consumption          | ≤ 6 W                                                                                                                  |
| Working temperature        | -10 °C to 55 °C (14 °F to 131 °F)                                                                                      |
| Working humidity           | 0% to 90% (No condensing)                                                                                              |
| Language                   | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean, Japanese |
| Keypad                     | Support                                                                                                                |

## ▪ Available Model

DS-K1T808MFX

## ▪ Dimension

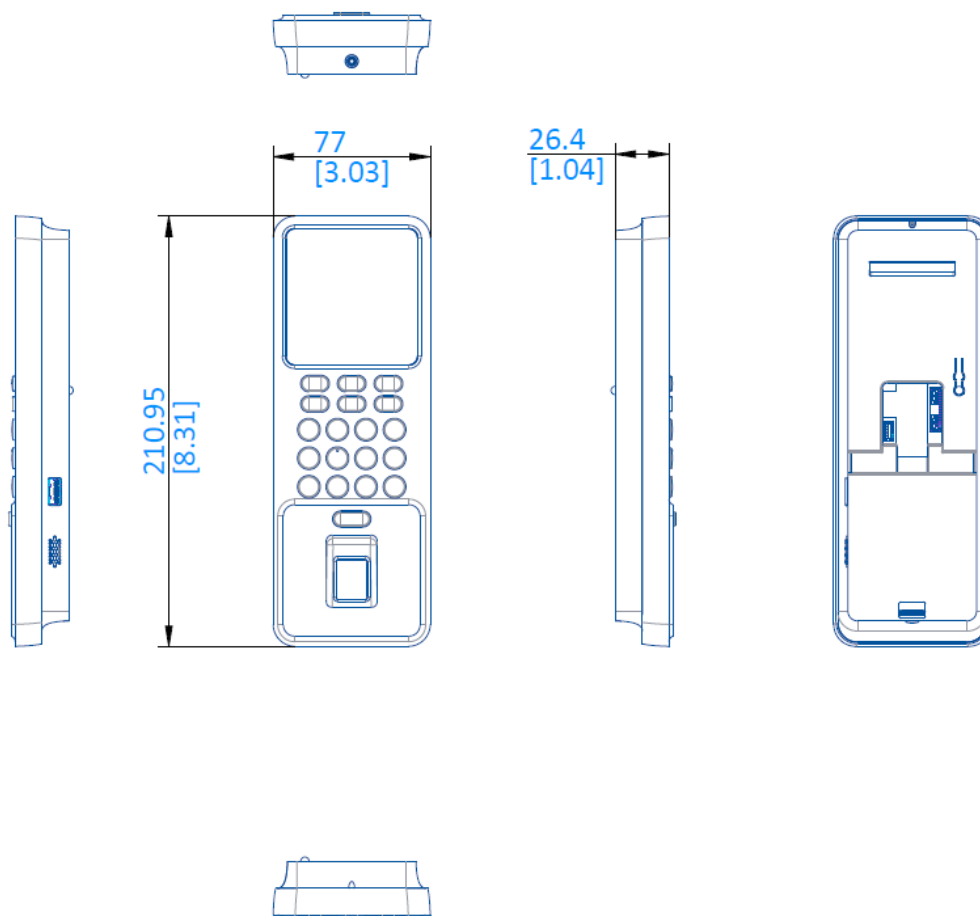

Unit: mm [inch]

|       |     |
|-------|-----|
| SCALE | 1:1 |
|-------|-----|

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq