

DS-D5022F2-6V2
21.5" FHD 100Hz VA Monitor



- VA technology, 178° ultra-wide view screen.
- 8 bit LVDS FHD (1920 × 1080) display.
- 100 Hz refresh rate, more fluid and life-like video.
- Ultra-thin device body with ultra-thin border for 3 sides.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.


▪ Specification

Model		DS-D5022F2-6V2
Display	Screen Size	21.5 inch
	Active Display Area	478.656 (H) mm × 260.28 (V) mm
	Resolution	1920 × 1080
	Backlight	E-LED
	Pixel Pitch	0.241 (H) mm × 0.241 (V) mm
	Brightness	250 cd/m ²
	Viewing Angle	178° (H) / 178° (V)
	Color Depth	8 bit, 16.7 M
	Contrast Ratio	4000 : 1
	Response Time	8 ms
	Refresh Rate	100 Hz
	Haze	Haze 25%, 3H
	Reliability	7 × 16 H
	Color Gamut	72%NTSC
Interface	Video & Audio Input	HDMI 1.4 × 1, VGA × 1, Audio in × 1
	Video & Audio Output	Speaker × 2 (4Ω 2W)
	Data Transmission Interface	None
	Control Interface	None
Power	Power Supply	DC 12V, 2.0A
	Power Consumption	≤ 24 W
	Standby Consumption	≤ 0.5 W
Working Environment	Working Temperature	0°C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 90% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% to 90% RH (Non-Condensing)
General	Casing Material	Plastic
	VESA	75 mm × 75 mm (4 - M4 × 6 mm)
	Bezel Width	2.38 mm (top/left/right), 21.55 mm (bottom)
	Product	With base: 493.26 (W) mm × 369.12 (H) mm × 162.75 (D) mm

	Dimensions (W × H × D)	(19.42 (W) × 14.53 (H) × 6.41 (D)) inch Without base: 493.26(W) mm × 290.14 (H) mm × 42.68 (D) mm (19.42 (W) × 11.42 (H) × 1.68 (D)) inch
	Package Dimensions (W × H × D)	598 (W) mm × 391 (H) mm × 106 (D) mm (23.54(W) × 15.39 (H) × 4.17 (D)) inch
	Net Weight	2.0 ± 0.5 kg (4.4 ± 1.1 lb)
	Gross Weight	3.2 ± 0.5 kg(7.1 ± 1.1 lb)
	Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1
	Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information

▪ Physical Interface

Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
Audio in	3.5mm Audio input interface	DC	DC 12V 2.0A input interface




▪ Available Model

DS-D5022F2-6V2(EU)

DS-D5022F2-6V2

DS-D5022F2-6V2(US)

▪ Dimension

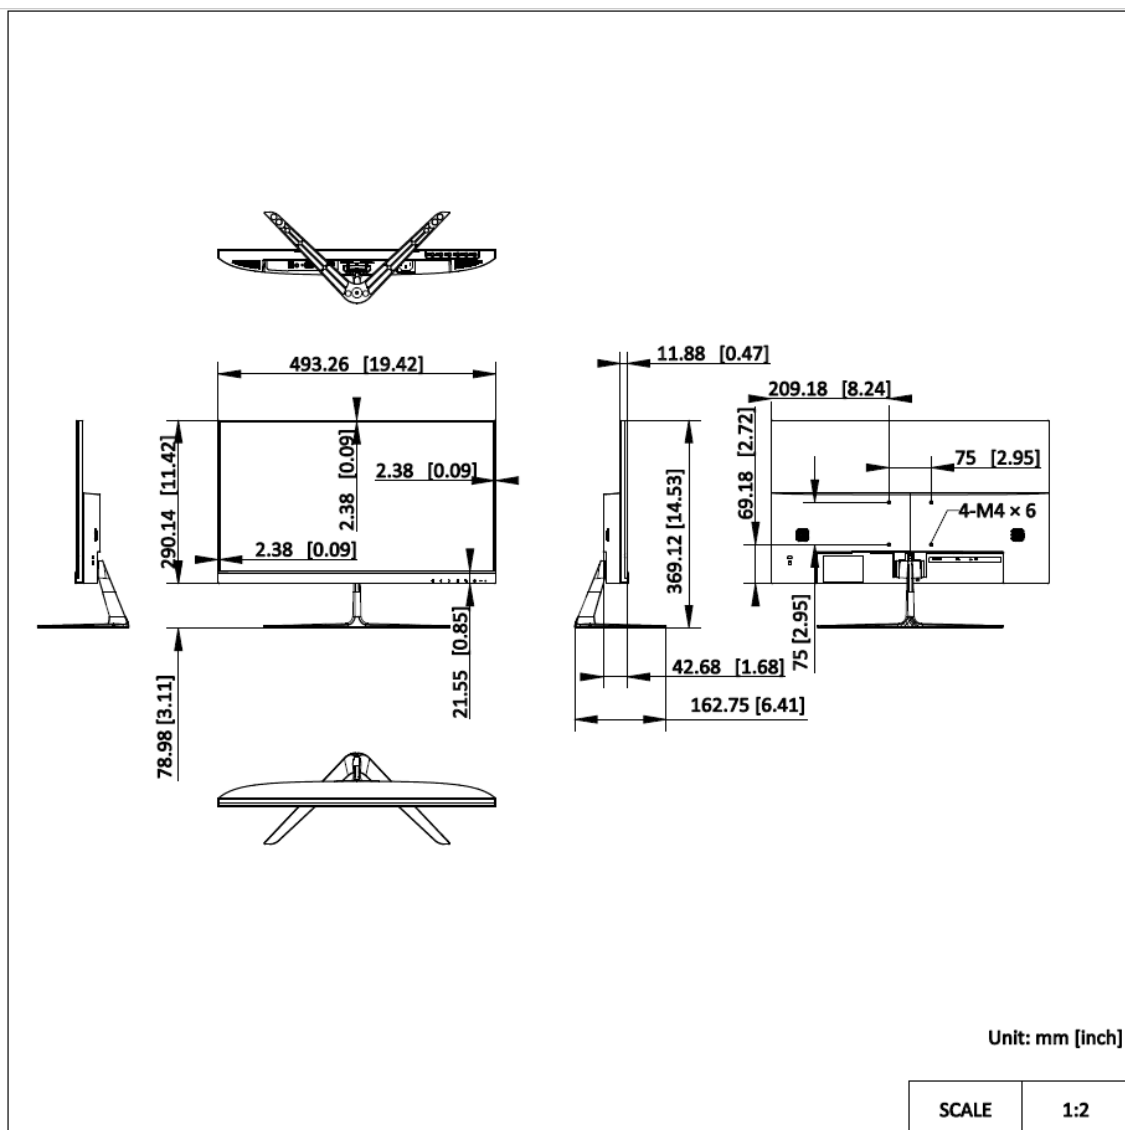

- Accessory
- Optional

DS-DM1940W
Wall-mounted
Bracket



See Far, Go Further



www.hikvision.com
support@hikvision.com

