

**DS-TVL221-1-6D**  
**Entrance & Exit Signal Light**



- Entrance & Exit Signal Light with Red and Green
- Ensure that vehicles move in an orderly manner as directed to avoid traffic congestion and confusion

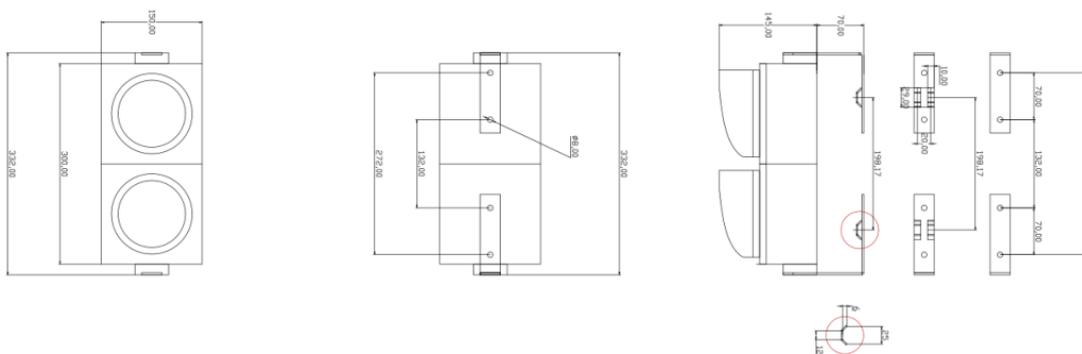
## ▪ Specification

Display Screen	
Color Display	Red, Green
Best Viewing Distance	1-100 m
Number of Module	2
Control Mode	IO
Luminance	≥4000 cd/m <sup>2</sup>
Number of Lamp Beads	Red: 40 , Green: 40
General	
Working Temperature & Humidity	Temperature: -20 °C to 50 °C (-4 °F to 122 °F) Humidity: ≤ 90% (non-condensing)
Working Voltage	100 to 240 VAC
Working Consumption	Max. 7 W
Dimensions	300 mm × 150 mm × 85 mm (11.81 × 5.91 × 3.35 inch)
Weight	1.4 kg (3.09 lb.)
Color	Black
Weight (with Package)	2.3 kg (5.07 lb.)
Package Size	420 × 195 × 205 mm (16.54 × 7.68 × 8.07 inch)
Lifespan	≥50,000 hours
Material	PC

## ▪ Available Model

DS-TVL221-1-6D

## ▪ Dimension



## ▪ Accessory

## ▪ Optional



DS-TMG520-H/Y

DS-TMG520

DS-TMG521

DS-TMG521/B

DS-TMG523/B

				
<b>DS-TMG520/A/B</b>	<b>DS-TMG520#EU</b>	<b>DS-TMG421</b>	<b>DS-TMG423</b>	<b>DS-TMG420/A</b>
				
<b>DS-TMG420/A/B</b>	<b>DS-TMG421/B</b>	<b>DS-TMG423/B</b>	<b>DS-TMG420#EU</b>	<b>DS-TMG420</b>
				
<b>DS-TMG301-D</b>	<b>DS-TMG300-D</b>	<b>DS-TMG300-D/A/B</b>	<b>DS-TMG300-D/A</b>	
				

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

