

THC-T157-PTLTS 3K Two Way Audio Fixed PT Turret





- High quality imaging with 3K, 2960 × 1665 resolution
- Up to 20 m white light and 25 m IR distance for bright night imaging
- Smart-Hybrid Light, optimize your security with flexible lighting options
- High quality audio with audio over coaxial cable, built-in mic, and built-in speaker
- Provide real-time communication via built-in two-way audio



Specification

Specification	
Camera	
Image Sensor	3K CMOS
Max. Resolution	2960 (H) × 1665 (V)
Min. Illumination	0.01 Lux @(F2.0, AGC ON), 0 Lux with White Light
Shutter Time	PAL: 1/12.5 s to 1/50,000 s,NTSC: 1/15 s to 1/50,000 s
Day & Night	ICR
Angle Adjustment	Pan: 0° to 350°, Tilt: 0° to 100°
Signal System	PAL/NTSC
Lens	
Lens Type	2.8 mm, 3.6 mm fixed lens
Focal Length & FOV	2.8 mm, horizontal FOV: 112°, vertical FOV: 62°, diagonal FOV: 131°;
	3.6 mm, horizontal FOV: 92°, vertical FOV: 48°, diagonal FOV: 112°
Lens Mount	M12
Microphone	
Pickup Distance	In a radius of up to 5 m
Amount	1
Speaker	
Rated Power	2 W
Speaker Range	In a radius of up to 5 m
Illuminator	
	IR,
Supplement Light Type	White Light
Supplement Light Range	IR: Up to 25 m, White Light: Up to 20 m
Image	
-	
Image Settings	Anti-banding,
	Brightness,
	Sharpness,
	Smart IR
Frame Rate	TVI: 3K @10 fps/12.5 fps/20 fps/25 fps, 4 MP @25 fps/30 fps, 1080P @25 fps/30 fps
Day/Night Mode	Auto/Color/BW (Black and White)
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	DWDR,
	BLC,
	HLC,
	Global,
	HLS
Noise Reduction	2D DNR
White Balance	Auto,
	Manual
Audio	
Audio Function	Echo Cancellation, Al Noise Reduction, Automatic Gain Control
Interface	
Video Output	1 HD analog output
	= :-= =::::




General	
Power	12 VDC ± 25%, max.10 W
Material	Plastic
Dimension	Ø123.7 mm × 110.8 mm (4.87" × 4.36")
Weight	Approx. 335 g (0.75 lb.)
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F). Humidity 90% or less (non-condensing)
Communication	HIKVISION-C
Language	English

Available Model

THC-T157-PTLTS(2.8mm)

THC-T157-PTLTS(3.6mm)

Dimension

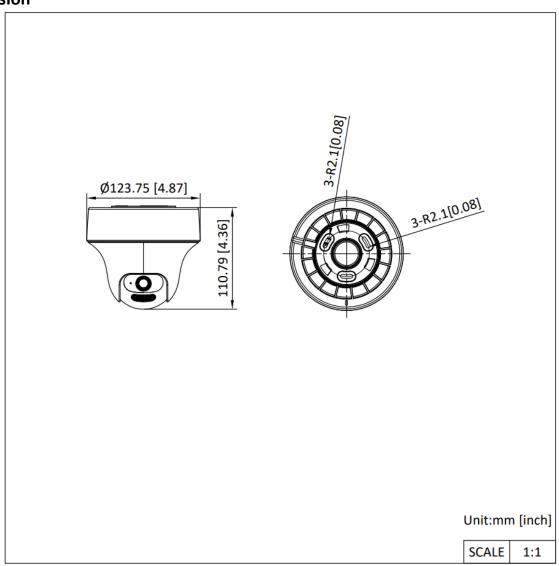







Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.











