

## DS-TPE300-S Entrance & Exit Control Terminal



- Cascade management: One can manage up to 4 lanes, and up to 5 devices can be cascaded
- Strong adaptability: fully closed structure, no fan heat dissipation design, can be used at -10~50° working temperature
- Multi network interface design: 8 network interfaces on the internal network support the access of a large number of network devices and saving switch costs; 2 gigabit network port on the external network support network fault tolerance and dual network IP setting, dual network isolation and other applications
- Remote access: Supports Internet remote access to devices, remote troubleshooting, remote log download, and remote device upgrade
- Local display control: Support VGA/HDMI display, standard mouse and keyboard input control, plug and play, convenient and fast
- Standard SDK interface: The standard SDK protocol supports interconnecting with cloud platforms and has strong external scalability
- Huge pictures storage: 4T 3.5" HDD and 128GB SSD
- Multi other interface: 2 RS-232, 1 RS-485, 2 alarm in, 2 alarm out, 4 USB, 1 audio in, 1 audio out


## ▪ Specification

| Terminal                         |                                                                                                                                                                           |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU                              | J6412, Elkhart Lake Platform Processor, 2 GHz                                                                                                                             |
| Memory                           | 4 GB                                                                                                                                                                      |
| Storage                          | 3.5" 4T Surveillance-Level HDD+ 128GB SSD                                                                                                                                 |
| Interface                        |                                                                                                                                                                           |
| Indicator                        | 4 Indicators (1 x System Indicator, 1 x Hard Disk Status Indicator, 1 x Power Indicator, 1 x Alarm Indicator)                                                             |
| Audio                            | 1 x Audio Input (MIC IN); 1 x Audio Output (AUDIO OUT)                                                                                                                    |
| Video Output                     | 1 x HDMI, 1 x VGA                                                                                                                                                         |
| Alarm Input                      | 2 x Alarm Input (ALARM IN)                                                                                                                                                |
| Alarm Output                     | 2 x Alarm Output (ALARM OUT)                                                                                                                                              |
| RS-232                           | 2 x RS-232 Interface                                                                                                                                                      |
| RS-485                           | 1 x RS-485 Interface                                                                                                                                                      |
| USB                              | 2 x USB 2.0 Interface, 2 x USB 3.0 Interface                                                                                                                              |
| Network Interface                | 8 x 10 Mbps/100 Mbps Self-Adaptive Interface, supporting connecting with switch; 1 x Independent 100 Mbps/1000 Mbps Self-Adaptive Interface, supporting network isolation |
| General                          |                                                                                                                                                                           |
| Material                         | Black Aluminum Material                                                                                                                                                   |
| Power Supply                     | 12V DC /5A                                                                                                                                                                |
| Power Consumption                | Max.: 50 W Average: 25 W                                                                                                                                                  |
| Working Temperature and Humidity | -10 °C to 50 °C (14 °F to 122 °F); 10 % to 95% (No Condensation)                                                                                                          |
| Storage Temperature and Humidity | -20 °C to 70 °C (-4 °F to 158 °F); 10 % to 95% (No Condensation)                                                                                                          |
| Dimensions                       | 245 × 170 × 65 mm (9.65 × 6.69 × 2.56 inch)                                                                                                                               |
| Dimensions (with Package)        | 450 × 240 × 105 mm (17.7 × 9.45 × 4.1 inch)                                                                                                                               |
| Weight (with Package)            | 2.5 kg (5.5 lb.)                                                                                                                                                          |
| Weight                           | 2 kg (4.4 lb.)                                                                                                                                                            |

## ▪ Available Model

DS-TPE300-S(4T+128G SSD)(P)

## ▪ Dimension

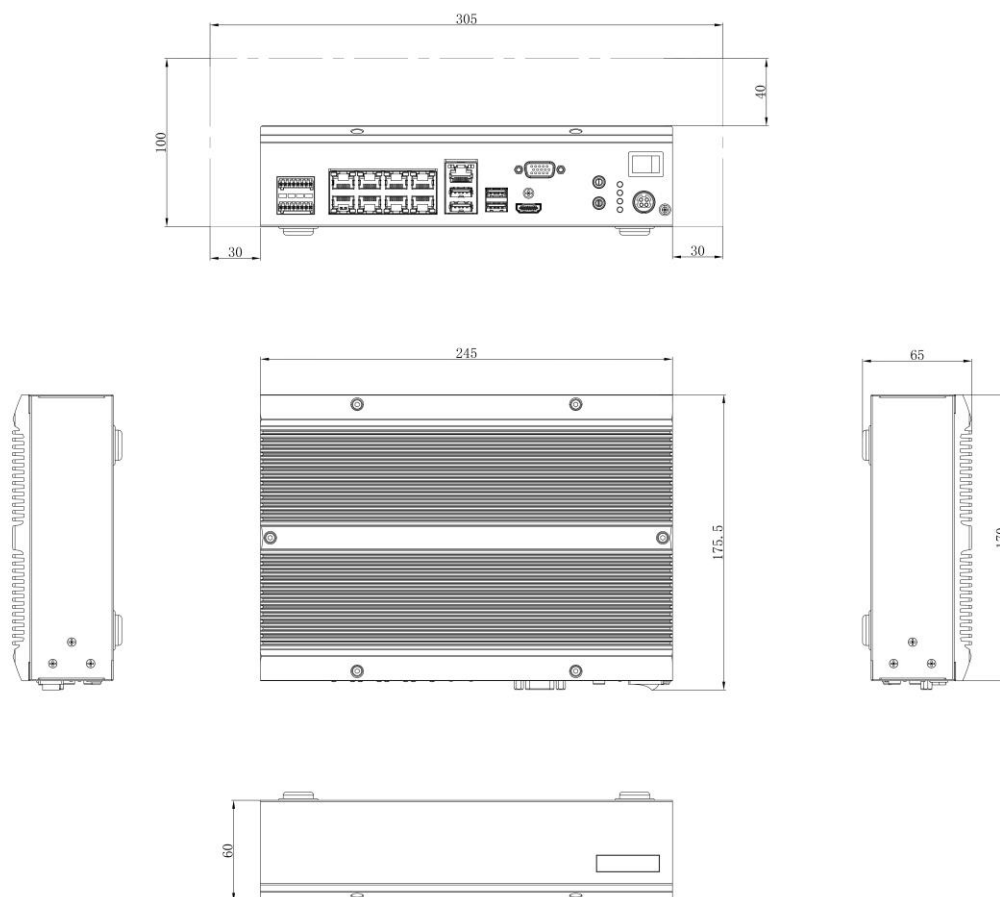

▪ **Accessory**

▪ **Optional**



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

