

## DS-QAE0610G1-V Analog Ceiling Speaker

- 6 inch analog ceiling speaker
- 100V, rated power: 10 W/6 W/3 W/1.5 W; 70V, rated power: 6 W/3 W/1.5 W/0.75 W
- Sensitivity: 98 dB
- Max. SPL: 108 dB
- Frequency Response: 120 Hz to 20 kHz


## ▪ Specification

Speaker	
Impedance	8 $\Omega$
Speaker Unit	Full frequency 6" $\times$ 1
Coverage Angle	125°
Audio	
Rated Power	70V : 6 W/3 W/1.5 W/0.75 W
	100V : 10 W/6 W/3 W/1.5 W
Sensitivity	98 dB
Max. Acoustic Pressure	108 dB
Frequency Response	120 Hz to 20 kHz
Interface	
Audio In	Constant voltage input 100 V/Constant voltage input 70 V
General	
Material	Shell: ABS; Mesh enclosure: iron mesh
Operating Condition	-20 °C to 50 °C (-4 °F to 122 °F )
Dimension	$\varnothing 200 \times 95.3$ mm ( $\varnothing 6.69" \times 3.68"$ )
Package Dimension	230 $\times$ 210 $\times$ 107 mm (9.06" $\times$ 8.27" $\times$ 4.21")
Weight	Approx. 1058 g (2.33 lb.)
With Package Weight	Approx. 1298 g (2.42 lb.)
Packing List	Device $\times$ 1
	Regulatory Compliance and Safety Information $\times$ 1
Mounting Hole Dimension	$\varnothing 171$ mm ( $\varnothing 6.73"$ )

## ▪ Available Model

DS-QAE0610G1-V

## ▪ Dimension

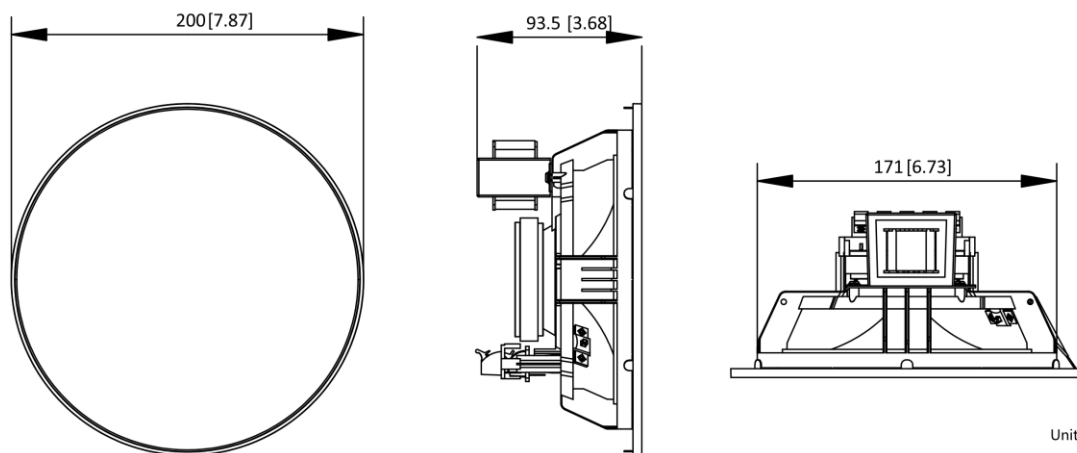

Unit: mm[inch]

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq