

## DS-K1T323EBWX-E1 Value Series Face Access Terminal



- 2.4-inch display screen, 2 Mega pixel wide-angle lens
- 1,000 face capacity, and 3000 card capacity
- Face recognition duration < 0.2 s/User
- Supports face and card authentication
- Two-way audio with client software, indoor station, and main station
- Supports AP mode. Supports mobile Web and PC Web for configuration
- Powers supply by standard PoE and at the same time powers supply for door lock (12 VDC/1 A)
- Supports EM card
- Supports WDR

## ▪ Specification


System	
Operating system	Linux
Display	
Screen size	2.4-inch
Resolution	240 × 320
Type	TFT
Operation method	Non touchable
Video	
Resolution	2MP (video stream:540P)
Lens	× 1
Video standard	PAL (Default) and NTSC
Network	
Bluetooth	Support
Wired network	10/100 Mbps self adaptive
Wi-Fi	Support
Interface	
PoE	IEEE802.3at, standard PoE
Network interface	1
Wiegand	1, supports Wiegand input, single direction
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
Capacity	
User capacity	1000
Card capacity	3000
Face capacity	1000
Event capacity	150000
Authentication	
Card type	EM card
Card reading frequency	125 KHz
Face recognition duration	< 0.33 s
Face recognition accuracy rate	> 99%
Face recognition distance	0.3 to 1.5 m
General	
Button	Physical call button
Power supply	12 VDC, 1 A, standard PoE
Working temperature	-30 °C to 65 °C (-22 °F to 149 °F)
Working humidity	0 to 90% (No condensing)
Dimensions	135mm × 52 mm × 26 mm (5.32" × 2.05" × 1.02")
Installation	Wall mounting
Protective level	IP65
Weight	Gross weight: 0.59 kg (1.3 lbs) Net weight: 0.19 kg (0.42lbs)

Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Turkish, French, Traditional Chinese
<b>Function</b>	
QR code recognition	Not support
Face anti-spoofing	Support
Two-way audio	Support
Audio prompt	Support
Time synchronization	Support

## ▪ Available Model

DS-K1T323EBWX-E1

## ▪ Dimension

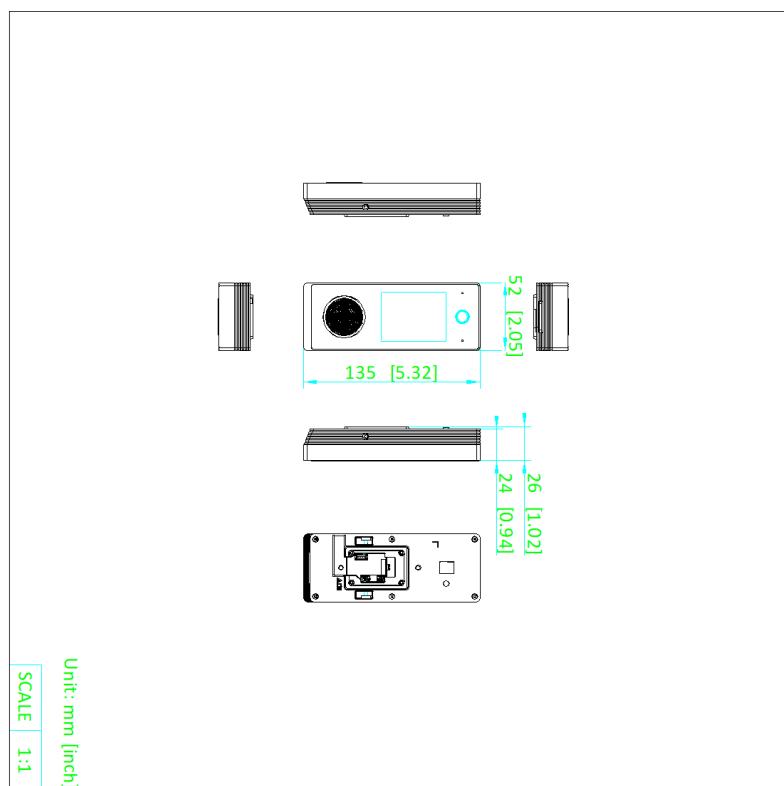

## ▪ Accessory

### ▪ Optional



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HIKVISION®**