

## DS-K1T510MBWX-QRE1 Access Control Terminal



- Manage access control and intercom functions in one device
- Supports multiple authentication methods (M1 card, PIN Code, QR code, etc.)
- Remote control via the Hik-Connect mobile app
- Two-way audio with client software, indoor station, and main station.
- Supports AP mode. Supports mobile Web and PC Web for configuration
- Supports powered by 12 VDC or PoE and supports powering for device and door lock
- Supports WDR

## ▪ Specification


System	
Operating system	Linux
Video	
Lens	× 1
Video standard	PAL (Default) and NTSC
Network	
Bluetooth	Support
Wired network	10/100 Mbps self adaptive
Wi-Fi	Support
Interface	
PoE	IEEE802.3at, standard PoE
Network interface	1
Wiegand	1, supports Wiegand input, single direction
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
Capacity	
User capacity	1000
Card capacity	3000
Face capacity	1000
Event capacity	150000
Authentication	
Card type	M1 card,M1 card content,CPU card No.
Card reading frequency	13.56 MHz
Face recognition duration	< 0.33 s
Face recognition accuracy rate	> 99%
Face recognition distance	0.3 to 1.5 m
General	
Button	No physical call button
Power supply	12 VDC, 1 A, standard PoE
Working temperature	-30 °C to 65 °C (-22 °F to 149 °F)
Working humidity	0 % to 90 % (no condensing)
Dimensions	157 mm × 52 mm × 26 mm (6.18" × 2.05" × 1.02")
Installation	Wall mounting
Protective level	IP65
Language	Arabic, English, French, Indonesian, Italian, Portuguese (Europe), Russian, Spanish (Europe), Thai, Ukrainian, Vietnamese, German, Polish, Hungarian, Czech, Romanian, Bulgarian, Croatian, Serbian, Greek, Slovak, Portuguese (standard), Dutch, Turkish
Weight	Net weight: 0.2 kg (0.44 lb) Rough weight: 0.6 kg (1.32 lb)
Function	
QR code recognition	Support scan QR code via QR code module
Face anti-spoofing	Support

Two-way audio	Support
Audio prompt	Support

## ▪ Available Model

DS-K1T510MBWX-QRE1

## ▪ Dimension

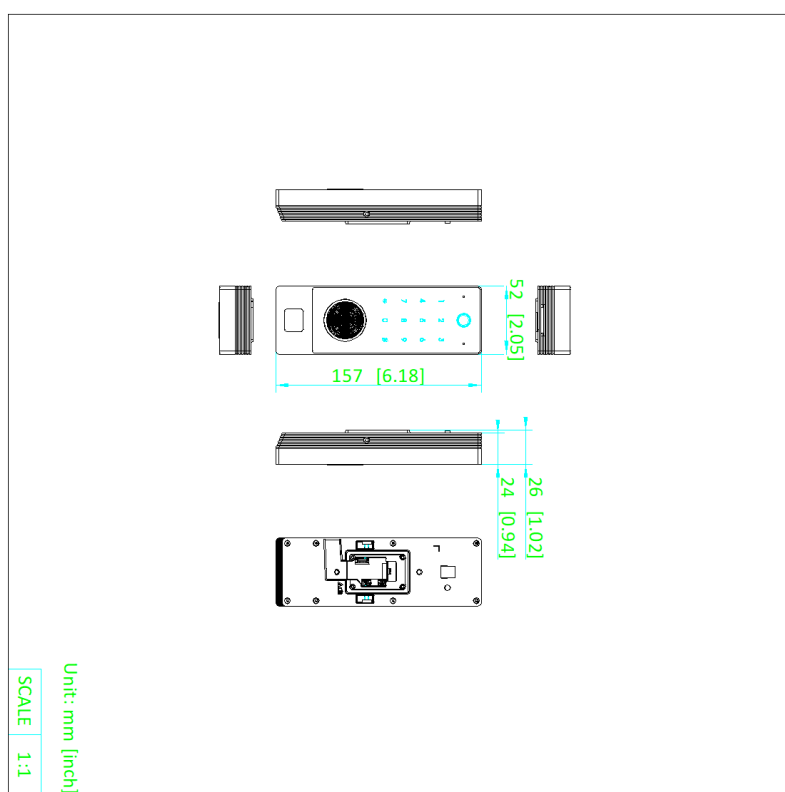

## ▪ Accessory

## ▪ Optional

DS-KAB323-B1	DS-KAB323-S1	DS-KAB323-W1
		

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

