

**DS-2CE10DF3T-LPXTS****2MP Two Way Audio Fixed Mini Bullet Camera**

- High quality imaging with 2 MP, 1920 × 1080 resolution
- 24/7 color imaging with F1.0 aperture
- Smart-Hybrid light, optimize your security with flexible lighting options
- Clear imaging against strong back light due to 130 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- Up to 20 m white light distance for bright night imaging
- Up to 25 m IR distance for bright night imaging
- Built-in mic, high quality audio with audio over coaxial cable
- Provide real-time security via built-in two-way audio
- Water and dust resistant (IP67)

## ▪ Specification

<b>Camera</b>	
Image Sensor	2 MP CMOS
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360°
Signal System	PAL/NTSC
Slow Shutter	Max. 16 times
<b>Lens</b>	
Lens Type	2.8 mm, 3.6 mm fixed focal lens
Focal Length & FOV	2.8 mm, horizontal FOV: 105°, vertical FOV: 56°, diagonal FOV: 126° 3.6 mm, horizontal FOV: 84°, vertical FOV: 46°, diagonal FOV: 98°
Lens Mount	M12
<b>Microphone</b>	
Pickup Distance	In a radius of up to 5 m
Amount	1
<b>Speaker</b>	
Rated Power	2 W
Speaker Range	In a radius of up to 5 m
<b>Functions</b>	
Audio Function	Echo Cancellation, AI Noise Reduction, Automatic Gain Control
<b>Illuminator</b>	
Supplement Light Type	Smart, IR, White Light
Supplement Light Type	White Light
Supplement Light Range	IR: Up to 25 m, White Light: Up to 20 m
<b>Image</b>	
Image Parameters Switch	STD/HIGH-SAT/HIGHLIGHT
Image Settings	Brightness, Contrast, Sharpness, Anti-banding, AGC
Frame Rate	TVI: 1080p @25 fps/30 fps
Day/Night Mode	Auto/Color
Wide Dynamic Range (WDR)	≥120 dB
Image Enhancement	WDR, BLC, HLC, Global, HLS
Noise Reduction	3D DNR
White Balance	Auto, Manual
<b>Interface</b>	
Video Output	1 HD analog output
<b>Event</b>	
Light Alarm	Flashing Light Alarm (Red and Blue)

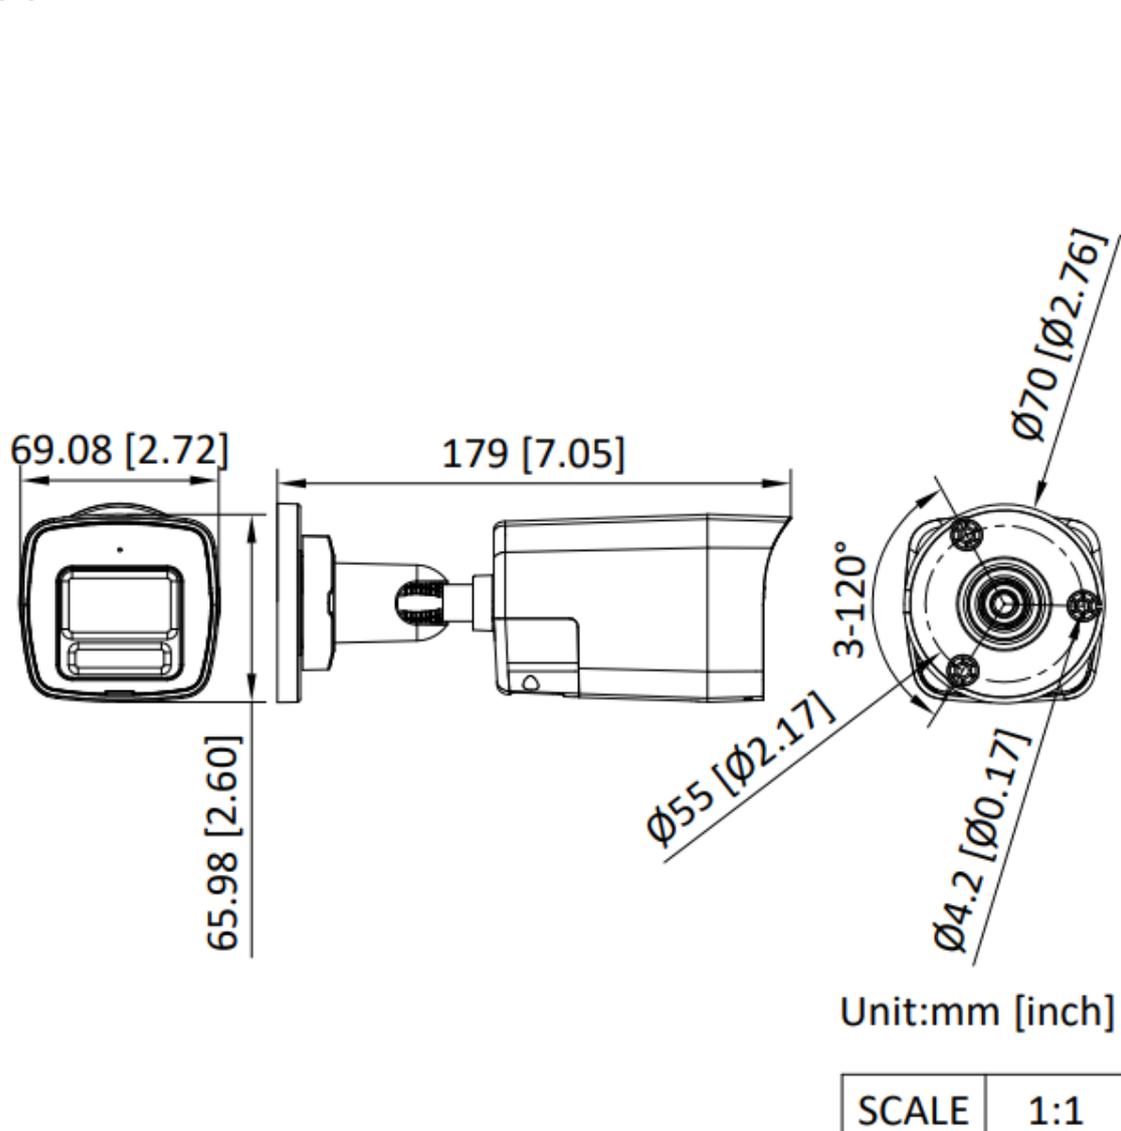
Audible Alarm	Yes
<b>General</b>	
Power	12 VDC $\pm$ 25%, max. 8.7 W *You are recommended to use one power adapter to supply the power for one camera. If a high-impedance cable is used (such as the 18 m extension cable in the kit package), a 15 VDC adapter is required.
Material	Plastic
Dimension	179 mm $\times$ 69.08 mm $\times$ 65.98 mm (7.05" $\times$ 2.72" $\times$ 2.60")
Weight	Approx. 280 g (0.62 lb.)
Operating Condition	-40 $^{\circ}$ C to 60 $^{\circ}$ C (-40 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 90% or less (non-condensing)
Communication	HIKVISION-C
Language	English
<b>Approval</b>	
Protection	IP67

▪ **Available Model**

DS-2CE10DF3T-LPXTS(2.8mm)

DS-2CE10DF3T-LPXTS(3.6mm)

▪ **Dimension**





▪ **Accessory**

▪ **Optional**

DS-1275ZJ-SUS	DS-1276ZJ-SUS	DS-1280ZJ-XS
		

▪ **Installation Methods**

<b>Vertical Pole Mounting</b> DS-1275ZJ-SUS+DS-1280ZJ-XS	<b>Corner Mounting</b> DS-1276ZJ-SUS+DS-1280ZJ-XS	<b>Junction Box</b> DS-1280ZJ-XS
		

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

