

**DS-K1T807EBWX-QRE1
Pro Fingerprint Terminal**

With touch buttons, access control terminal has stronger sense of technology in appearance; It supports Bluetooth, card, QR code and other authentication methods, making it more conveniently. The configuration is easier by supporting mobile phone Web and AP mode.

- 2.4-inch LCD screen
- Multiple authentication methods, including card (EM card), and PIN, etc.
- Max. 5000 cards and 150,000 events
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via web client
- Supports wired network and Wi-Fi (AP mode)
- Supports wiring with secure door control unit or card reader via RS-485
- Supports powered by 12 VDC or PoE and supports powering for device and door lock

▪ Specification


System	
Operating system	Linux
ROM	64MB
RAM	64MB
CPU	640 MHz
Display	
Screen size	2.4 inch
Type	LCD
Resolution	320 × 240
Audio	
Audio output	Support
Network	
Network protocol	ISAPI, ISUP 5.0
Wired network	Support
Wi-Fi	Support, 2.4 G, 802.11b/g/n
Bluetooth	Support
Interface	
Network interface	1 RJ-45, 10/100 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
Alarm input	2
Alarm output	1
RS-485	1 RS-485 (Half duplex, HIKVISION)
Wiegand	1 Wiegand (W26, W34)
USB	1
PoE	Support
Capacity	
Card capacity	5000
Event capacity	150,000
Authentication	
Card type	EM card
Card reading distance	0 to 5 cm
Card reading duration	< 1 s
General	
Power supply	12 VDC
Power consumption	≤ 6 W
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	0 to 90% (No condensing)
Language	English, Spanish (South American), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese(Brazil), Turkish, Ukrainian, Italian, French
Keypad	Support
Protective level	IP 65

Dimensions	172 mm × 76 mm × 27.5 mm (6.77" × 2.99" × 1.08")
Installation	Wall mounting
Weight	Net weight: 0.377 kg (0.831 lb) Rough weight: 0.562 kg (1.239 lb)

▪ Available Model

DS-K1T807EBWX-QRE1

▪ Dimension

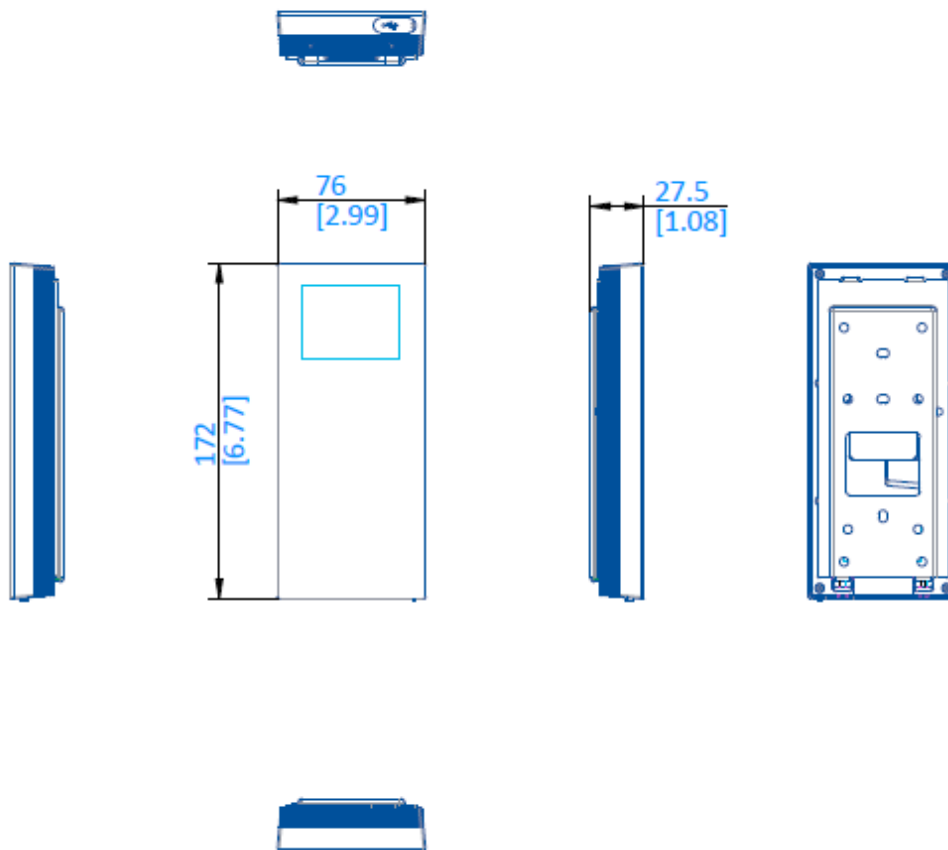

See Far, Go Further



www.hikvision.com
support@hikvision.com

