

DS-QAZ1310G1T-E(C)
Network Horn Speaker Dual POE 10W



- Rated Power: 10W
- Sensitivity(1 m, 1 W): 110 dB
- Max. SPL: 121 dB
- Frequency Response: 300 Hz to 13 kHz
- Support PoE
- Support schedule/live/emergency broadcast, alarm linkage, two-way audio, TTS
- White

▪ Specification



| Microphone | |
|--------------------------|---|
| Type | Electret |
| Amount | 2 |
| Frequency Response | 100 Hz to 20 kHz |
| Sensitivity | -42 dBV/Pa |
| Sampling Rate | 48 kHz |
| Quantization Bits | 16-bit |
| Speaker | |
| Rated Power | 10 W |
| Impedance | 8 Ω |
| Sensitivity(1 m, 1 W) | 110 dB |
| Max. Acoustic Pressure | 121 dB SPL |
| Direction | 70° horizontal by 100° vertical |
| Frequency Response | 300 Hz to 13 kHz |
| SNR | 85 dB |
| Function | |
| Audio Algorithm | AEC, AGC, ANS, DRC |
| Audio Bit Rate | G.711ulaw (64 Kbps)/G.711alaw (64 Kbps)/MP3 (128 Kbps) |
| Audio File Format | WAV, MP3 |
| NTP Timing | Support |
| Broadcast | Regular broadcast, live broadcast, emergency broadcast |
| Two-Way Audio | Support |
| Speech Synthesis | Language Type: English, Russian, Spanish, Japanese, Thai, Portuguese (Brazil), Korean, French |
| Network | |
| Network Protocol | IPv4, HTTP, HTTPS, SIP, SSL/TLS, DNS, NTP, TCP, UDP, IGMP, ICMP, DHCP, ARP, SSH |
| Interface Protocol (API) | ISAPI, ISUP, SIP, RTP, ONVIF |
| Client | Hik-Connect, ivms/4200, HikCentral Professional, Hik-Partner Pro, NVR, MileStone |
| Communication | |
| Communication Method | Support wired network communication |
| Interface | |
| Ethernet Interface | RJ45 10 M/100 M Adaptive Ethernet port × 2 |
| Alarm | Alarm input × 1 |
| Audio | Line in × 1 |
| Power Output | 12 VDC, 25 mA, 0.3 W, PoE: max. 5 W |
| Local Storage | Built-in 64 GB EMMC (Audio file storage is 55 GB.) |
| API | ISAPI, ISUP, SIP, ONVIF |
| Reset | Support |
| General | |
| Material | Metal |
| Operating Temperature | -40 °C to 60 °C (-40 °F to 140 °F) |
| Operating Humidity | < 90% (No condensation) |
| Dimension | 182.4 mm × 273.87 mm × 239.38 mm (7.18" × 10.78" × 9.42") |

| | |
|---------------------|---|
| Power | 12 VDC, 1500 mA, 18 W, PoE: IEEE 802.3at, Class 4 |
| Package Dimension | 310 mm × 245 mm × 350 mm (12.2" × 9.6" × 13.8") |
| Weight | Approx. 2.1 kg (4.63 lb.) |
| Color | White |
| With Package Weight | Approx. 3.0 kg (6.61 lb.) |
| Packing List | Device × 1 Threading cap × 1 Regulatory Compliance and Safety Information × 1 |
| Language | 41 languages: English, French, Spanish, German, Italian, Japanese, Thai, Russian, Portuguese (Brazil), Arabic, Bulgarian, Czech, Danish, Greek, Spanish (Mexico), Estonian, Persian, Finnish, Hebrew, Croatian, Hungarian, Indonesian, Kazakh, Korean, Kirgiz, Lao, Lithuanian, Latvian, Dutch, Norwegian, Polish, Portuguese, Romanian, Slovak, Slovenian, Serbian, Swedish, Turkish, Ukrainian, Uzbek, Vietnamese |
| Approval | |
| Protection | IP67, IK10 |
| EMC | CE-EMC: EN 55032:2015+A11:2020+A1:2020, EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019+A2:2021, EN 55035:2017+A11:2020 RCM: AS/NZS CISPR 32: 2015 IC: ICES-003: Issue 7 |
| Safety | CB: IEC 62368-1:2014 CE-LVD: EN 62368-1:2014/A11:2017 |
| Environment | CE-RoHS: 2011/65/EU WEEE: 2012/19/EU Reach: Regulation (EC) No 1907/2006 |

▪ Available Model

DS-QAZ1310G1T-E(C)

▪ Dimension

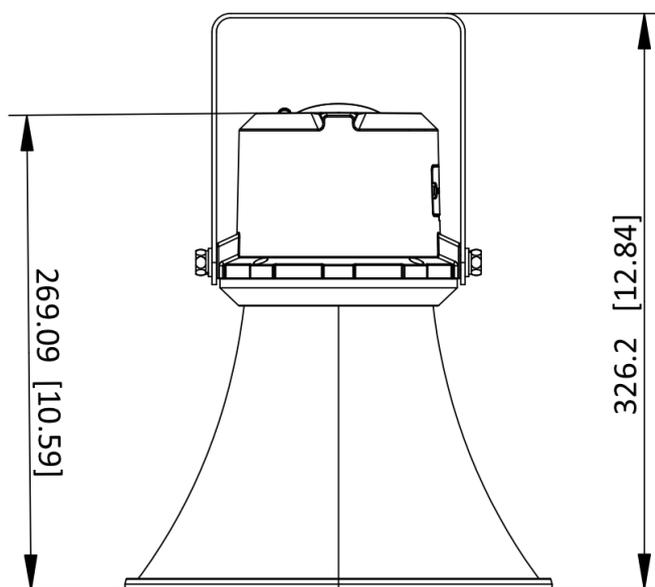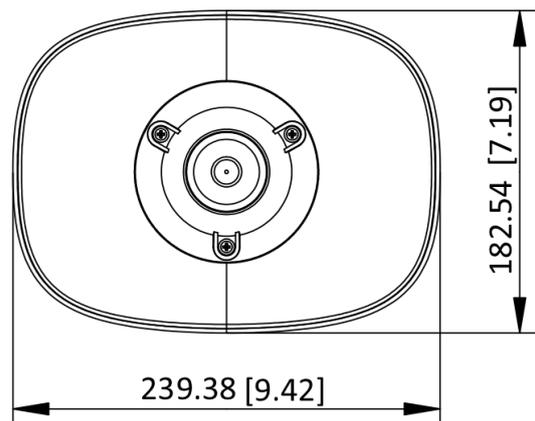

Unit: mm(inch)

See Far, Go Further



www.hikvision.com
support@hikvision.com

