

DS-KIS102-P/Surface 2 Wire Analog Kit



- 2-wire plug & play analog video kit
- One-touch calling design for easier calls
- Convenient installation and easy operation
- Aluminium alloy shell with rain cover on door station
- Supports ringing volume adjustment, ringtone change and selection on indoor station


▪ Specification



Door station	
Lens	800 TVL
FOV	Horizontal $\leq 110^{\circ}$, Vertical $\leq 65^{\circ}$
Door station	
Card capacity	50
Door station	
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Dimension (W × H × D)	63 mm × 151 mm × 41 mm (2.48" × 5.94" × 1.61")
Protective level	IP55
Indoor station	
Resolution	1024 x 600
Screen size	7-inch
Indoor station	
Power supply	100 to 240 VAC, 50 to 60 Hz
Power consumption	< 13 W
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	184 mm × 123 mm × 20 mm (7.24" × 4.84" × 0.787")

▪ Available Model

DS-KIS102-P/Surface

▪ Dimension

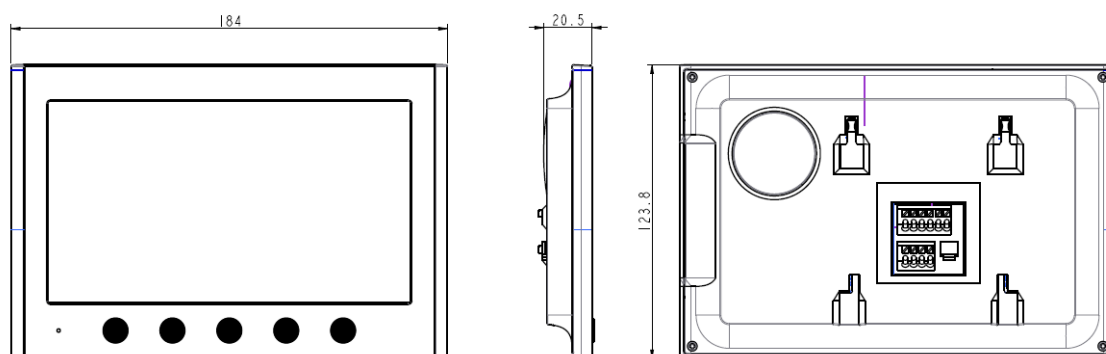

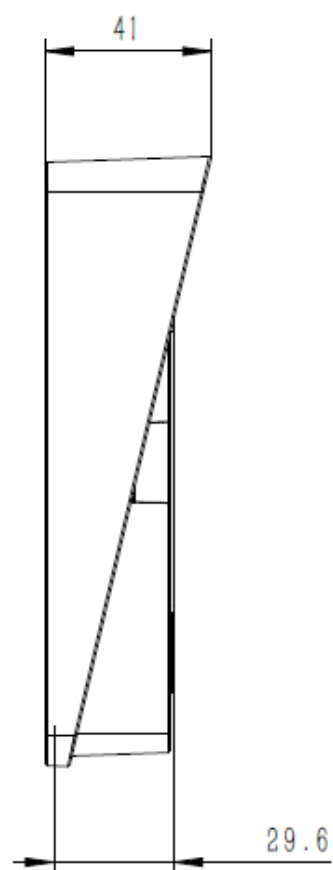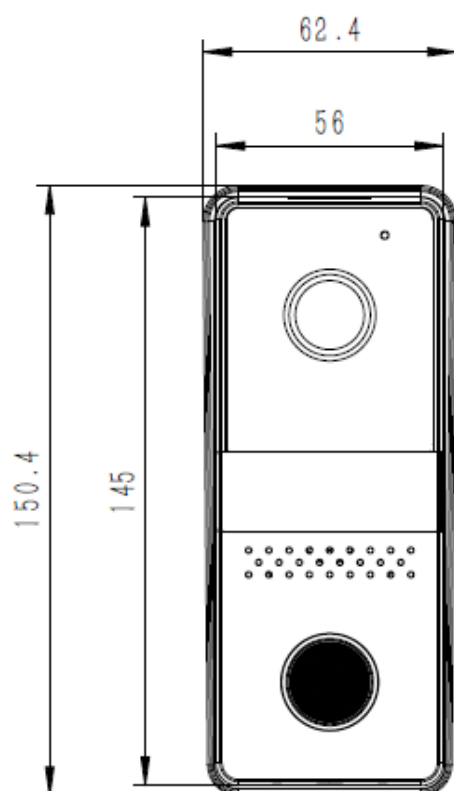

See Far, Go Further



www.hikvision.com
support@hikvision.com

