

DS-KIS103 **Audio Analog Intercom Kit**



- 2-wire plug & play analog audio kit
- One-touch calling design for easier calls
- Aluminium alloy shell with rain cover
- Supports ringing volume adjustment, ringtone change and selection
- Supports remote unlocking


▪ Specification



Audio parameters	
Ringtone volume	Indoor unit: 70~80dB (≤30cm) Outdoor unit: 50~60dB (≤30cm)
Speaker volume	Indoor unit: 65~70dB (0cm) Outdoor unit: 70~80dB (≤30cm)
General	
Protective level	IP55
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Power supply	100 to 240 VAC, 50 to 60 Hz
Power consumption	< 4.5 W

▪ Available Model

DS-KIS103

▪ Dimension

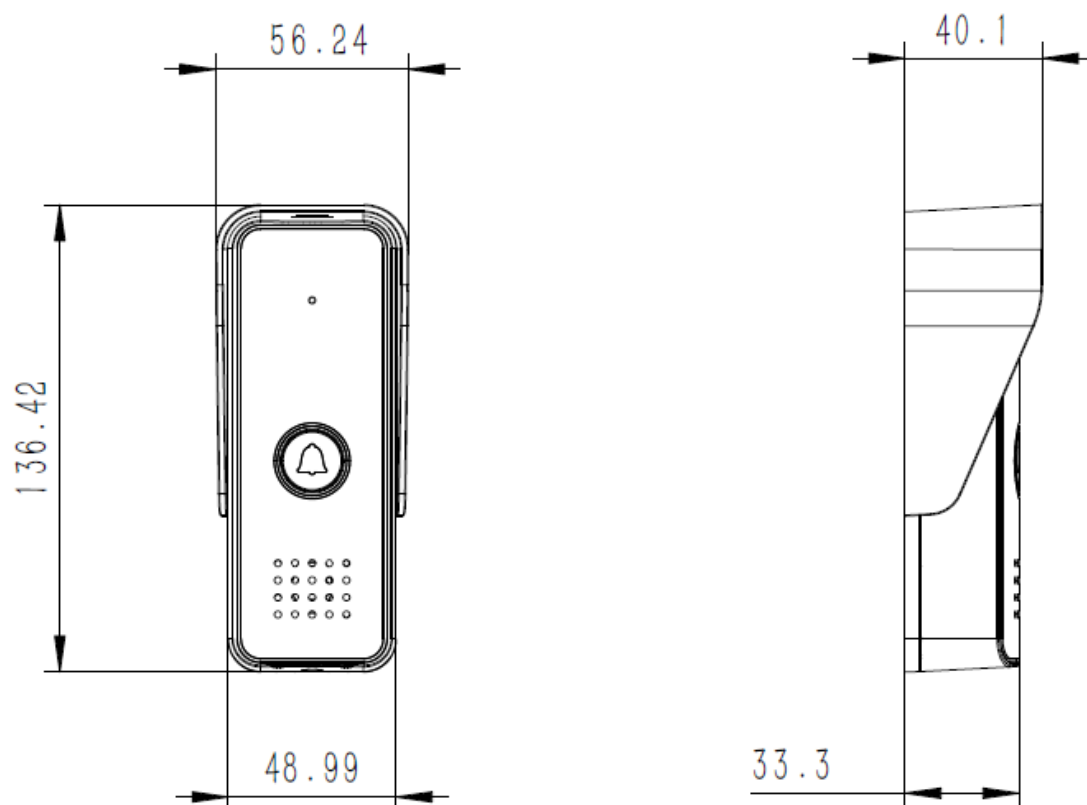

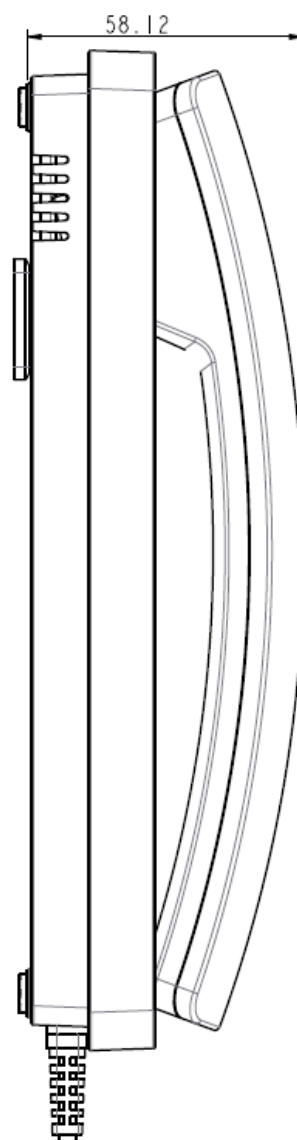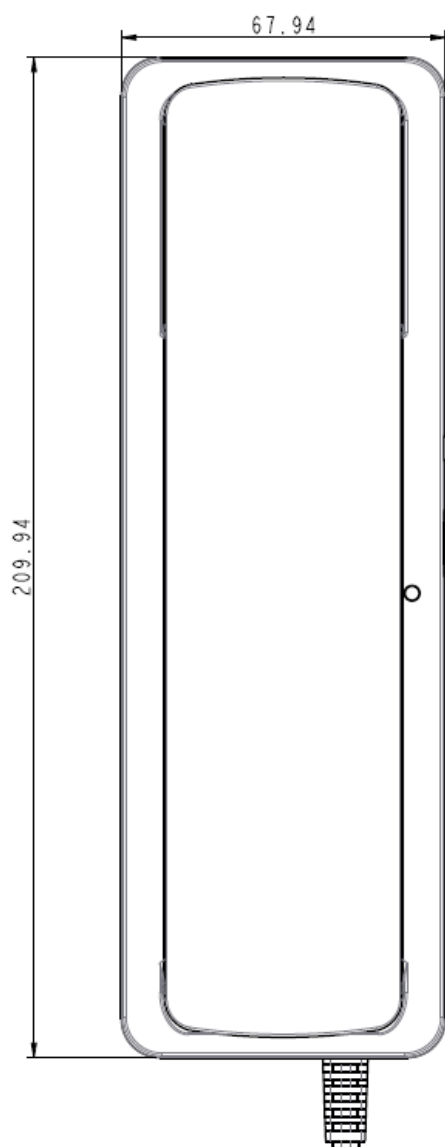

See Far, Go Further



www.hikvision.com
support@hikvision.com

