

DS-3E3752F-H 48 Port Fiber Core Switch



DS-3E3700-H Series is the latest development of Gigabit speed Layer 3 Ethernet switch. This powerful and highly secure switch series is built based on industry-leading high performance hardware architecture. It supports diversified services, high capacity GE access port as well as high density 10GE uplink, which meet the requirements for high density campus access and high performance aggregation.

- DS-3E3700-H Series provide 48 Giga and 4 fixed 10GE ports onboard with one expansion slot. The high port density satisfy the requirements for hybrid configuration of copper ports and fiber ports at the distribution layer in large sized networks or at the core layer in SMB sized networks.
- DS-3E3700-H Series comes with IPv4/IPv6 dual-stack platform which provides sophisticated IPv4/IPv6 solutions by supporting multiple tunnels, IPv4/IPv6 Layer 3 routing protocols, multicasting, and policy-based routing.
- The virtualization technology allows each slave device in the stack to serve as the backup of the master, creating control and data link redundancy, as well as uninterrupted layer-3 forwarding. This improves the reliability, avoids unplanned business downtime and serves to improve overall performance. When the master device fails, traffic remains uninterrupted.
- The switch supports unified MAC address authentication, 802.1x authentication, and portal authentication; dynamic or static binding of user identifiers such as user account, IP address, MAC address, VLAN, and port number; and dynamic application of user profiles or policies (such as VLAN, QoS, and ACL) on users.
- The switch supports Unicast Reverse Path Forwarding (uRPF), which protects a network against source spoofing attacks, preventing DoS and DDoS attacks.
- The DS-3E3700-H switch series adopts hot swappable dual-power supply, which allows you to configure AC or DC power supplies as needed. The switch can detect faults in power supplies, and will if any such faults are found, respond with an alarm. It can automatically adjust fan speed according to the temperature.
- Apart from device level redundancy, the DS-3E3700-H series switch also provides diverse link redundancy support such as LACP/STP/RSTP/MSTP/Smart Link protocols. It supports virtualization redundancy backup as well as cross-device link aggregation which substantially increases network reliability.
- The DS-3E3700-H switch series supports packet filtering at L2 (Layer 2) ~ L4 (Layer 4) , and traffic classification based on source MAC addresses, destination MAC addresses, source IP addresses, destination IP addresses, TCP/UDP port numbers, protocol types, and VLANs. It supports flexible queue scheduling algorithms based on ports and queues, including strict priority (SP), weighted round Robin (WRR), SP+WRR and WDRR. The DS-3E3700-H switch series enables committed access rate (CAR) with the minimum granularity of 8 kbps. It supports port mirroring in the outbound and inbound directions, to monitor the packets on the specific ports, and to mirror the packets to the monitor port for network detection and troubleshooting.
- The switch series supports hardware level encryption technology MACsec (802.1ae), which is an industry-standard security technology that provides secure communication for all traffic on Ethernet links. MACsec provides point-to-point security on

Ethernet links between directly connected nodes and is capable of identifying and preventing most security threats.




▪ Specification

General	
Shell	Metal
Net Weight	6.70 kg (14.77 lb)
Gross Weight	7.70 kg (16.97 lb)
Dimensions (W × H × D)	440.00 mm × 360.00 mm × 43.60 mm (17.32" × 14.17" × 1.71")
Operating Temperature	-5 °C to 45 °C (23 °F to 113 °F)
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Operating Humidity	10% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	AC : 100 V ~ 240 V AC , 50/60 Hz
Installation Mode	Rack (equipped with mounting ears)
Max. Power Consumption	Single AC input: 130 W Dual AC inputs: 134 W Single DC input: 132 W Dual DC inputs: 140 W
Network Parameters	
Ports	48 × Gigabit fiber optical port, 4 × 10G fiber optical port
MAC Address Table	64 K
Internal Cache	4 Mbits
Switching Capacity	Whole-Device Performance: 336 Gbps Port Performance: 216 Gbps
Packet Forwarding Rate	Whole-Device Performance: 252 Mpps Port Performance: 160.7 Mpps
Software Function	
VLAN	Port-based VLAN MAC-based VLAN Protocol-based VLAN QinQ and selective QinQ
IP Routing	Static routing RIPv1/v2 and RIPv6 OSPFv1/v2/v3 BGP and BGP4+ for IPv6
Multicast	IGMP Snooping /MLD Snooping、 Multicast VLAN
QoS	802.1p DSCP remarking Flexible queue scheduling algorithms based on ports and queues, including SP, WRR, WFQ and SP+WRR Committed access rate (CAR) Packet redirection Port rate limit (receiving and transmitting)
ACL	Packet filtering at L2 ~ L4 Traffic classification based on source MAC addresses, destination MAC addresses, source IPv4/IPv6 addresses Time range-based ACL VLAN-based ACL Bidirectional ACL

Security	<p>Hierarchical user management and password protection</p> <p>Guest VLAN</p> <p>802.1X authentication, centralized MAC authentication</p> <p>RADIUS authentication</p> <p>MAC address learning limit</p> <p>Port isolation</p> <p>IP Source guard</p> <p>Dynamic ARP inspection, preventing man-in-the-middle attacks and ARP DoS attacks</p> <p>IP/Port/MAC binding</p>
System Management	<p>Configuration through CLI, Telnet, and console port</p> <p>Ping, Tracert</p> <p>Loading and upgrading through XModem/FTP/TFTP</p> <p>SNMPv1/v2/v3 and Web-based NMS</p> <p>Remote monitoring (RMON) alarm, event, and history recording</p> <p>NTP</p>
Approval	
EMC	CE-EMC (EN 55032:2015+A11: 2020, EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035:2017+A11: 2020)
Safety	CB (AMD1:2009, AMD2:2013, IEC 62368-1:2014 (Second Edition))
Chemistry	CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006)

▪ Typical Application

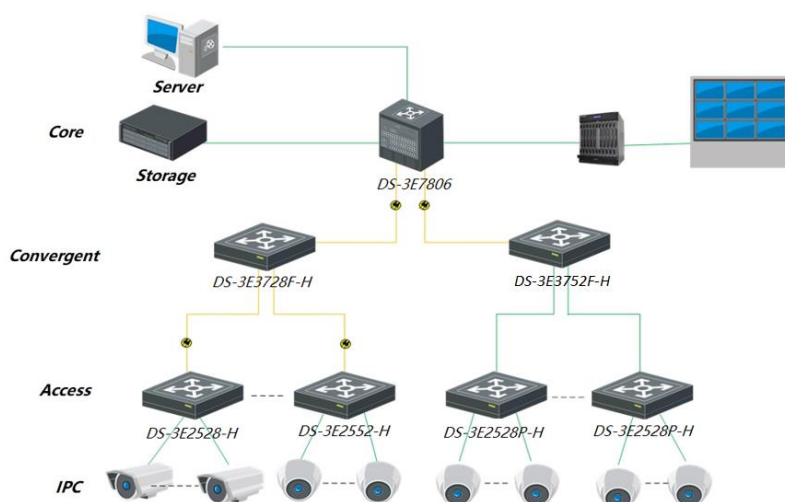

▪ Available Model

DS-3E3752F-H

▪ Dimension

See Far, Go Further



www.hikvision.com
support@hikvision.com

