

## DS-D5A75RB/A2 75-inch 4K Interactive Display



- UHD 4K display with resolution of 3840 × 2160.
- Android 14.0 System, EDLA Certified.
- Anti-glare and anti-blocking design to ensure smooth interaction.
- Dual systems of Android and Windows (optional) saving cost and easy to use, video conference software are recommended to run under Windows system.
- Quick response, at most 40-point touch controls and smooth writing experience.
- Compatible with OPS/OPS-C devices, realizing smooth switch between built-in systems.


## ▪ Specification

| Product Model        |                                                                   |
|----------------------|-------------------------------------------------------------------|
| Product Model        | DS-D5A75RB/A2                                                     |
| Display              |                                                                   |
| Screen Size          | 75 inch                                                           |
| Backlight            | DLED                                                              |
| Resolution           | 3840 × 2160 @60 Hz                                                |
| Brightness           | 400 cd/m <sup>2</sup> (Typ.)                                      |
| Color Depth          | 10 bit                                                            |
| Display Color        | 1.07 G                                                            |
| Response Time        | ≤ 8 ms                                                            |
| Panel Type           | IPS                                                               |
| Contrast Ratio       | 1200:1 (Static)<br>15,000:1 (Dynamic)                             |
| Color Gamut          | 72% NTSC (CIE1931) (Typ.)                                         |
| Pixel Pitch          | 0.4296 (H) × 0.4296 (V) mm                                        |
| Refresh Rate         | 60 Hz                                                             |
| Viewing Angle        | 178°(H)/178°(V)                                                   |
| Aspect Ratio         | 16:9                                                              |
| Surface Haze         | 25% Haze                                                          |
| Display Area         | 1649.66 (H) × 927.94 (V)                                          |
| Working Duration     | 7×18 H                                                            |
| Surface Hardness     | ≥ 9H (Pencil)<br>5H (Mohs)                                        |
| Surface Glass        | Anti-Glare Glass                                                  |
| Transmittance        | ≥ 88%                                                             |
| Lifespan             | 30,000 hours                                                      |
| Glass Bonding Method | Zero Lamination                                                   |
| Touch                |                                                                   |
| Touch Point          | Up to 40-point multi-touch                                        |
| Touch Response Time  | ≤ 5 ms                                                            |
| Minimum Touch Object | ≥ 3 mm                                                            |
| Touch Precision      | ± 1 mm (90% touching area)                                        |
| Touch Resolution     | 32768 × 32768                                                     |
| Type                 | Infrared Touch Screen                                             |
| Built-in System      |                                                                   |
| Operation System     | Android 14.0                                                      |
| Processor            | Quad-core Cortex-A73 × 4 (1.5 GHz)                                |
| Memory               | 8 GB                                                              |
| Built-in Storage     | 128 GB                                                            |
| HDCP Version         | 2.2 & 1.4                                                         |
| GPU                  | Mali-G52 MC1                                                      |
| Internal Function    |                                                                   |
| Loudspeaker          | Built-in 2 × 15 W                                                 |
| Bluetooth            | Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.4 |
| Light Sensor         | Yes                                                               |


| Interface                                    |                                                                                                                                                       |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video & Audio Input                          | HDMI IN× 2(Rear × 2; HDMI 2.1; HDMI1&HDMI2 Support CEC, HDMI1 Support ARC)<br>HDMI IN × 1(Front × 1; HDMI 2.1; Support CEC)<br>AUDIO IN × 1(Rear × 1) |
| Video & Audio Output                         | HDMI Out × 1(HDMI 2.1)<br>AUDIO Out × 1(Rear × 1)                                                                                                     |
| Network Interface                            | LAN (100 Mbps) × 2(Rear × 2)<br>WIFI AP & Station, 2.4G/5G(WIFI6)                                                                                     |
| Data Transmission Interface                  | USB 2.0 × 2(Front × 1; Rear × 1)<br>USB 3.0 × 1(Rear × 1)<br>Type-C × 2(Rear × 1, charging 15 W, supports DP 1.2; Front × 1, supports USB 2.0)        |
| Control Interface                            | TOUCH-USB × 2(Front × 1, USB 2.0; Rear × 1, USB 2.0)<br>RS232 IN × 1(Rear × 1)                                                                        |
| Power                                        |                                                                                                                                                       |
| Power Supply                                 | 100 to 240 VAC, 50/60 Hz                                                                                                                              |
| Standby Consumption                          | ≤ 0.5 W                                                                                                                                               |
| Max. Consumption                             | 198 W                                                                                                                                                 |
| Average Consumption                          | 167 W                                                                                                                                                 |
| Working Environment                          |                                                                                                                                                       |
| Working Temperature                          | 0 °C to 40 °C (32 °F to 104°F)                                                                                                                        |
| Working Humidity                             | 20%~80% RH                                                                                                                                            |
| General                                      |                                                                                                                                                       |
| Package Dimensions (W × H × D)               | 1860 × 1125 × 185 mm                                                                                                                                  |
| VESA                                         | 400 mm × 400 mm (4 × M8-25 mm)                                                                                                                        |
| Net Weight                                   | 42.18 kg                                                                                                                                              |
| Gross Weight                                 | 55.22kg                                                                                                                                               |
| Accessory                                    | Wall mount bracket, hook, user manual, touch writing pen, packing list, 3 M power cable.                                                              |
| Product Dimensions (With Wall Attachment)    | 1705 × 1015.7 × 133.3 mm                                                                                                                              |
| Product Dimensions (Without Wall Attachment) | 1705 × 1015.7 × 98.8 mm                                                                                                                               |


## ▪ Physical Interface

| Interface    | Description                    | Interface   | Description                |
|--------------|--------------------------------|-------------|----------------------------|
| 1. LAN 1     | LAN 1 interface                | 2. LAN 2    | LAN 2 interface            |
| 3.RS 232     | RS 232 Control interface       | 4.MIC IN    | MIC IN interface           |
| 5.Audio out  | Audio out interface            | 6.TOUCH-USB | Peripheral touch interface |
| 7.HDMI IN 1  | HDMI 1 input interface         | 8.HDMI IN 2 | HDMI 2 input interface     |
| 9.TYPE-C     | Type-C interface with DP input | 10.USB      | USB 3.0 interface          |
| 11.USB       | USB 2.0 interface              | 12.HDMI OUT | HDMI output interface      |
| 13.TOUCH-USB | Peripheral touch interface     | 14.HDMI IN  | HDMI input interface       |
| 15.USB       | USB 2.0 interface              | 16.TYPE-C   | Type-C interface           |

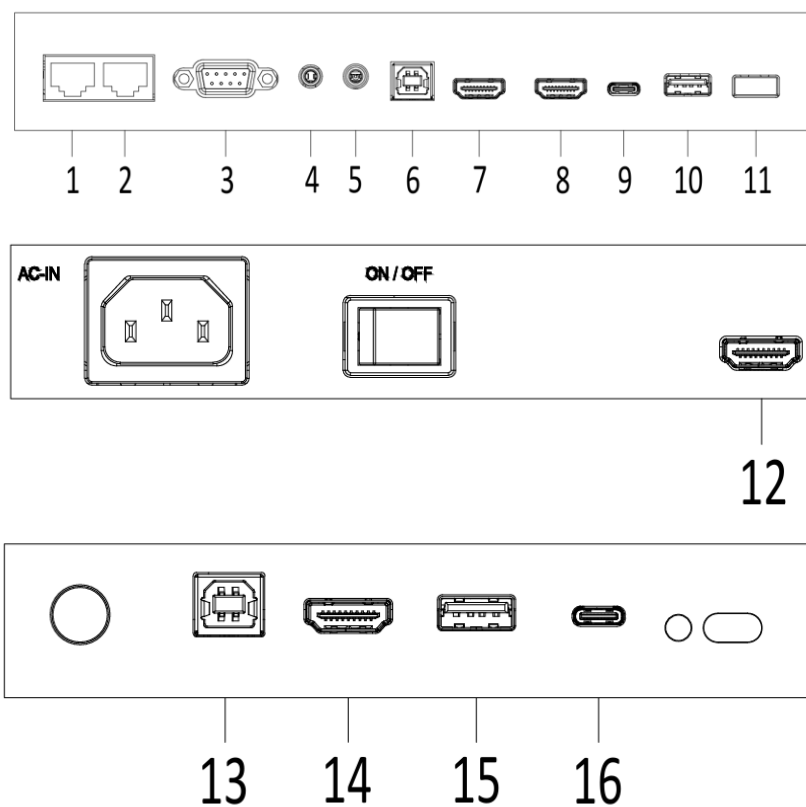

## ▪ Installation

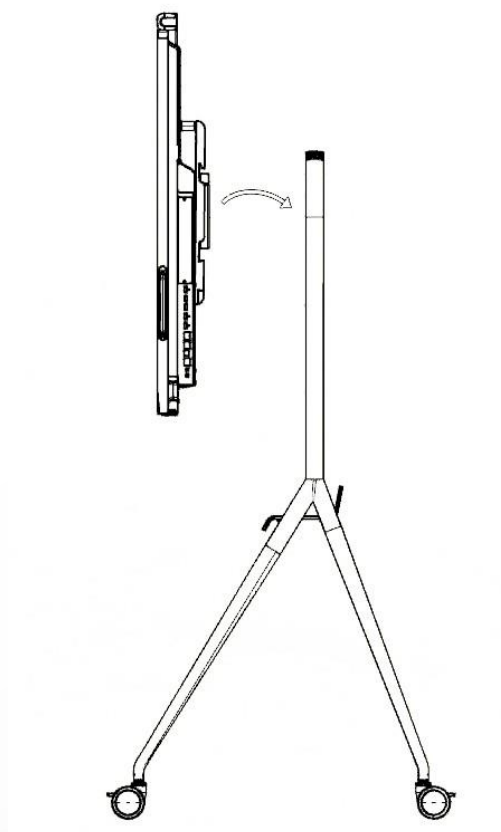


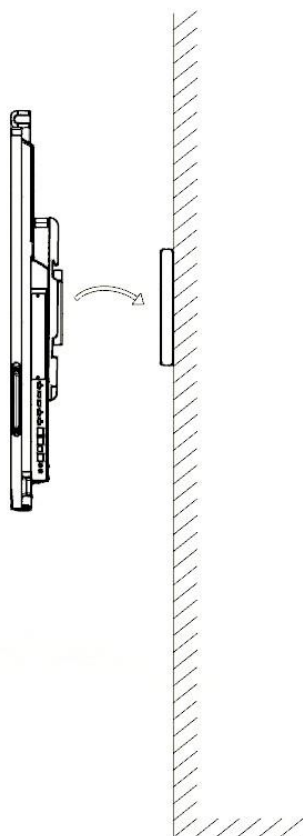

- **Available Model**

DS-D5A75RB/A2

- **Dimension**

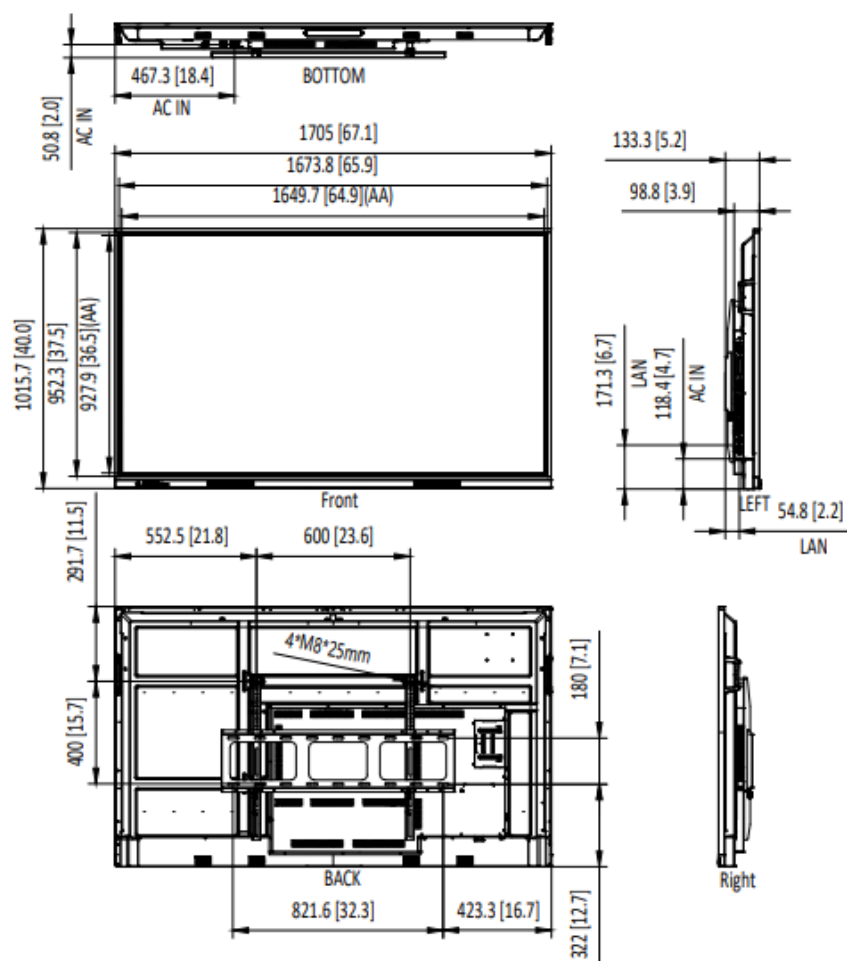

## ▪ Accessory

### ▪ Optional

| DS-D5ABKE1-A50                                                                      | DS-D5ABKY2-S                                                                        | DS-D5ABKY3-SL                                                                       | DS-D5AC12T7-16S5                                                                     | DS-D5AC12T5-8S2                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| DS-D5SC3B-B                                                                         | DS-D5SC3B-W                                                                         |                                                                                     |                                                                                      |                                                                                       |



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HIKVISION**<sup>®</sup>