

DS-XS6609-S/B
Wall Mounted Cabinet



- The enclosures conform to 19-inch mounting standards, are compatible with ETSI standard equipment installations, and are designed for rack-mounted equipment in cabling, telecom, IT, industrial, and home.


▪ Specification

Model		DS-XS6609-S/B
Specifications	Installation Method	Wall-mounted
	Internal Space	9U
	Static Load Capacity	40KG
	Dimensions (W*D*H) mm	600*600*500mm
	Net Weight	23KG
Parameters	Opening Percentage (Front Door)	78%
	Opening Percentage (Rear Door)	0
	Front Door	4mm Glass door,1mm SPCC
	Front and Rear Frame	1.2mm SPCC
	Side Panel	1.0mm SPCC
	Beam	1.2mm SPCC
	Top Cover	1.0mm SPCC
	Bottom panel	1.0mm SPCC
	Vertical rail	1.5mm SPCC
	Rear panel	1.0mm SPCC
	Mounting bracket	1.2mm SPCC
Others	Shelf	Optional
	FAN	Optional
	PDU	Optional
	Mounting Accessory Kit	User accessory kit:12 sets M6 cage nuts; 2 pcs keys ; 4 sets Expansion screws Mounting kit: 16 pcs M8*12 hex screws, 16 pcs M8 flange nuts, 12 pcs M4 tapping screws, 12 sets M6 cage Nuts, 1 pcs small round lock, 1 pcs hex wrench, 1 pcs ABS white isolation post, 1 pcs installation instructions

▪ Available Model

DS-XS6609-S/B(Overseas)

▪ Dimension

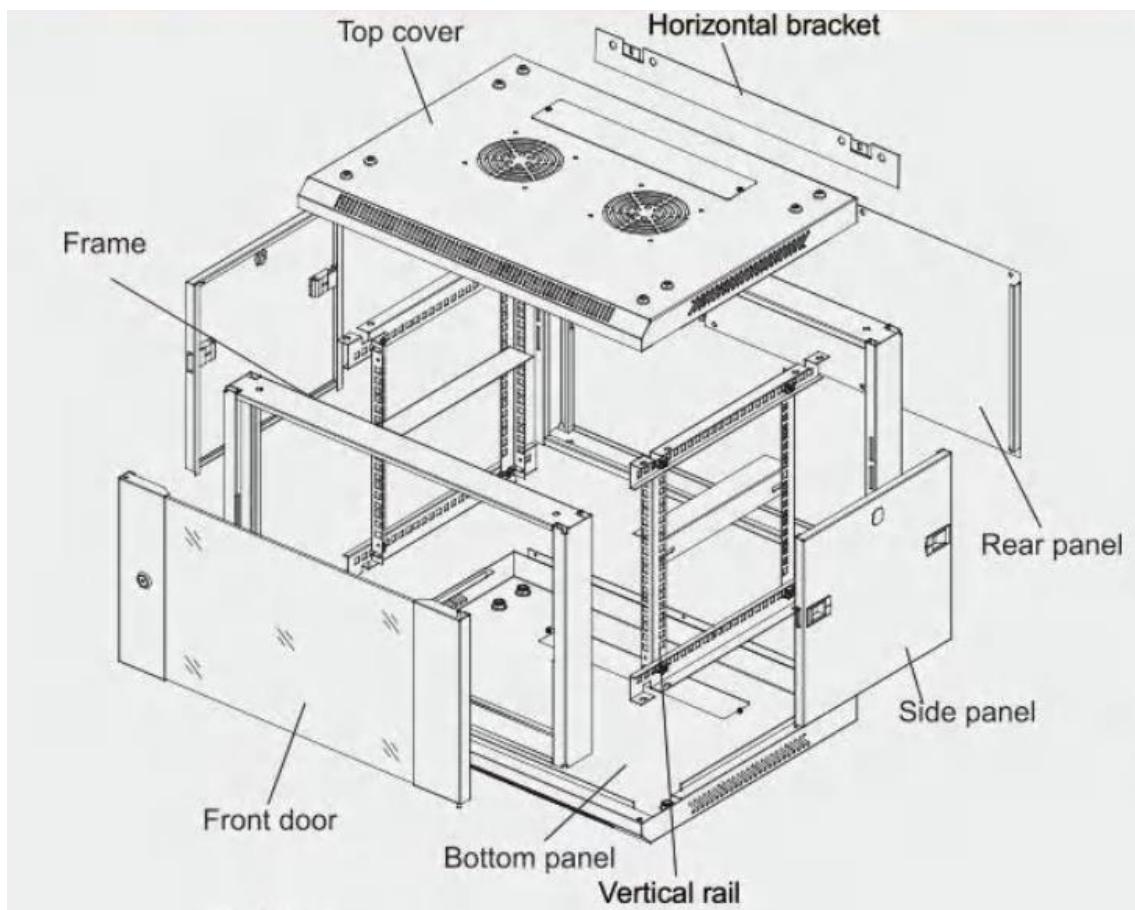

▪ Accessory

▪ Optional

FD1238A2 Two-unit cabinet fan, European standard plug	DS-XSPB04-S/B Standard tray for 600mm width cabinet	DS-XPUK06-Y/KYL 6-ports 13A British standard PDU	DS-XPEUR08-Y/KYL 8-ports 16A European standard PDU
			

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®