

**DS-XS6606-S/B**  
**Wall Mounted Cabinet**



- The enclosures conform to 19-inch mounting standards, are compatible with ETSI standard equipment installations, and are designed for rack-mounted equipment in cabling, telecom, IT, industrial, and home.


## ▪ Specification

Specifications	
Installation Method	Wall-mounted
Internal Space	6U
Static Load Capacity	40KG
Dimensions (W*D*H) mm	600*600*370mm
Net Weight	19.5KG
Parameters	
Opening Percentage (Front Door)	78%
Opening Percentage (Rear Door)	0
Front Door	4mm Glass door,1mm SPCC
Front and Rear Frame	1.2mm SPCC
Side Panel	1.0mm SPCC
Beam	1.2mm SPCC
Top Cover	1.0mm SPCC
Bottom panel	1.0mm SPCC
Vertical rail	1.5mm SPCC
Rear panel	1.0mm SPCC
Mounting bracket	1.2mm SPCC
Others	
Shelf	Optional
FAN	Optional
PDU	Optional
Mounting Accessory Kit	User accessory kit:12 sets M6 cage nuts; 2 pcs keys ; 4 sets Expansion screws  Mounting kit:16 pcs M8*12 hex screws, 16 pcs M8 flange nuts, 12 pcs M4 tapping screws, 12 sets M6 cage Nuts, 1 pcs small round lock, 1 pcs hex wrench, 1 pcs ABS white isolation post, 1 pcs installation instructions

## ▪ Available Model

DS-XS6606-S/B(Overseas)

## ▪ Dimension

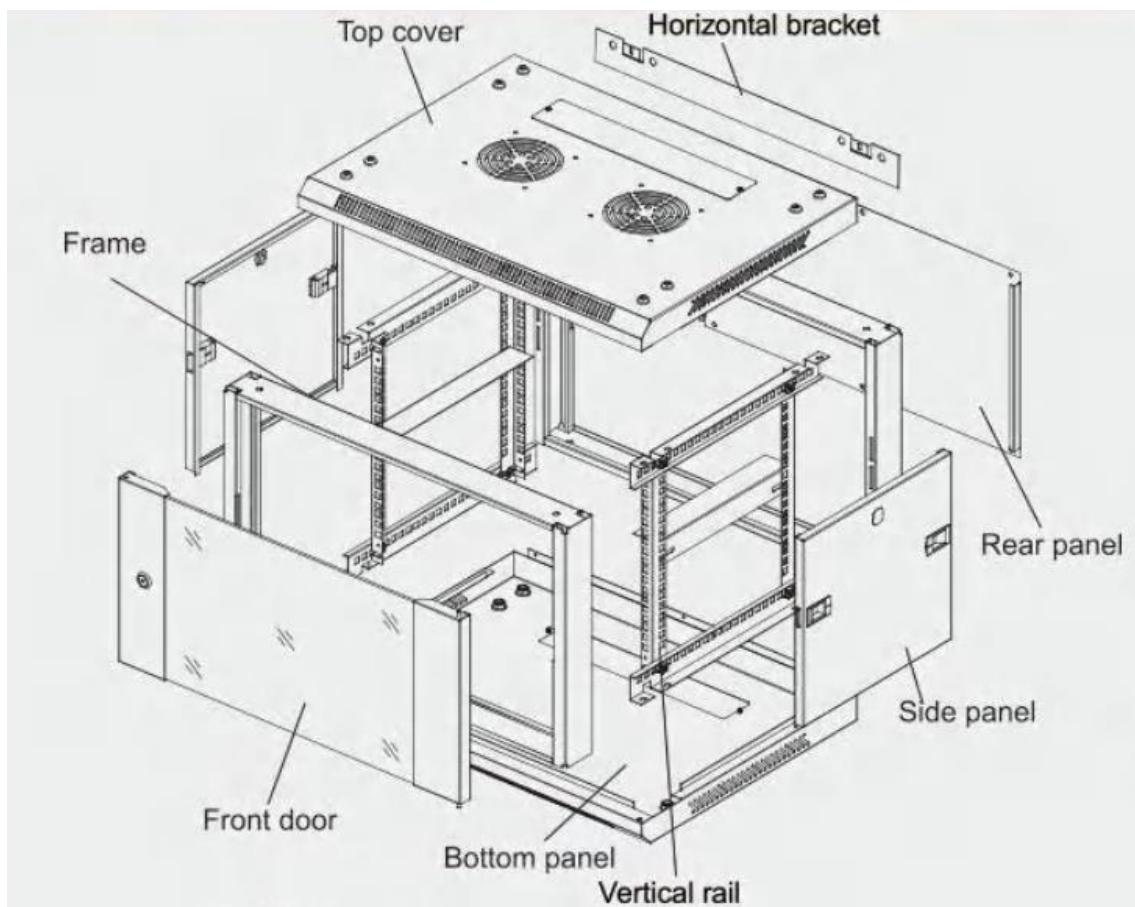

- **Accessory**

- **Optional**

DS-XPEUR08-Y/KYL	FD1238A2	DS-XPUK06-Y/KYL	DS-XSPB04-S/B

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HIKVISION®**