

DS-UPSB09xxB-R/TJ Battery Pack




Specification

ecincation				
Model		DS-UPSB0924B-R/TJ	DS-UPSB0948B-R/TJ	DS-UPSB0972B-R/TJ
Battery	Battery Type	VRLA (Lead acid maintenance free battery)		
	Typical Recharging	$6{\sim}8$ hours (To 90% of full capacity)		
	Time			
	Capacity (Standard	12V/9Ah		
	Unit)			
	Battery Number	4	8	12
	DC System Voltage	24V	48V	72V
	(VDC)			
	Charging Current	/		
	(Max.)			
Environment	Operating	0°C∼40°C		
	Temperature			
	Humidity Range	$0{\sim}$ 95% (Non condensing)		
	Noise Level	<40dB at 1 Meter		
Physical	Dimension W x D x H	440 x 430 x 86.5	440 × 550 × 86.5	440 × 710 × 86.5
	(mm)			
	Net weight (kg)	17.4	31.5	44




Physical Interface


DS-UPSB0924B-R/TJ

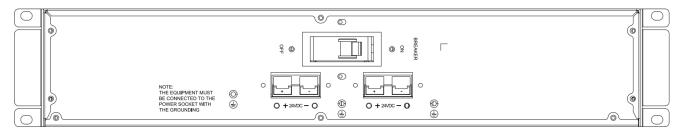

DS-UPSB0948B-R/TJ

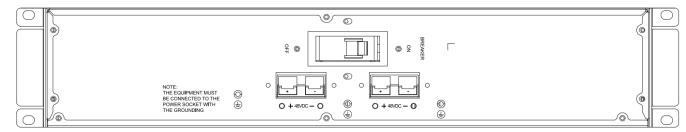

DS-UPSB0972B-R/TJ

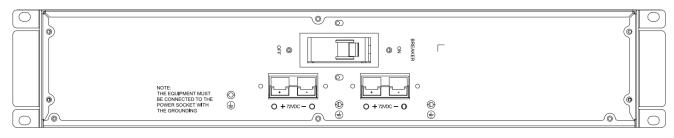

See Far, Go Further



www.hikvision.com support@hikvision.com













