

## DS-QAZ1MP10G1 Network Paging Station



- Linux system, 10.1-inch color IPS touch screen
- Support importing local audio sources (formats: MP3 and WAV) via the web and storing them in the program management folder
- Support real-time broadcast and real-time speaking for all, some, or a single specified terminal
- Support file broadcast, text-to-speech broadcast, real-time broadcast, and emergency broadcast
- Support applying scheduled tasks to the terminal, so that the terminal can still play the scheduled tasks at the specified time in case of network interruptions and other situations
- Support partition settings for terminal, including adding and deleting partitions
- When receiving alarm input or alarm signal, the system can trigger specified broadcast terminals to play preset audio
- Support managing up to 50 terminals and support intercom with network speakers and network column speakers
- Support wired network access and standard PoE power supply, making installation more convenient
- Features an aluminum alloy bracket for multi-angle placement and wall mounting

## • Specification


Wi-Fi	
Antenna	Built-in antenna
Channel Bandwidth	20 MHz
Encryption Mode	WEP, WPA-personal, WPA2-personal
Wi-Fi Protocol	IEEE802.11b, 802.11g, 802.11n
Wireless Range	50 m
Microphone	
Type	electret
Frequency Response	50 Hz to 16 kHz
Sensitivity	-42 dB±2 dB (0db=1V/Pa at 1KHz)
Impedance	Output Impedance: 680 Ω (at 1KHz)
Speaker	
Speaker Type	<p>1. Built-in Speaker:  Rated Impedance: 8 Ω  Rated Power: 1 W  Resonant Frequency: 950 Hz  Sensitivity: 93 dB (Test Condition: 0.1 m @1 W)</p> <p>2. Earpiece:  Rated Impedance: 6 Ω  Rated Power: 0.1 W  Resonant Frequency: 650 Hz  Sensitivity: 94 dB (Test Condition: 0.1 m @1 W)</p> <p>3. External Speaker  Rated Impedance: 8 Ω  Rated Power: 2 W  Resonant Frequency: 650 Hz  Sensitivity: 100 dB (Test Condition: 0.1 m @1 W)</p>
Function	
Audio Bit Rate	Broadcast : MP3 128Kbps Two-Way Audio : G711 64kbps
Audio File Format	Format: MP3, WAV Bit Width: 16bit Maximum Single File Size: 100 MB
Echo Cancellation	Support
Memory Size	32 GB
Flash Size	32 GB
Network	
Network Protocol	ISAPI, SNTP
Interface	
Alarm	2 alarm inputs 2 alarm outputs

Network Interface	1 RJ45 10 M/100 M/1000 M adaptive Ethernet port 1 POE ( IEEE 802.3AT class 4 )
Local Storage	EMMC
RS-485	1
Display Screen	Type: IPS Size: 10.1 inches Resolution: 1280 × 800 Touch: Support
<b>General</b>	
Power	12 VDC, Standard POE (IEEE 802.3AT class 4), 18 W
Operating Condition	-10 °C to +50 °C(14 °F to 122 °F), humidity 10% to 90%
Dimension	246 mm × 166 mm × 32 mm (9.69" × 6.54" × 1.26") (L × W × H)
Package Dimension	474 mm × 345 mm × 85 mm (18.66" × 13.58" × 3.35") (L × W × H)
Weight	1.28 kg (2.82 lb.)
With Package Weight	2.53 kg (5.58 lb.)

## ▪ Available Model

DS-QAZ1MP10G1

## ▪ Dimension

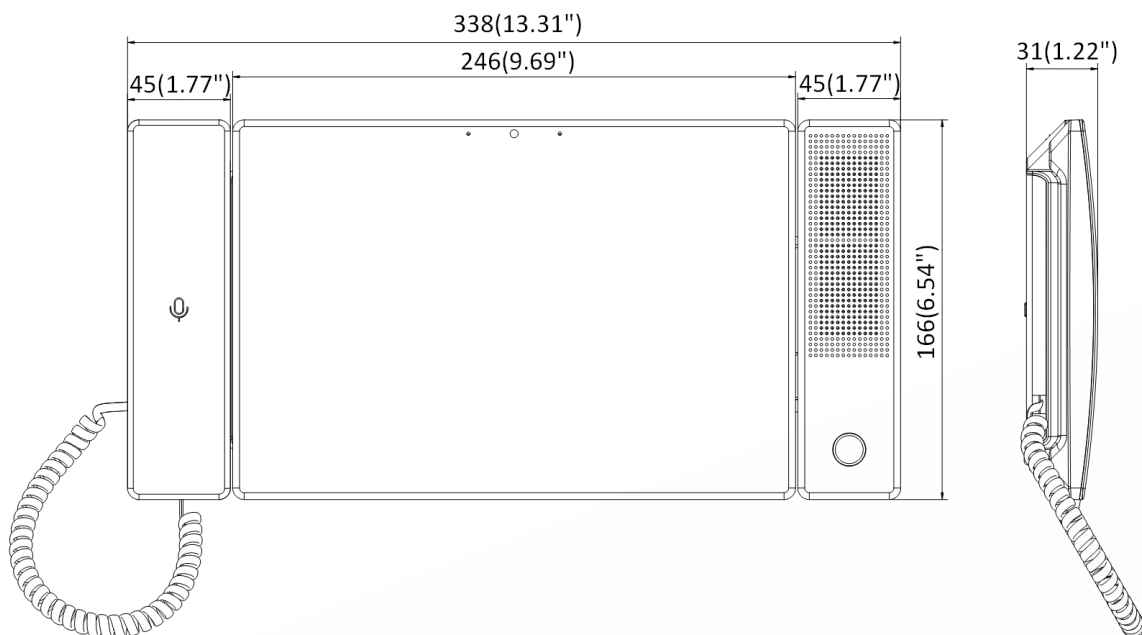

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

