DS-7764NI-K4(中性)
64-ch 1.5U 4K NVR






- Up to 64 channel IP cameras can be connected
- Up to 16-ch@1080p decoding capacity
- Support 1 HDMI and 1 VGA interfaces, and HDMI interfaces support independent video output
- 4 HDDs for continuous video recording
- H.265+/H.265/H.264+/H.264 video formats
- Up to 320 Mbps incoming bandwidth

▪ Specification

Video and Audio	
IP Video Input	64-ch
IP Speaker Input	4-ch
Incoming Bandwidth	320 Mbps
Outgoing Bandwidth	100 Mbps
HDMI Output	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz
Video Output Mode	HDMI/VGA independent output
CVBS Output	N/A
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)
Decoding	
Decoding Format	H.265, H.265+, H.264, H264+
Recording Resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	16-ch
Decoding Capability	2-ch@12MP (30fps)/4-ch@8 MP (30 fps)/8-ch@4 MP (30 fps)/16-ch@1080p(30 fps)
Stream Type	Video, Video & Audio
Live View Window Division	1/2/4/6/8/9/16/25/36/64 *NVR supports 64-window division when output resolution is 1080P or lower with simultaneous video output.
Audio Compression	G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2
Network	
Remote Connection	128
API	ONVIF (profile S/G); SDK; ISAPI
Compatible Browser	IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Network Interface	2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces
Auxiliary Interface	
SATA	4 SATA interfaces
Capacity	Up to 16 TB capacity for each HDD
Serial Interface	2 RS-485 (half-duplex), 1 RS-232
Alarm In/Out	16/4
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
General	
GUI Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian
Power Supply	100 to 240 VAC, 50 to 60Hz
Consumption	≤ 50 W (without HDD)
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)

Working Humidity	10 to 90 %
Dimension (W × D × H)	440 × 389 × 72 mm (17.32 × 15.31 × 2.81 inch)
Weight	≤ 5 kg (without HDD, 11 lb.)

▪ Physical Interface

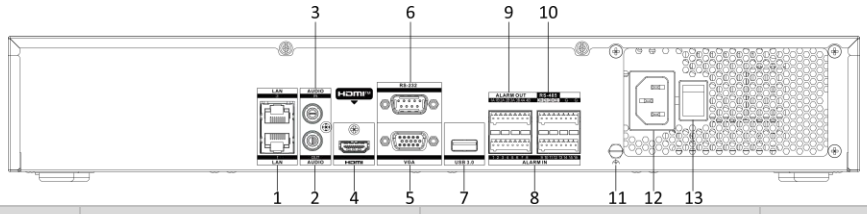


Number	Description	Number	Description
1	LAN network interface	8	ALARM IN
2	AUDIO OUT	9	ALARM OUT
3	AUDIO IN	10	RS-485 interface
4	HDMI interface	11	GND
5	VGA interface	12	Power Supply
6	RS-232 interface	13	Power Switch
7	USB 3.0 interface		

▪ Available Model

DS-7764NI-K4

▪ Dimension

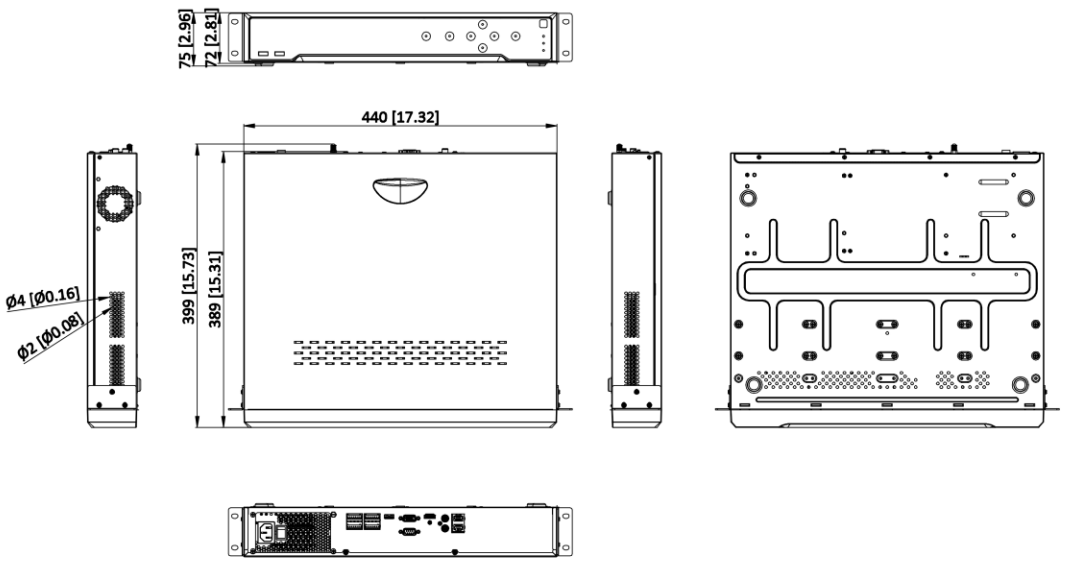

Unit:mm [inch]

SCALE	1:1

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®