

iDS-MCD402-ES 4G Dual-lens ANPR Portable Speed Dome Kit



- Support for dual cameras, Lens1 : 1/1.8" progressive scan CMOS; Lens2 : 1/1.8" CMOS
- 36× optical zoom, 12× digital zoom
- 3D DNR/Defog/EIS
- Up to 100 m IR distance
- Quick installation with the magnetic base and the tripod bracket
- Replaceable battery for sustainable work
- 360° endless pan and -20° to 90° (auto-flip) tilt movement range for PTZ
- Embedded screen for status display, e.g. battery, GPS, 3G/4G, record status, storage capacity, Bluetooth, platform access, Wi-Fi, and smart algorithm mode
- Supports accessing via IE browser and client, and remote operation

▪ Specification

Camera	
Image Sensor	Lens 1 : 1/1.8" progressive scan CMOS Lens 2 : 1/1.8" progressive scan CMOS
Zoom	36x Optical, 12x Digital
Max. Resolution	3840 x 2160
Min. Illumination	Lens 1 : chromatic : 0.005 Lux @ (F1.3 , AGC ON) ; monochrome : 0.0005 Lux @ (F1.3 , AGC ON) Lens 2 : chromatic : 0.02 Lux @ (F1.7 , AGC ON) ; monochrome : 0.02 Lux @ (F1.7 , AGC ON)
Day & Night	Switch IR Cut Filter Automatically
Optical Image Stabilization	Supported
Lens	
Focal Length	Lens 1: 6~216 mm Lens 2: 2.8 mm fixed lens
Aperture	Lens 1: F1.3 - F4.6 Lens 2: F1.7
FOV	Lens 1: Horizontal FOV: 59° to 2.0°, Vertical FOV: 34.2° to 1.1° , Diagonal FOV: 67.1° to 2.3° Lens 2: Horizontal FOV: 102°, Vertical FOV: 56°, Diagonal FOV: 123°
Zoom Speed	Approx. 4.6 s (optical lens, wide-tele)
Event	
Smart Event	Vehicle recognition, face recognition, helmet detection, phone call, workwear detection, smoking detection, area invasion, intrusion detection (supports 4 areas)
License Plate Recognition	Supported
Video	
Video Compression	H.264, H.265, MJPEG
Video Format	PS
Main Stream	Lens 1 : 60 Hz: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720, 720 × 576) Lens 2 : 60 Hz; 30 fps (3840 × 2160, 3072 × 1728, 704 × 240, 352 × 240)
Sub Stream	Lens 1 : 60 Hz: 12fps(1920 × 1080); 30 fps (1280 × 720, 704 × 480, 704 × 240, 352 × 240) Lens 2 : 60 Hz; 30 fps (1280 × 720, 704 × 240, 352 × 240)
Audio	
Audio Compression	G.711ulaw, G.711alaw, G.722.1
Audio Bit Rate	64 Kbps (G.711ulaw/G.711alaw), 16 Kbps (G.722.1)
Image	
Wide Dynamic Range (WDR)	120 dB
Image Enhancement	3D DNR, Defog, EIS
Image Format	JPEG
Screen	
Screen Type	LCD
Touchscreen	Supported
Screen Size	2.0"
Resolution	320 × 240


Storage	
RAM	2 GB
ROM	4 GB
IR	
IR Range	Up to 100 m
IR Wavelength	940 nm
Wireless Network	
Positioning Mode	GPS
Wi-Fi Frequency Band	2.412 to 2.472 GHz, 5.15 to 5.25 GHz, 5.725 to 5.875 GHz
Bluetooth	BT 4.0
Cellular Network	Available for models with '/GLE' : GSM: 850/900/1800 WCDMA: B1/B5/B8 FDD-LTE: B1/B3/B5/B7/B8/B20 TDD-LTE: B38/B40/B41
Wi-Fi Protocol	802.11 a/b/g/n/ac
Network	
Protocol	HTTPS, RTSP, NTP, FTP
API	ONVIF (PROFILE S, PROFILE G, PROFILE T), ISAPI, SDK, ISUP
Interface	
Indicator	1 status indicator: charging/power on/power off
Button	Power on/off
SIM Card	Available for models with '/GLE': 1 (Micro-SIM)
Ethernet	1 RJ45 10M/100M/1000M self-adaptive Ethernet port(s)
Aviation Plug	10-Core Aviation Plug: supporting RS-232, RJ45 and power input 9-Core Aviation Plug: supporting RS-485, LINE IN/LINE OUT , 5V output , Alarm I/O
Extended Storage	Built-in 2 memory card slots, supporting TF card, up to 256 GB for each
PTZ	
Preset	256 arming locations
Movement Range (Pan)	360° endless
Movement Range (Tilt)	-20° to 90° (Auto-flip)
Patrol Scan	8 Patrols
General	
Operating Condition	-20 °C to 60 °C (-4 °F to 140 °F). Humidity 95% or less (non-condensing)
Operating System	Linux
Storage Condition	-30 °C to 70 °C (-22 °F to 158 °F). Humidity 95% or less (non-condensing)
Light Sensor	Supported
MIC	Supported
Speaker	2 Built-in speakers, Max. power consumption: 2.5 W, Max. sound pressure level: 102 dB (10 cm)
Web Browser	Plug-in required live view: IE 10+
Weight	11.75 kg (25.9 lb.)
Power	12 VDC, 5.0 A, max. 60 W
Dimension	Kit: 500mm×395mm×257mm (19.7"×15.6"×10.1")
Installation Method	Wall-Mounted, Tripod-Mounted, Movable Bracket

Client	Hik-Connect, HikCentral Pro, HikCentral Master
Packing List	1×AC power cord 1×345 cm Composite cable 1×Lithium-ion battery 1×Mounting support plate for tripod 1×Safety rope 1×C92-screwdriver 1×500x395x257 mm portable plastic box 1×Battery Charger DS-MH1491 1×tripod DS-MH1697
Battery	
Battery Type	Lithium-ion battery, dismountable
Capacity	13400 mAh
Charging Time	≤ 4 h
Battery Life	Up to 9h in 4MP resolution ¹
Approval	
RF	CE-RED : EN 301 489-1 V2.2.3:2019; EN 301 489-3 V2.2.2:2019; EN 301 489-17 V3.2.4:2020; EN 301 489-19 V2.2.1:2022; EN 301 489-52 V1.2.1:2021; EN 55032:2015/A11:2020; EN 55035:2017/A11:2020; EN 50130-4:2011/A1:2014; EN IEC 61000-3-2:2019/A1:2021; EN 61000-3-3:2013/A2:2021; EN 300 328 V2.2.2:2019; EN 301 893 V2.1.1.1:2017; EN 301 440 V2.1.1:2017; EN 301 908-1 V15.1.1:2021; EN 301 908-2 V13.1.1:2020; EN 301 908-13 V13.2.1:2022; EN 303 413 V1.2.1:2021; EN 62479:2010; EN 50663:2017; EN 50385:2017; EN IEC 62311:2020; EN 62311:2008; EN 62368-1:2014/A11:2017
EMC	CE-EMC : EN 55032:2015/A11:2020;EN 55035:2017/A11:2020;EN 50130-4:2011/A1:2014;EN IEC 61000-3-2:2019/A1:2021;EN 61000-3-3:2013/A2:2021
Safety	CB : IEC 62368-1:2018 CE-LVD : EN 62368-1:2014/A11:2017
Environment	CE-RoHS: 2011/65/EU
Protection	IP66

▪ Available Model


iDS-MCD402-ES/36X/I/GLE(EU)


▪ Dimension

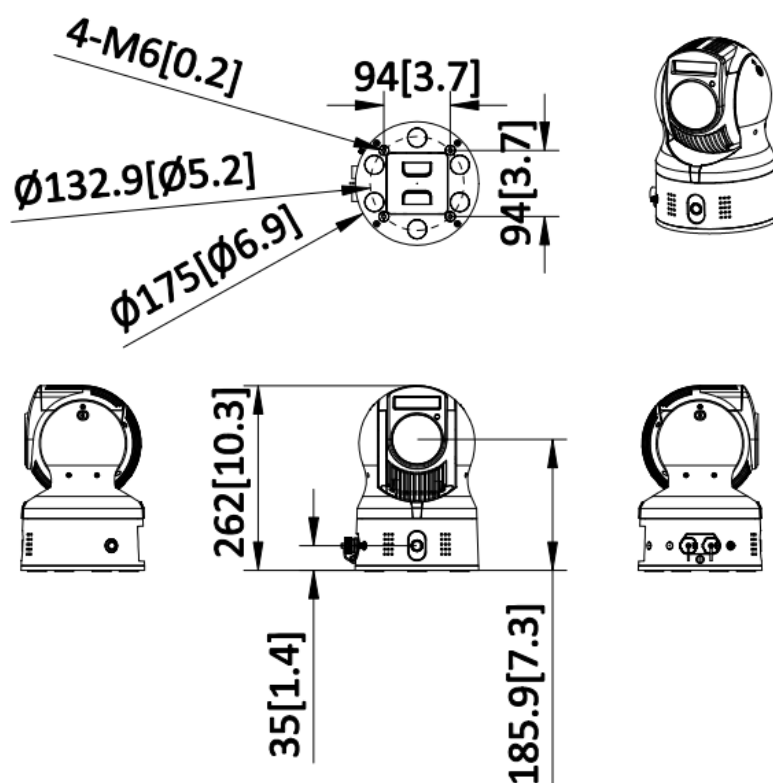


L × W × H: 175 mm × 175mm × 262 mm (6.9 × 6.9 × 10.3)

Camera Mounting Hole[mm]	Camera Mounting Hole[inch]	Unit: mm [inch]	
4-M6[0.2]	4-M6[0.2]	SCALE	1:2

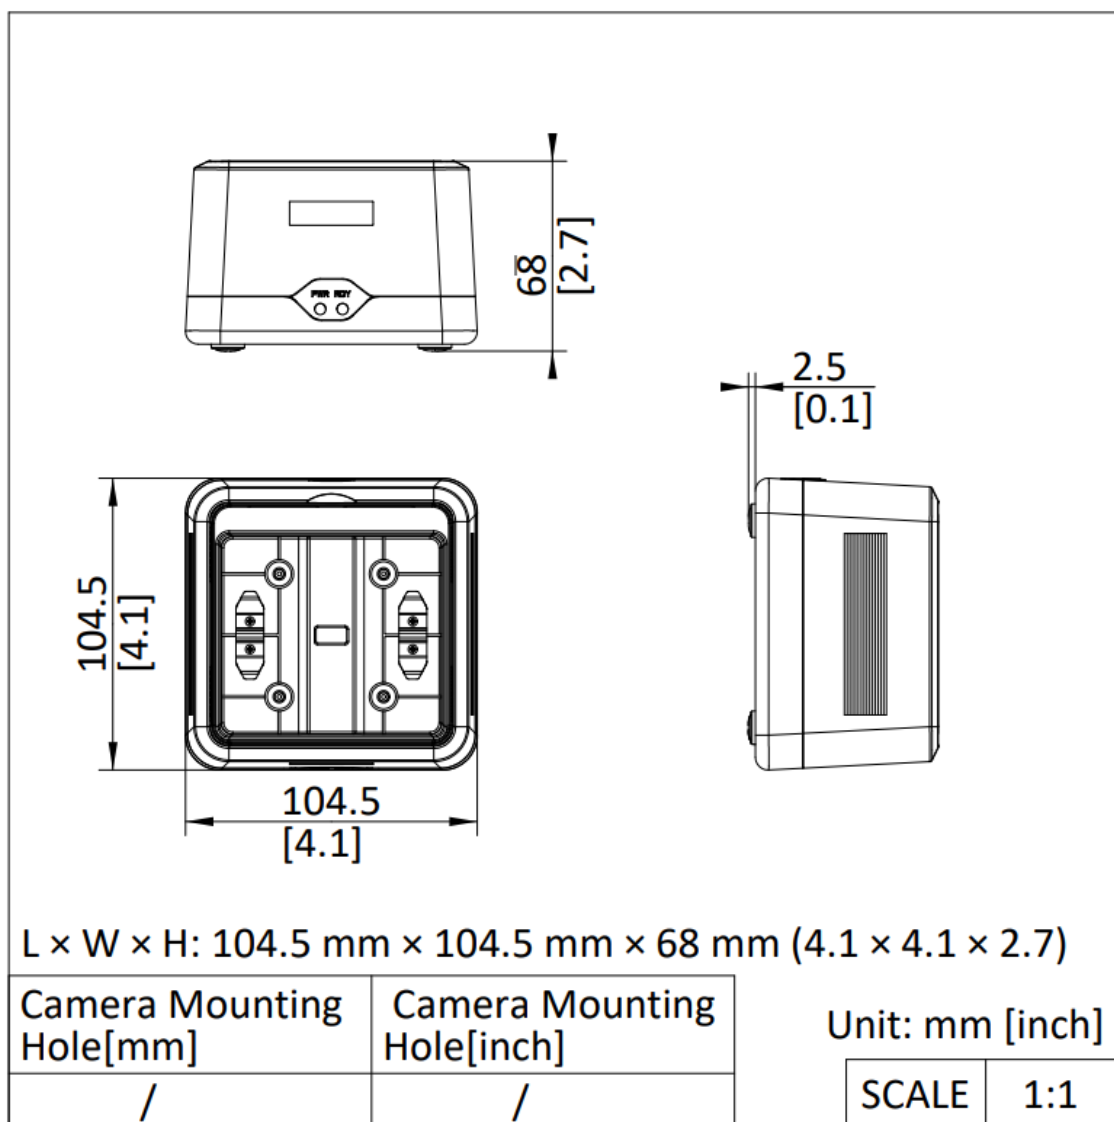

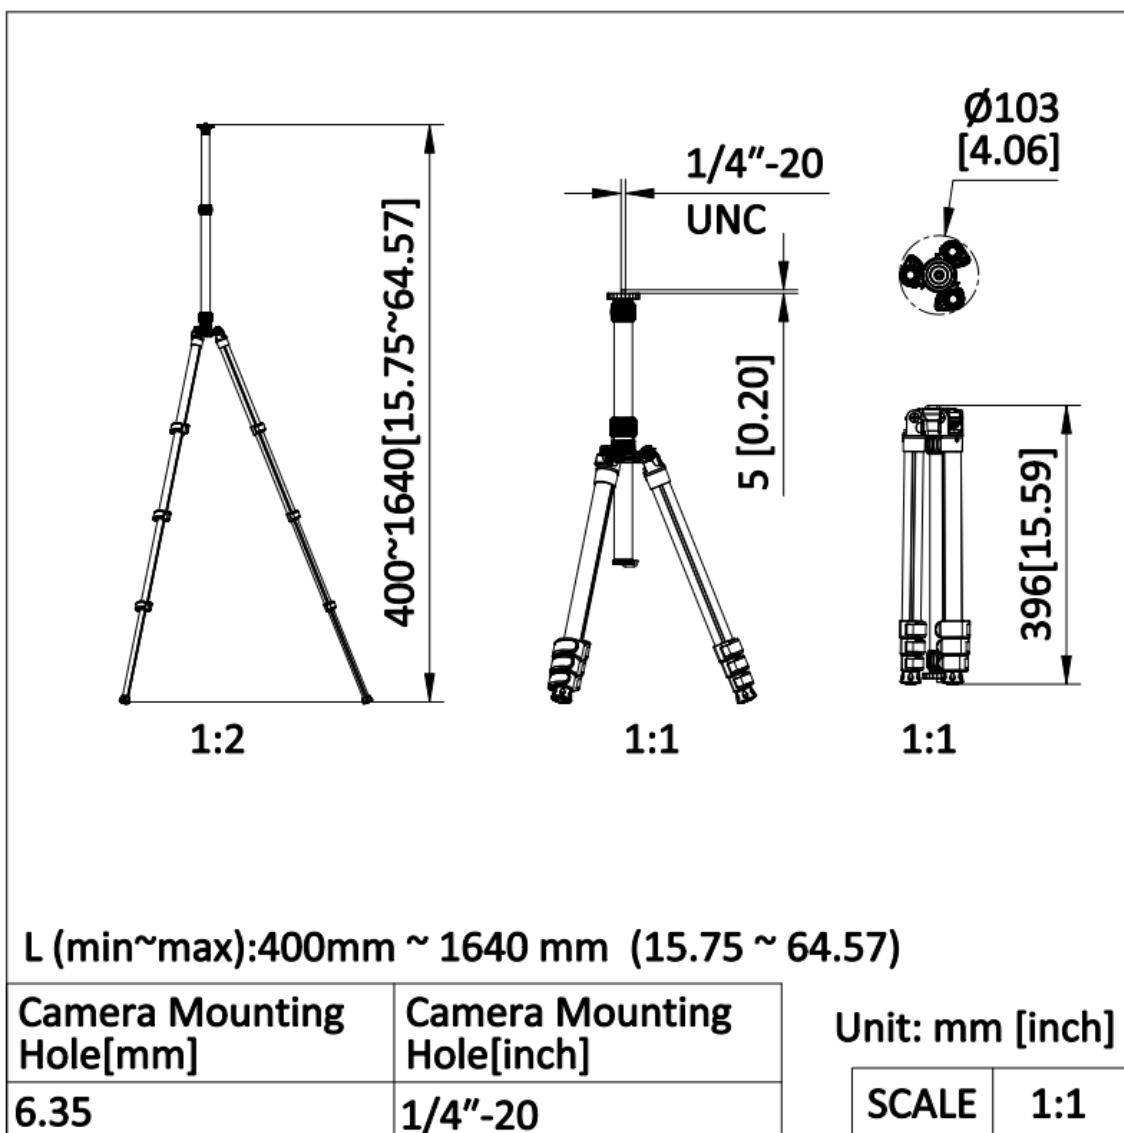

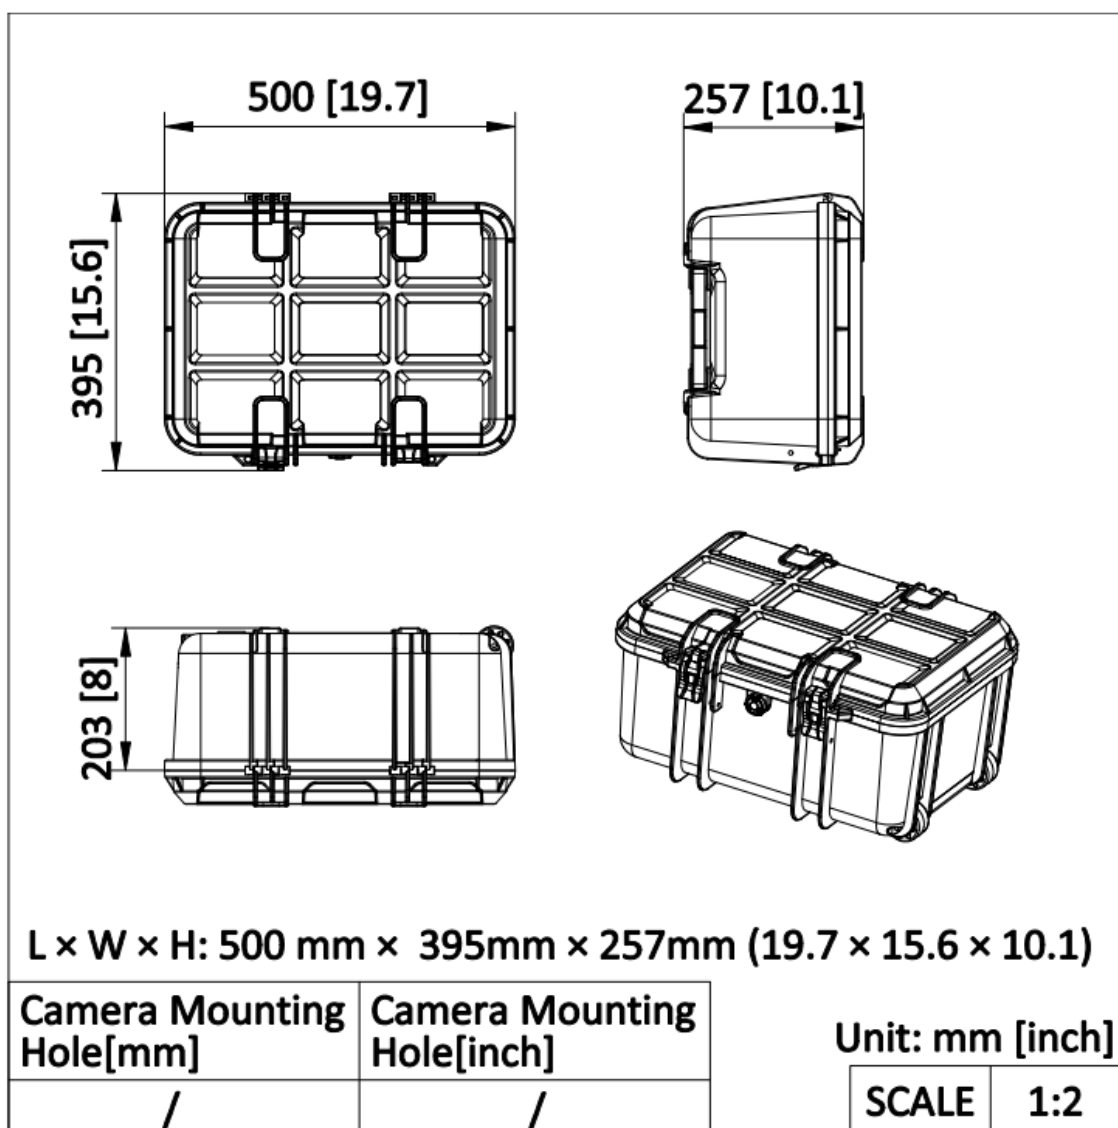

▪ Accessory

▪ Included

DS-MH1491	DS-MH1391	DS-MH1697-H
Portable PTZ	Portable PTZ	Portable PTZ
Dome Battery	Dome Battery	Dome Tripod
Charger		



▪ **Optional**

DS-MH1491 Portable PTZ Dome Battery Charger	DS-MH1695I-H Portable PTZ Dome Tripod	DS-MH1697-H Portable PTZ Dome Tripod
		

See Far, Go Further



www.hikvision.com
support@hikvision.com

