

## DS-K1105EMKB-QR Pro Card Reader



- Supports RS-485 protocol, Wiegand (W26/W34) protocol, and OSDP protocol
- Build-in M1 and EM card reading module (Frequency: 13.56 MHz&125 KHz)
- Built-in buzzer for identifying the reading status
- Supports online upgrade
- Supports multiple authentication methods such as card swiping, PIN, QR code, bluetooth, etc
- Supports touch panel for operation
- Supports occlusion detection, with bluetooth, it can realize door open via waving hands

## ▪ Specification



Interface	
RS-485	1 RS-485. Supports OSDP protocol, Baud 19200
Wiegand	Support
Authentication	
Card type	EM card,M1 card
General	
Power supply	12 VDC
Power consumption	≤6W
Working temperature	-40 ~65°C
Working humidity	0%--90%
Dimensions	139×46×21.2mm ( 5.47×1.81×0.83inch )
Installation	Wall mounting
Weight	167.7g
Buzzer	Support
Function	
Barcode recognition	Not support
QR code recognition	Support

## ▪ Available Model

DS-K1105EMKB-QR(STD)

DS-K1105EMKB-QR(NEU)

## ▪ Dimension

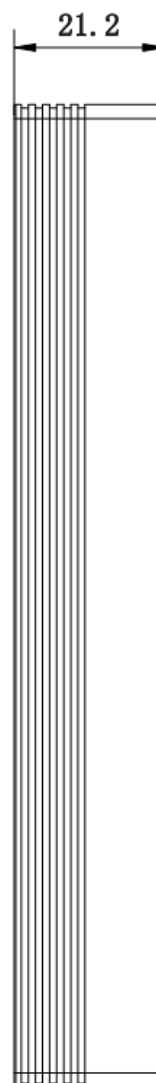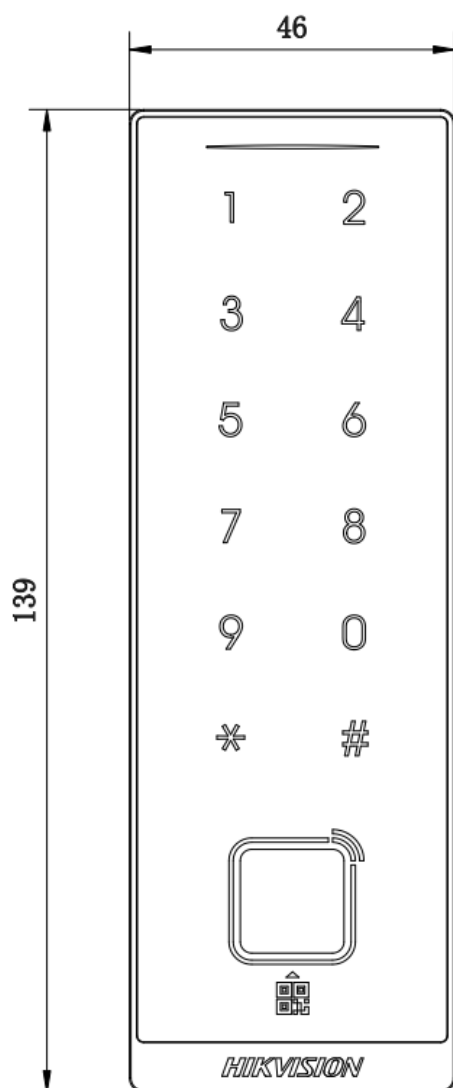

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

