

DS-K1105EDKB-QR Pro Card Reader



- Supports RS-485 protocol, Wiegand (W26/W34) protocol, and OSDP protocol
- Build-in M1 and EM card reading module (Frequency: 13.56 MHz&125 KHz)
- Supports Desfire card reading
- Built-in buzzer for identifying the reading status
- Supports online upgrade
- Supports multiple authentication methods such as card swiping, PIN, QR code, bluetooth, etc
- Supports touch panel for operation
- Supports occlusion detection, with bluetooth, it can realize door open via waving hands

▪ Specification



Interface	
RS-485	1 RS-485. Supports OSDP protocol, Baud 19200
Wiegand	Support
Authentication	
Card type	EM card,M1 card,DESfire card
General	
Power supply	12 VDC
Power consumption	≤6W
Working temperature	-40 ~65°C
Working humidity	0%--90%
Dimensions	139×46×21.2mm (5.47×1.81×0.83inch)
Installation	Wall mounting
Weight	167.7g
Buzzer	Support
Function	
Barcode recognition	Not support
QR code recognition	Support

▪ Available Model

DS-K1105EDKB-QR(STD)

DS-K1105EDKB-QR(NEU)

▪ Dimension

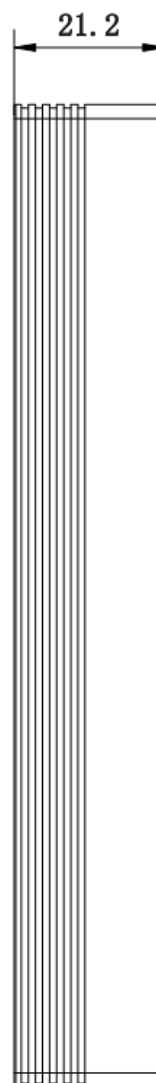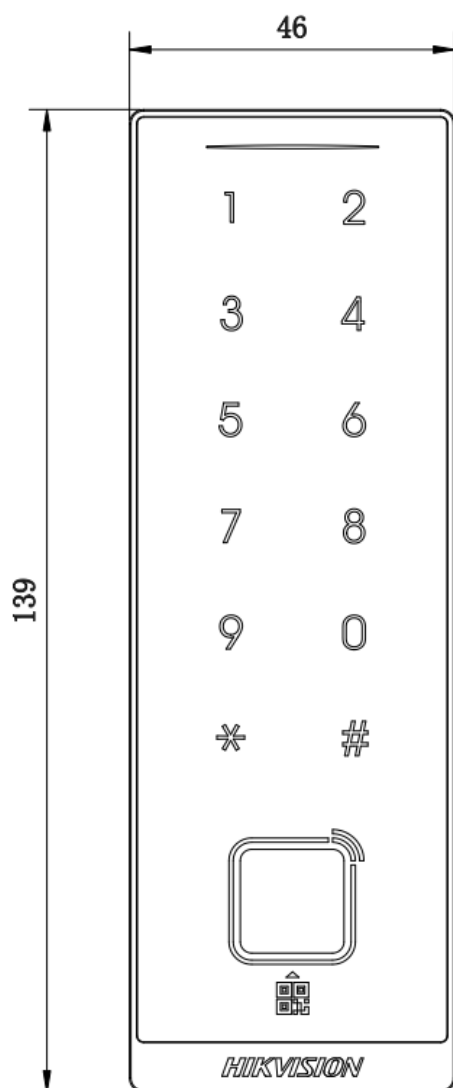

See Far, Go Further



www.hikvision.com
support@hikvision.com

