



**DS-PEA103-CK1-E1**  
**Video panic intercom panel**

- Supports quick alarm, two-way audio with the management center, and the center supports calling the front-end alarm box.
- 2MP Camera and H.264/H.265 encoding.
- Supports monitoring and broadcasting functions.
- External connection of alarm lights and sirens, and the alarm lights and sirens can be controlled independently.
- Supports device tampering alarm and noise alarm.
- Equipped with a surface mounting hanging plate to achieve surface mounting installation; supports a flush mounting hanging plate to achieve flush installation (optional).
- POE power supply.

## ▪ Specification

Hardware features	
SD card	Standard Micro SD Card Slot, Max. 256G
Tamper-Proof	Support
Video	
Fill light	Infrared Light
Resolution	1920*1080
Field angle	Horizontal: 86° Vertical: 47° Diagonal: 99°
Day/night switch mode	Auto switching
Video compression standard	H.264,H.265
Frame rate	25fps
Audio	
Audio output	1-ch 3 W Build-in Loudspeaker 1-ch 3.5 mm Audio Interface for External Audio Output
Audio input	1-ch Built-in Omnidirectional Microphone Pickup Distance: 1 m 1-ch 3.5 mm Audio Interface for External Audio Input
Audio encoding/decoding standard	G.711U/PCM/ADPCM/AAC/OPUS
Audio compression code rate	16Kbps,64Kbps
Audio quality	Smart Noise Suppression
Electrical characteristics	
Power supply	12 VDC, Standard PoE
Operation humidity	10% to 90%
Operation temperature	-25°C to 55°C
Power consumption	≤ 8W
General	
IK rate	IK08
IP rate	IP65
Installation method	Wall-mounted and Embedded-mounted
Dimension(WxHxD)	114 mm × 179mm × 41.1 mm
Application scenario	Outdoor
Shell material	Aluminium Alloy
Device management	
Alarm output	2
Alarm input	2

## ▪ Dimension

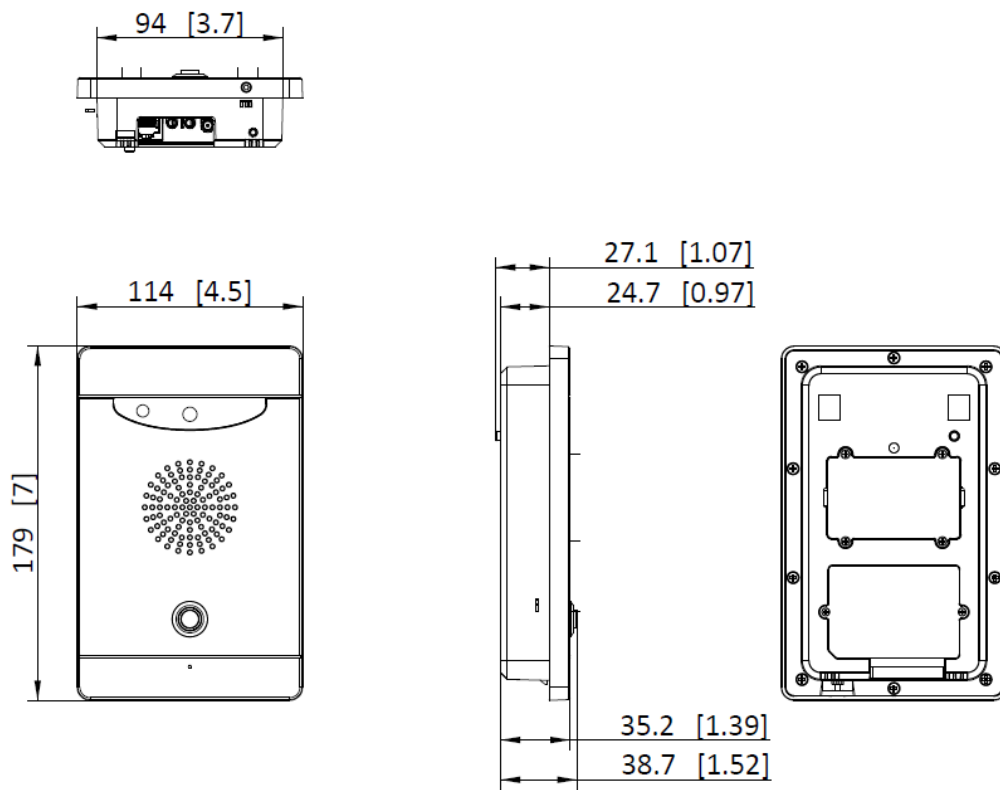

- Accessory
- Optional

DS-KABP103-F



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

