

DS-D2055RH-0A LCD Display Unit



The DS-D2055RH-0A LCD display uses an industry-level extreme-narrow bezel design, which enables a bezel width of 0.88 mm between neighboring displays. The adopted direct-lit LED backlighting technology helps achieve ultra-high and uniform brightness of 700 cd/m². The display has abundant interfaces for video inputs, such as DVI, VGA, HDMI, and DP.


- 4K signal input, auto loop up to 30 screens with HDMI interfaces
- Switching between three picture modes: Monitoring, Meeting, and Movie
- Factory calibration for color and brightness uniformity
- Direct-lit LED backlight with uniform brightness
- 1920 × 1080 resolution, 178° viewing angle
- Extreme-narrow 0.88 mm bezel design
- Anti-glare, high definition, high brightness, high color gamut, and vivid images with rich colors
- Stable and 24-hour continuous working
- Metal casing for preventing from radiation and magnetic & electric field interference
- Wall-mount and modular brackets available to meet various installation requirements

▪ Specification


Display	
Screen Size	55 inch, 139.7 cm
Active Display Area	1209.6 (H) mm × 680.4 (V) mm, 82.30 dm ²
Backlight	Direct-lit LED backlight
Pixel Pitch	0.63 mm
Physical Seam	0.88 mm
Physical Seam Tolerance	±0.8 mm
Physical Resolution	1920 × 1080
Brightness	700 cd/m ²
Color Temperature	10,000 ± 1,000K
Viewing Angle	178°(H)/178°(V)
Color Depth	8 bit, 16.7 M
Contrast Ratio	1200:1
Response Time	8 ms
Color Gamut	72% NTSC
Surface Treatment	Haze25% ,3H
Interface	
Video & Audio Input	VGA × 1, HDMI × 1, DVI × 1, DP × 1, USB × 1
Video & Audio Output	HDMI × 1
Control Interface	RS232 IN × 1, RS232 OUT × 1
Key Material	
LCD Technology	IPS
Power	
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	≤ 245 W
Standby Consumption	≤ 0.5 W
Working Environment	
Working Temperature	0°C~40°C
Working Humidity	20% RH to80% RH (without condensation)
Storage Temperature	-20°C~60°C
Storage Humidity	10% RH to90% RH (without condensation)
General	
Standby Time	600 s
Casing Material	Metal
VESA	600 mm × 400 mm
Product Dimension (W × H × D)	1210.93 mm × 681.77 mm × 69.04 mm (47.67" × 26.84" × 2.72")
Package Dimensions (W × H × D)	1308 mm × 834 mm × 221 mm (51.5 " × 32.83 " × 8.7 ")
Net Weight	23.0 ± 0.5 kg (50.7 ± 1.1 lb) for single display
Gross Weight	28.2 ± 0.5 kg (62.2 ± 1.1 lb) for carton with a single display
Packing List	Carton with a single display: LCD display × 1, power cable × 1, network cable × 1, 2-meter HDMI cable × 1, screw × 4, remote control × 1, IR receiver × 1, quick start guide (multilingual) × 1, quick start guide (English) × 1, LCD Maintenance Notice × 1

▪ Physical Interface

Interface	Description	Interface	Description
POWER	Power indicator	DVI IN	DVI-I input interface for digital signals
LINE OUT	Audio output interface for analog signals	RS 232 OUT	Serial loopback output interface
HDMI OUT	HDMI output interface for digital signals	RS 232 IN	Serial input interface
HDMI IN	HDMI input interface for digital signals	USB	USB interface
DP IN	DP input interface for digital signals	LAN	Reserved interface
VGA IN	VGA input interface for analog signals	IR IN	IR input interface
AC~ IN	Power input	SWITCH	Switch button

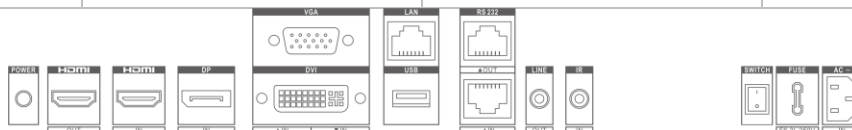

▪ Dimension

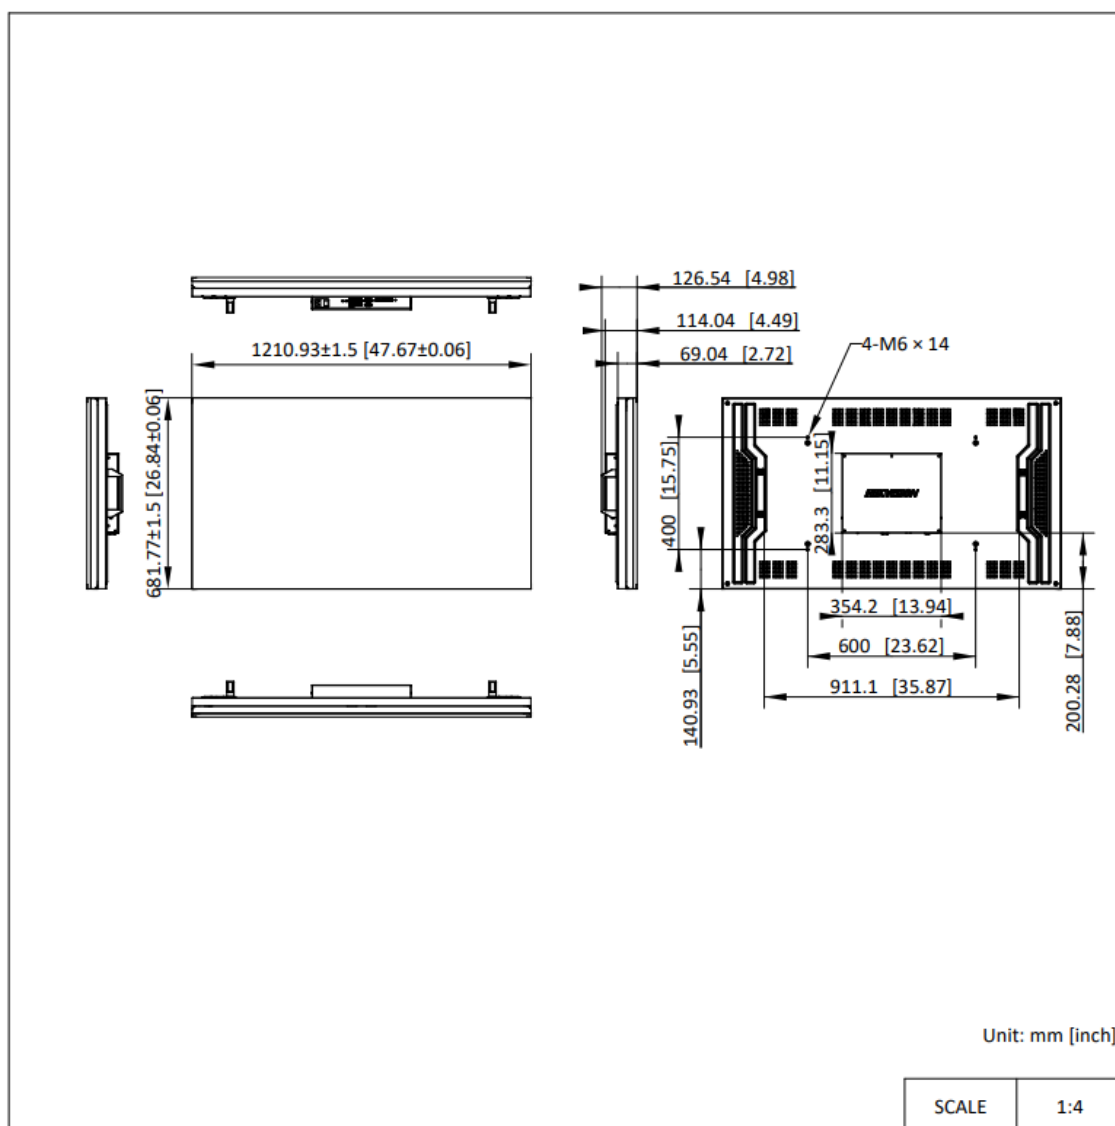

▪ Accessory

▪ Optional

DP-D2X55R70-1X1-Q1-MF-Q0.8-ZY	DP-D2X55R70-0X0-Q0-MB-Q1-ZY/H800	DP-D2X55XXX-1X1-Q1-SW-Q0.8-TY	DP-D2X4655-1X1-Q1-NW-Q0.8-ZF

See Far, Go Further



www.hikvision.com
support@hikvision.com

