

DS-D4015CS-2F**DS-D4015CS-2F, 1.538mm, 640*480MM**


- High refresh rate and Ultra-high contrast ratio, more delicate and smooth video, and more realistically image with excellent color performance
- 4:3 ratio cabinet, best choice for high cost performance
- Highly integrated and compatible cabinet with simple and lightweight design
- Cable-free design and Ultra-thin backshell for easier installation, easier to level the lamp boards, and make the splicing more flat
- Modular structure design, support module, power supply, receiver card front maintenance

▪ Specification

| Product Model | |
|--------------------------------|--|
| Product Model | DS-D4015CS-2F |
| Product Type | |
| Product Type | Indoor small pitch full color LED |
| Cabinet | |
| Pixel Configuration | SMD Triad LED |
| Pixel Pitch Category | P1.5 |
| Pixel Pitch | 1.538 mm |
| Pixel Density | 422500 dots/m ² |
| Modules Component | 2 × 3 |
| Resolution | 416 × 312 |
| Dimensions (W × H × D) | 640 (W) mm × 480 (H) mm × 36 (D) mm (25.197" × 1.898" × 1.42") |
| Area | 0.3072 m ² |
| Weight | 6 kg (13.23 lb.) |
| Cabinet Material | Die cast aluminum |
| Maintenance Method | Complete front maintenance |
| Module | |
| Dimensions | 320×160 mm |
| Module Resolution | 208 × 104 |
| Display | |
| White Balance Brightness | 600 cd/m ² |
| Color Temperature | 3000-10000 K adjustable |
| Viewing Angle | 160°(H)/160°(V) |
| Contrast Ratio | 5000:1 |
| Color Uniformity | ≤ ± 0.003Cx , Cy |
| Brightness Uniformity | ≥ 97% |
| Processing Performance | |
| Driving Method | Constant current driving |
| Frame Frequency | 60 Hz |
| Refresh Rate | 3840 Hz |
| Grey Level | Up to 16 bit |
| Power | |
| Max. Consumption | ≤450W/m ² |
| Average Consumption | ≤150W/m ² |
| Input Voltage | 100~240 VAC ± 10 % |
| Working Environment | |
| Working Temperature | -10 °C to 40 °C (14 °F to 104 °F) |
| Working Humidity | 10% to 60% RH (without condensation) |
| Storage Temperature | -20 °C to 60 °C (-4 °F to 140 °F) |
| Storage Humidity | 10% to 85% RH (without condensation) |
| General | |
| Package Dimensions (W × H × D) | 758 (W) mm × 606 (H) mm × 442 (D) mm (29.843 " × 23.858 " × 17.402 ") |

| | |
|-----------------|---|
| Packing List | Regulatory Compliance and Safety Information × 1 Several Joint pieces, Fixing screws and Signal cables Several LED lamp beads and IC components |
| Gross Weight | 7 kg (15.4 lb.) |
| Net Weight | 6 kg (13.23 lb.) |
| Bracket | |
| Modular Bracket | DP-D40XXCA23-1X1-Q0.3-NW-Q0.3-HC 1*1; DP-D40XXCA23-2X2-Q1-NW-Q1-HC 2*2 |

▪ **Dimension**

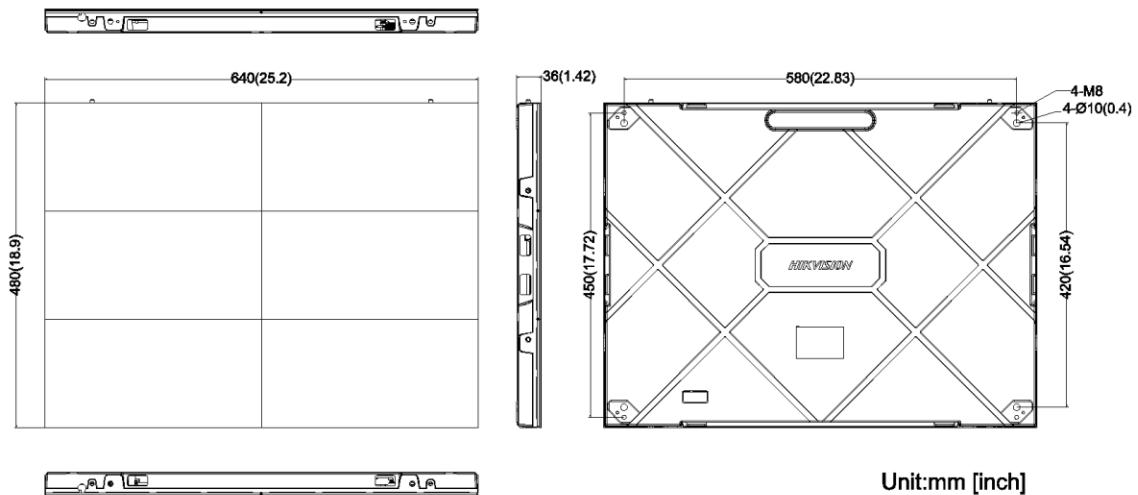

▪ **Accessory**

▪ **Optional**

| DS-D40S-1F/S | DS-D40S-2F | DS-D40W-2F/PC | DS-1NP6UEC0 | DS-D40S-2F/H |
|--------------|------------|---------------|-------------|--------------|
| | | | | |

See Far, Go Further



www.hikvision.com
support@hikvision.com

