

DS-3WR4G3N-O(海外标配)/英标
Outdoor 4G LTE N300 Wi-Fi Router



- 4G LTE N300 Wi-Fi Router
- IP55 Weather Proof
- Instantly Access a Mobile Network with a SIM Card
- Wi-Fi Rate up to 300Mbps

▪ Specification


Model		DS-3WR4G3N-O(海外标配)/英标
General	Product Dimension (W × H × D)	90 mm x 57mm x 172 mm(including antennas)
	Package Dimension (W × H × D)	105mm*100mm*192mm
	Net Weight	0.773kg
	Packing List	Wireless Router × 1 Power Adapter × 1 Quick Start Guide × 1 Regulatory Compliance and Safety Information × 1 RJ45 Ethernet Cable × 1 Metal Clamp × 1
	Packing Method	Single pack
	Working Temperature	-30 °C to 60 °C
	Working Humidity	5% to 95% RH non-condensing
	Storage Temperature	-30 °C to 70 °C (-40 °F to 158 °F)
	Storage Humidity	5% to 95% RH non-condensing
	Installation Mode	Wall-Mounted,Pole
	Gross Weight	0.973 kg
	IP Rating	IP55
Wireless Parameter	Data Rate	≤ 300 Mbps 2.4 GHz: Up to 286Mbps
	Wireless Standard	IEEE802.11/b/g/n
	Working Frequency Band	2.4 GHz
	Transmitting Power	11b: ≥20±1.5dBm@11Mbps 11g: ≥20dBm±1.5dBm@54Mbps 11n: ≥20dBm±1.5dBm@MCS7
	Wireless Performance	802.11b/g/n 300Mbps MIMO technology
	Receiving Sensitivity	11b: ≤-90±1.5dBm @1Mbps , ≤-84±1.5dBm @11Mbps 11g: ≤-86±1.5dBm @6Mbps , ≤-69±1.5dBm @54Mbps 11n 20MHz: ≤-85±1.5dBm @MCS0 ,

		$\leq -67 \pm 1.5 \text{ dBm @ MCS7}$ 11n 40MHz: $\leq -82 \pm 1.5 \text{ dBm @ MCS0}$, $\leq -64 \pm 1.5 \text{ dBm @ MCS7}$
	Antenna	Built-in 2.4G 2dBi FPC antenna*2 Built-in 4G LTE 3dBi steel antenna*2
	Max. Connections	16
	Recommended Connections	8
Hardware Parameter	Network Interface	POE/LAN1 Transfer*1 10/100Mbps adaptive network port LAN2*1 10/100Mbps adaptive network port
	LED Indicator	PWR、LAN 、WiFi、WAN/LAN、4G/3G
	Power Supply Method	Power Supply Adapter; POE Power Supply
	Power Specifications	DC12V 1A/PoE 24V 0.5A
	RAM	8 MB DDR3
	ROM	2 MB NOR
Software Function	Application function	4G access, routing mode, AP mode
	Security Mode	WPA/WPA2-PSK supported
	Management Method	Web
	System Log	Syslog
	Upgrade	Local upgrades
	DHCP	DHCP Server/Client
	IPv4	IPv4
	WAN Mode	Static IP,DHCP
Hardware Specifications	Reset Button	Hardware Resetting Button
4G Parameter	4G Category	LTE CAT.4
	4G Standard	LTE FDD/TDD
	4G Mobile Bands	FDD LTE:B1/B3/B5/B7/B8/B20/B28 TDD LTE: B38/ B40/B41
	Transmission Rate	LTE FDD: Up 150Mbps(DL)/Up 50Mbps(UL) LTE TDD: Up 130Mbps(DL)/Up 30Mbps(UL)
	Receiver Sensitivity	FDD B1: -97.6dBm FDD B3: -97dBm FDD B5: -98.8dBm FDD B7: -96dBm FDD B8: -98dBm TDD B38: -97dBm TDD B40: -97dBm TDD B41: -97dBm

▪ Available Model

DS-3WR4G3N-O/英标

▪ Dimension

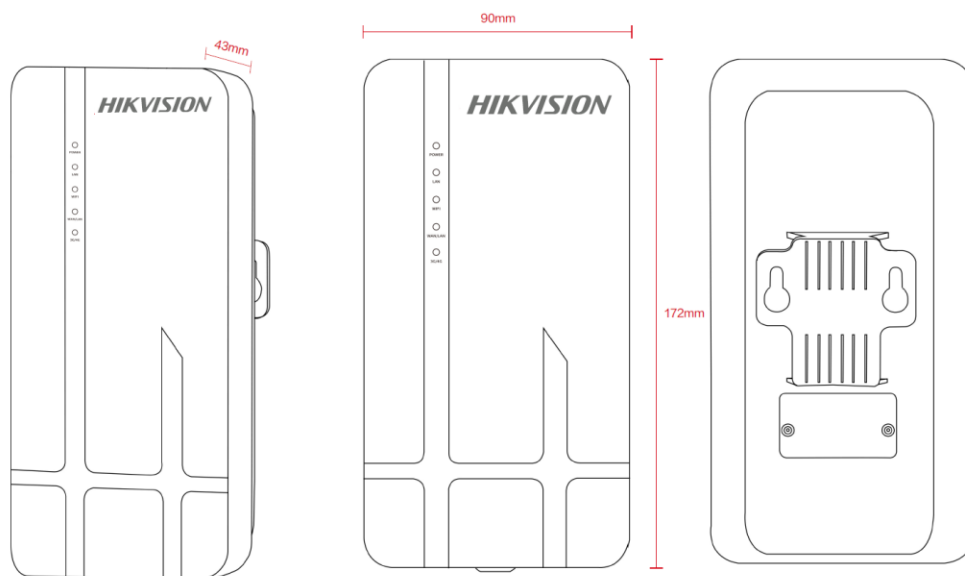

See Far, Go Further



www.hikvision.com
support@hikvision.com

