

DS-D6055UT-D/S 55-inch Touchable Slim Floor Standing Digital Signage



- 10-point capacitive touch, suitable for installing self ordering or navigation applications, facilitating self-service operation.
- Metal shell appearance, slim frame, and all-in-one design, suitable for advertising display at store entrances.
- Exquisite image, industrial A+ panel, auto-coloring and image-enhancing engine.
- Frosted glass, anti-glare, clearer images, and wider viewing angles.
- Variable materials, static and dynamic materials, including pictures, audio, video, scrolling subtitle, PDF, webpages, live video, number calling, pop-up pictures, etc.
- Flexible program schedule, free schedules and district play of multiple materials and variable play modes: play by day, play by week, play by loop, custom play, etc.
- Centralized management, remotely control and manage one screen or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview, remotely release programs and updates local (USB) programs.
- Organization permission, 5-level organization is available for managing materials, programs, terminals, and users, and support creating custom users, allocating permission for users according to user level, and permission templates.
- Multiple security safeguards, 3-level check of materials, programs and schedules to prevent mistake release, encryption of data in storage and transmission to prevent data tampering, and with no default password, users can activate and set initial password to guarantee the password safety.


▪ Specification

| Product Model | |
|-----------------------------|--|
| Product Model | DS-D6055UT-D/S |
| Display | |
| Screen Size | 55 inch |
| Resolution | 2160 × 3840 |
| Active Display Area | 1209.6 (H) × 680.4 (V) mm |
| Pixel Pitch | 0.315 (H) mm × 0.315 (V) mm |
| Backlight | E-LED |
| Viewing Angle | 178°(H)/178°(V) |
| Contrast Ratio | 1200:1 |
| Brightness | 500 cd/m ² |
| Color Depth | 10 bit (8 bit + FRC) |
| Response Time | 8 ms |
| Color Gamut | 72% NTSC |
| Reliability | 7 × 24h |
| Refresh Rate | 60 Hz |
| Haze | 25% |
| Display Ratio | 9 : 16 |
| Panel Type | IPS |
| Touch | |
| Touch Type | Capacitive Touch (G+G) |
| Touch Point | 10 |
| Touch Response Time | < 25 ms |
| Touch Precision | ± 2 mm |
| Built-in System | |
| Operation System | Android 13 |
| Processor | Cortex-A55, 4-core, main frequency 1.92 GHz |
| Memory | 4 GB |
| Built-in Storage | 32 GB EMMC |
| Interface | |
| Video & Audio Input | HDMI 2.0 (HDCP 2.2) × 1 |
| Video & Audio Output | Speaker (8Ω 5 W) × 2 |
| Network Interface | RJ45 × 1, Wi-Fi (2.4G/5G, 802.11 a/b/g/n/ac/ax) × 1, RS232 in × 1, RS232 out × 1 |
| Data Transmission Interface | USB 2.0 × 1, USB 3.0 × 1, BT 5.4 × 1 |
| Power | |
| Input Voltage | 100 to 240 VAC, 50/60 Hz |
| Standby Consumption | ≤ 0.5 W |
| Power Consumption | 108 W (typ), 155 W (max) |
| Working Environment | |
| Working Temperature | 0 °C to 40 °C (32 °F to 104 °F) |
| Working Humidity | 10% to 80% RH (Condensation) |
| Storage Temperature | -20 °C to 60 °C (-4 °F to 140 °F) |
| Storage Humidity | 10% to 90% RH (Condensation) |

| General | |
|--------------------------------|---|
| Mounting Type | Floor standing |
| Product Dimensions (W × H × D) | 740 (W) mm × 1886 (H) mm × 480 (D) mm (With Stand) |
| | 727 (W) mm × 1776 (H) mm × 63.8 (D) mm (Without Stand) |
| Package Dimensions (W × H × D) | 840 (W) mm × 1895 (H) mm × 155 (D) mm |
| Net Weight | 46.5 kg |
| Gross Weight | 52 kg |
| Packing List | Digital signage × 1, stand × 1, power cord × 1, user manual × 1, quick start guide × 1, Regulation Compliance and Safety Information × 1, stand fixed with M8 screw × 6, key × 2, foot pad × 4, energy efficiency label × 1, caster wheel × 4, wheel fixed with M4 screw × 16, Base fixed bracket × 2 , Base fixed bracket with M4 screw × 4, Expansion screw × 2 |
| Display | |
| Color Temperature | 10000K |
| Built-in System | |
| Video Format | AV1, H.265, H.264/AVC, MVC, VP9, AVS2, MPEG4, MPEG2, MPEG1, VP8, MJPEG, H263 |
| Audio Format | MPEG, APE, FLAC, AAC, OGG, AIF, AIFF, ALAW, ALAC |

▪ Physical Interface


| Interface | Description | Interface | Description |
|-----------|-------------------------------|-----------|-------------------------------------|
| LAN | 100M/1000M Ethernet interface | HDMI 1 | HDMI digital signal input interface |
| RS232 OUT | RS232 control out | RS232 IN | RS232 control in |
| USB3.0 | USB 3.0 interface | USB3.2 | USB 2.0 interface |

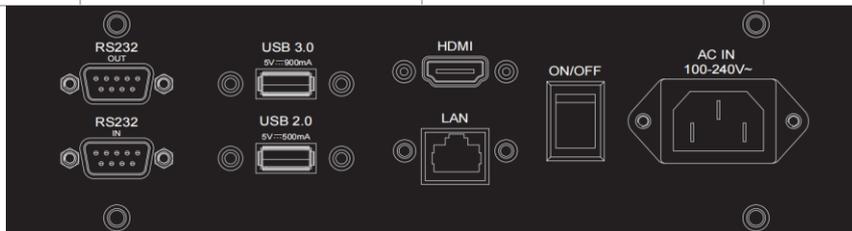

▪ Available Model

DS-D6055UT-D/S

▪ Dimension

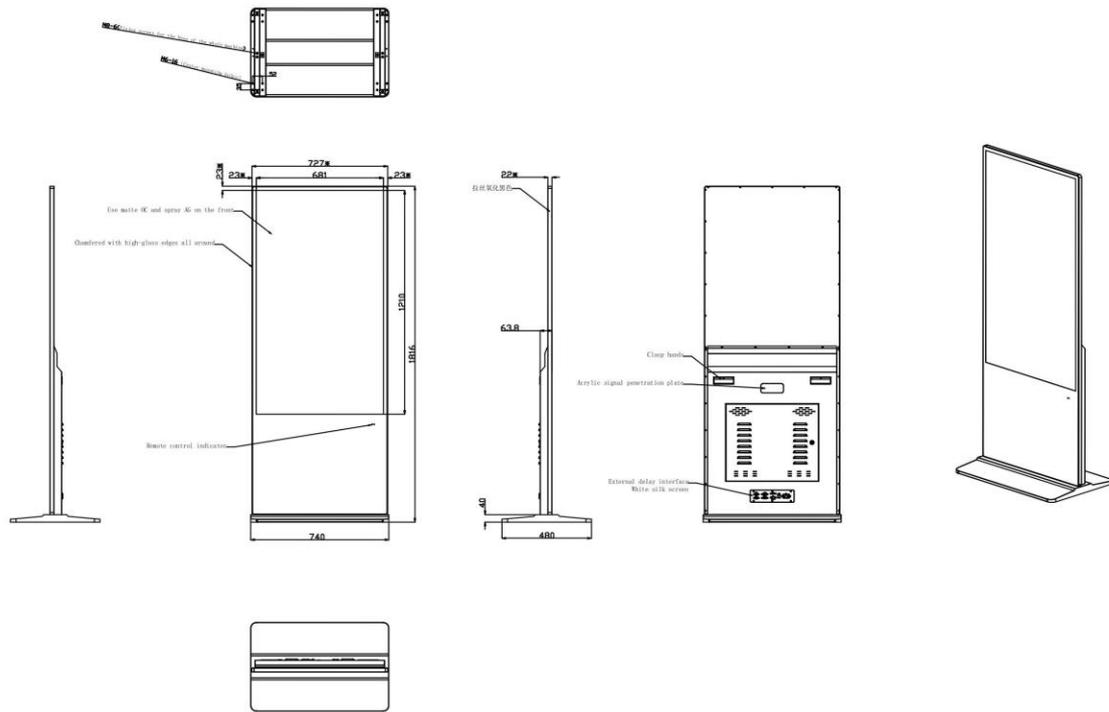

See Far, Go Further



www.hikvision.com
support@hikvision.com

