

DS-1M6AUA CAT 6A RJ45 Plug

Key Feature


- 15u inch gold plated contacts.
- Support 10G Base-T Ethernet.
- Compliant With ROHS Standard.
- 8 pins × 8 conductors.



Specification

Model	DS-1M6AUA
Max Current	1.5 A @25°C
Max Voltage	≤ 150 VAC
Insulation Resistance	≥ 1000 MΩ @100V DC
Withstand voltage	1 KV AC RMS
Contact Resistance	≤ 20 mΩ
Tensile Strength	50 N for 60 ± 5 s
Insert/Extraction life	≥ 750 cycles
Operating temperature	-25 ~ 55 °C
Storage temperature	-10 ~ 40 °C
Relative humidity	< 80 %
Plug Housing	Polycarbonate, UL94V-2
Compatible Insulated Conductor Diameter	1.09 ~ 1.19 mm
Quantity	100 pcs / bottle
Weight	0.193 kg / bottle
Package	Bottle : 12.5 cm * 6.7 cm * 5.5 cm

Dimension

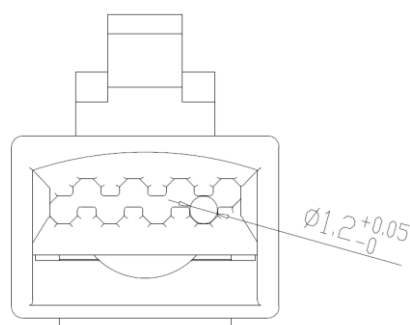

Available Model

DS-1M6AUA (O-STD)/100

See Far, Go Further



www.hikvision.com
support@hikvision.com

