


**DS-1PTS72LCAL | DS-1PTS72LCUL | DS-1PTS72SCAL | DS-1PTS72SCUL**  
**Fiber Optic Pigtail, Singlemode**

## Key Feature

- Excellent performance and durability in harsh field environments.
- LSZH, environmentally friendly and safer to use.
- G.657A2.
- Compliant with RoHS 2.0.

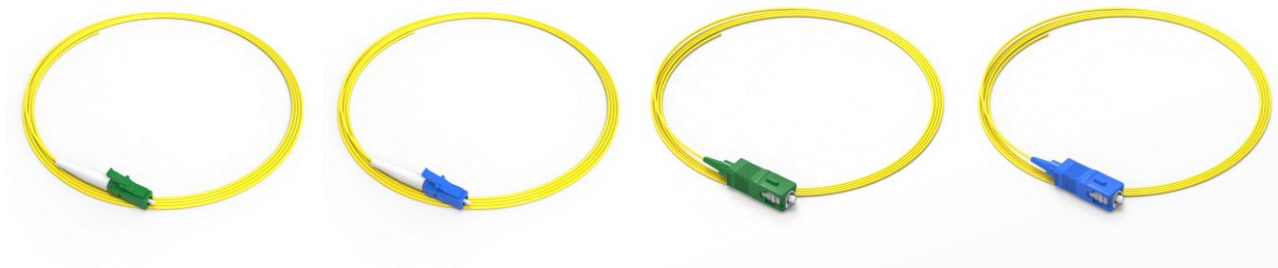

## Specification

| Product Type                         | Fiber Optic Pigtail, Singlemode |                                      |                   |                  |                  |
|--------------------------------------|---------------------------------|--------------------------------------|-------------------|------------------|------------------|
| General Specifications               | Model                           | DS-1PTS72LCAL                        | DS-1PTS72LCUL     | DS-1PTS72SCAL    | DS-1PTS72SCUL    |
|                                      | Interface                       | LC/APC                               | LC/UPC            | SC/APC           | SC/UPC           |
|                                      | Body Style                      | Simplex                              | Simplex           | Simplex          | Simplex          |
|                                      | Connector Color                 | Green                                | Blue              | Green            | Blue             |
|                                      | Jacket Color                    | Yellow                               | Yellow            | Yellow           | Yellow           |
|                                      | Standard                        | IEC 61754-20-2002                    | IEC 61754-20-2002 | IEC 61754-4-2002 | IEC 61754-4-2002 |
| Optical Specifications               | Fiber Mode                      | Singlemode                           | Singlemode        | Singlemode       | Singlemode       |
|                                      | Fiber Type                      | G657A2                               | G657A2            | G657A2           | G657A2           |
|                                      | Insertion Loss, maximum         | 0.2 dB                               | 0.20 dB           | 0.20 dB          | 0.20 dB          |
|                                      | Return Loss, minimum            | 60 dB                                | 50 dB             | 60 dB            | 50 dB            |
| Dimensions                           | Length                          | 1 m                                  |                   |                  |                  |
| Mechanical Specifications            | Bending Radius                  | 20D (Dynamic), 10D (Static)          |                   |                  |                  |
|                                      | Durability                      | > 500 times                          |                   |                  |                  |
| Environmental Specifications         | Operating Temperature           | -40 °C to +70 °C (-40 °F to +158 °F) |                   |                  |                  |
| Packaging and Weight                 | Packaging Quantity              | 1                                    |                   |                  |                  |
|                                      | Packaging Type                  | Bag                                  |                   |                  |                  |
| Regulatory Compliance/Certifications | ROHS 2.0                        | Compliant                            |                   |                  |                  |

## Available Model

DS-1PTS72LCAL (O-STD)

DS-1PTS72LCUL (O-STD)

DS-1PTS72SCAL (O-STD)

DS-1PTS72SCUL (O-STD)

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

