


DS-1FCDM3LCUL | DS-1FCDM4LCUL
Fiber Optic Patch Cord, Multimode

Key Feature

- Excellent performance and durability in harsh field environments.
- LSZH Jacket, environmentally friendly and safer to use.
- OM3 or OM4.
- Compliant with RoHS 2.0.

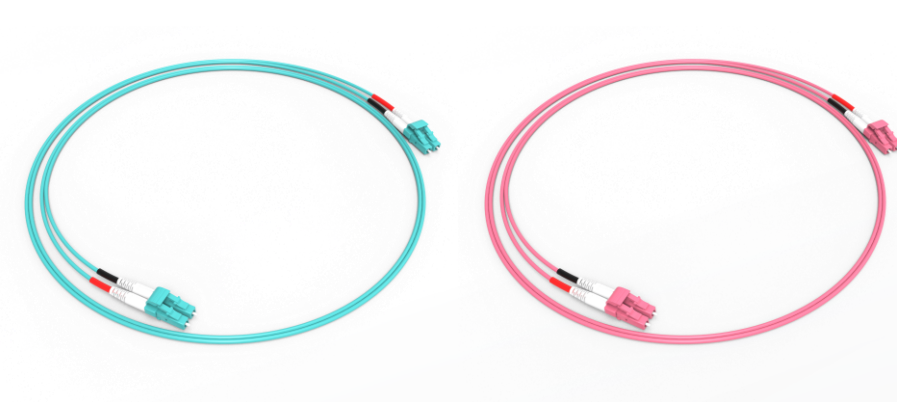

Specification

Product Type	Fiber patch cord, Multimode		
General Specifications	Model	DS-1FCDM3LCUL	DS-1FCDM4LCUL
	Interface, connector	LC/UPC	LC/UPC
	Body Style	Duplex	Duplex
	Connector Color	Aqua	Violet
	Jacket Color	Aqua	Violet
	Jacket Material	LSZH	LSZH
	Standard	IEC 61754-20-2002	IEC 61754-20-2002
Optical Specifications	Fiber Mode	Multimode	Multimode
	Fiber Type	OM3	OM4
	Insertion Loss, maximum	0.2 dB	0.2 dB
	Return Loss, minimum	25 dB	25 dB
Dimensions	Length	3 m	
	Diameter Over Jacket	2.0 mm	
Mechanical Specifications	Bending Radius	20D(Dynamic), 10D mm(Static)	
	Durability	> 500 times	
Environmental Specifications	Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)	
Packaging and Weight	Packaging Quantity	1	
	Packaging Type	Bag	
Regulatory Compliance/Certifications	RoHS 2.0	Compliant	

Available Model

DS-1FCDM3LCUL(O-STD)

DS-1FCDM4LCUL(O-STD)

See Far, Go Further



www.hikvision.com
support@hikvision.com

