

DS-IVMS9530ES-UH04/I1P2

DS-IVMS9530ES-UH04/I1P2



- Supports 1x HDMI and 4x DP1.4 outputs
- Supports 8K×4K seamless fusion output
- EDID lock support to prevent display misalignment when connecting external screens
- Custom resolution support with a maximum width and height up to 8192 pixels
- Front-facing bays for three 3.5-inch hard drives, compatible with U.2/U.3 and SATA protocols
- UDP and TCP protocol control support, with open API interfaces
- Program scheduling via windowed layout mode
- Supports slicing, virtual screens, and image rotation, ideal for irregular screen configurations
- Compatible with H.264, H.265, and HAP video codecs
- Supports decoding of jpg, jpeg, bmp, png, gif, and image sequence frames
- Supports HDR video playback and SDR-to-HDR simulation effects



▪ Specification

Product Model	
Product Model	DS-IVMS9530ES-UH04/I1P2
Chassis	
Chassis Height	4U
Interface	
USB Interface	6 × USB 3.0
Power	
Device Power Consumption	650 W
Network	
Network Interface	1GB RJ45×2
General	
Working Temperature	5°C to 35°C (40°F to 95°F)
Working Humidity	5%-95%
Dimensions (W × H × D)	482mm(w)*178mm(H)*580mm(D)
Gross Weight	19.05Kg
Video Output	
Max. Video Output Resolution	Width 8192, Height 8192, Total 35.4MP
Video Output Interfaces	DP1.4 × 4, HDMI2.0 × 1
System	
CPU	Intel® Xeon® W-1390P, 8 cores, 16 threads, turbo boost up to 5.3GHz
CPU Dominant Frequency	3.5GHz
Video Card	Intel UHD P750 (for monitor connection) , NVIDIA RTX 2000 Ada 16GB (for screen connection)
Video Memory	32GB DDR4 (2×16GB)
Storage Capacity	1TB M.2 NVme SSD Gen3
GPU Decoding Performance	5.3GHz
Operating System Supported	Windows 11 Professional (English version)
Device Parameters	
Serial Interface	1 × RS-232 port
KVM Seat	
Graphics Card Expansion	Intel UHD P750 (for monitor connection) NVIDIA RTX 2000 Ada 16GB (for display connection)

▪ Available Model

DS-IVMS9530ES-UH04/I1P2

▪ Dimension

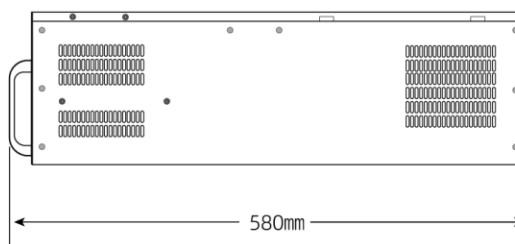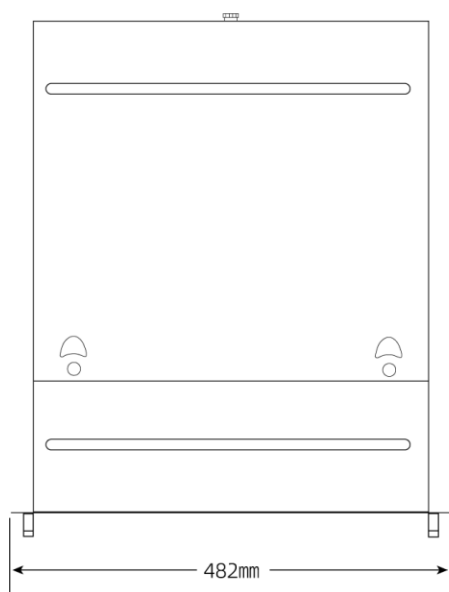

See Far, Go Further



www.hikvision.com
support@hikvision.com

