

DS-6704HUHI(B) **4-ch 5 MP H.265 DVS**




- Four analog cameras can be connected
- Encoding ability up to 5 MP @ 12 fps
- Four types of signal input adaptively, including HDTVI AHD CVI and CVBS
- Supports Micro SD card, up to 128 GB capacity
- Efficient H.265+ compression technology

▪ Specification

Video and Audio	
Analog Video Input	4-ch, BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDTVI Input	5 MP(2560 × 1944)@20 fps, 5 MP(2560 × 1944)@12 fps, 4 MP(2560 × 1440)@25/30 fps, 3MP@18 fps, 1080p30, 1080p25, 720p30, 720p25
AHD Input	1080p30, 1080p25, 720p30, 720p25
HDCVI Input	1080p30, 1080p25, 720p30, 720p25
CVBS Input	PAL/NTSC
Audio Input	4-ch, green-pin interfaces (2.0 Vp-p, 1 KΩ)
Audio Output	1-ch, 3.5mm interface (Linear, 1 KΩ)
Two-Way Audio	1-ch, 3.5mm interface (2.0 Vp-p, 1 KΩ)
Synchronous Playback	4-ch
Recording	
Video Compression	H.264/Smart264/H.265/Smart265
Encoding Resolution	5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF
Frame Rate	Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
Video Bitrate	32 Kbps to 10 Mbps
Dual-stream	Support main stream or sub stream
Audio Compression	G.711u
Audio Bitrate	64 Kbps
Network	
Network Protocol	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS, ONVIF profile S
Network Interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface
Auxiliary Interface	
SD Card	1 Micro SD card slot, support Micro SD card (Hot-swapping is not supported)
Capacity	16GB Up to 128 GB
Serial Interface	RS-485 (half-duplex); RS-232
Alarm In/Out	4/2
General	
Power Supply	12 VDC, 2 A
Consumption	≤ 24W
Working Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	114 × 130 × 48 mm (4.5 × 5.1 × 1.9 inch)
Weight	≤ 1.0 kg (2.2 lb)

▪ Physical Interface

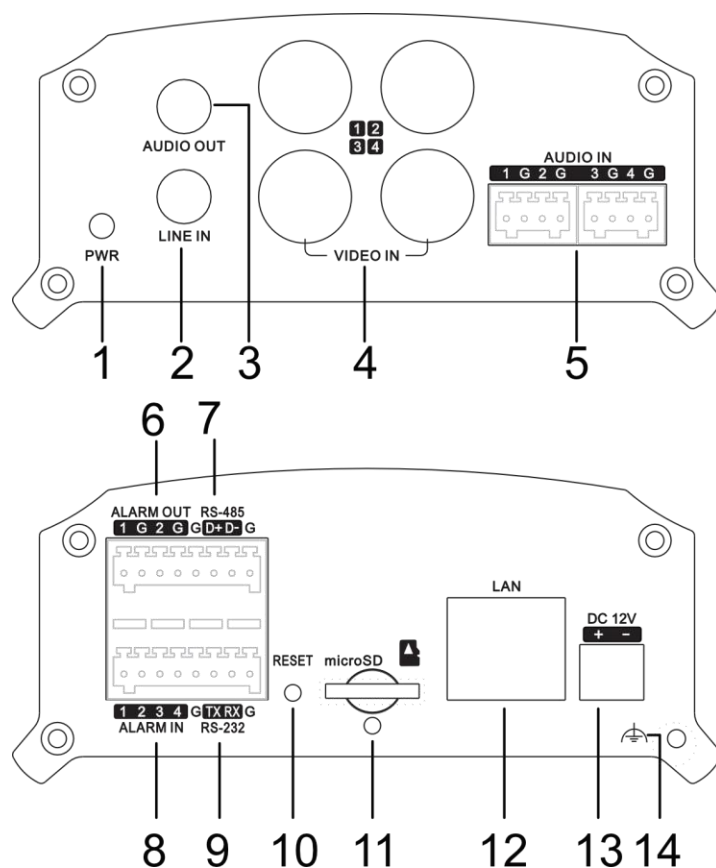


No.	Description	No.	Description
1	Power LED Indicator	8	Alarm In
2	LINE IN	9	RS-232 Serial Interface
3	Audio Out	10	RESET
4	Video In	11	Micro SD Card Slot
5	Audio In	12	LAN Network Interface
6	Alarm Out	13	12V DC Power Supply
7	RS-484 Serial Interface	14	GND

▪ Available Model

DS-6704HUHI(B)

▪ Dimension

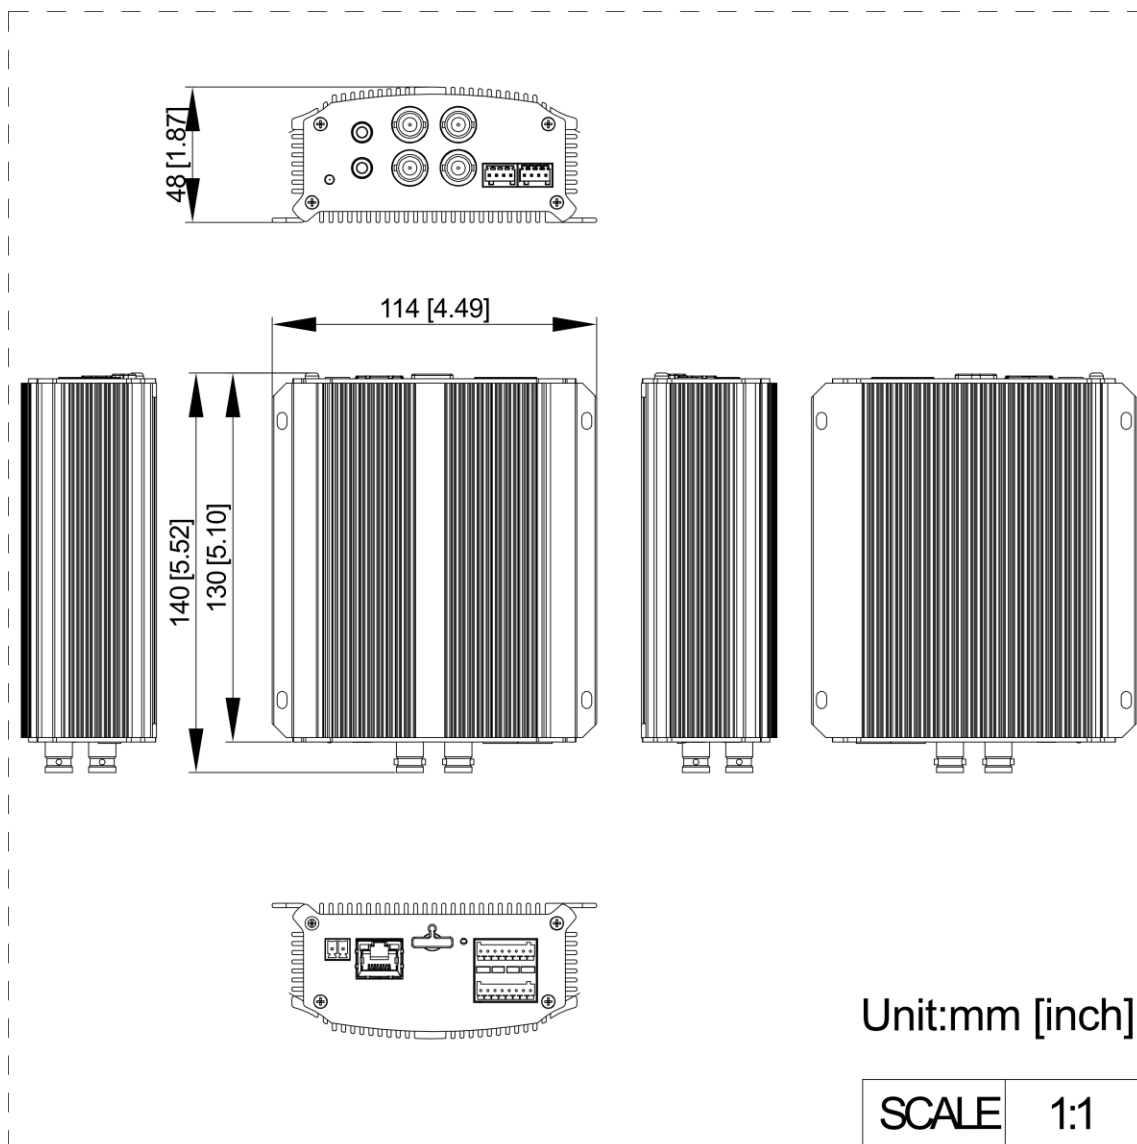

See Far, Go Further



www.hikvision.com
support@hikvision.com

