

WR-AC12LTE
AC1200 4G LTE Wireless Router



- 4G Boost Faster Speed.
- AC1200 Dual-band WiFi.
- Instantly Access a Mobile Network with a SIM Card.

▪ Specification


General	
Product Dimensions (W × H × D)	233.9mm×151.4mm×40.3mm
Package Dimensions (W × H × D)	405mm×307mm×80mm
Net Weight	0.355kg
Gross Weight	0.620kg
Packing List	1200Mbps Wi-Fi5 Router × 1 Power Supply Adaptor × 1 CAT5e Network Cable × 1 Quick Start Guide × 1 Regulatory Compliance and Safety Information × 1
Packing Method	Single pack
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10% to 90% RH non-condensing
Storage Humidity	5% to 95% (no condensation)
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Installation Mode	Desk-Mounted, Wall-Mounted
Wireless Parameter	
Max. Wi-Fi Speed	≤ 1167 Mbps 2.4 GHz: 300 Mbps 5 GHz: 867 Mbps
Wireless Standard	IEEE 802.11a/n/ac @5GHz, IEEE 802.11b/g/n @2.4GHz
Wireless Range	Up to 860-1080 ft ² /80-100 m ² (Recommend coverage for home use, actual Wi-Fi range varies depending on the layout and wall materials)
Working Frequency Band	2.4 GHz , 5 GHz
Max. Connections	64
Recommended Connections	48
Transmitting Power	CE : < 16 dBm(2.4GHz) < 17 dBm(5GHz)
Wireless Features	MU-MIMO Supported
Antenna	2 detachable LTE antennas; 2 Internal Wi-Fi antennas
Antenna Gain	2 detachable LTE Antennas: 2 dBi 2 Internal Wi-Fi Antennas: 3 dBi dBi
Receiving Sensitivity	5 GHz : -89.5 dBm@HE80-MCS0 -64 dBm@HE80-MCS11 2.4GHz : -88 dBm@HT40-MCS0 -70 dBm@HT40-MCS7
Hardware Parameter	
Network Interface	1 WAN/LAN combo port + 1 LAN port (10/100 Mbps auto-negotiation)
LED Indicator	power LED*1、 internet LED*1、 WiFi LED*1、 RJ45 LED*1、 LTE LED*3

Button	WPS/Reset button x1
RAM	64 MB DDR3
ROM	8 MB NOR
Power Supply Method	Power Supply Adapter
Power Specifications	DC 9 V, 1 A
Max. Power Consumption	≤9 W
SIM Card Slot	1xSIM Card
Software Function	
Operating Mode	4G mode,Router Mode
WAN Mode	DHCP Static IP PPPOE
DHCP	DHCP Client List DHCP Server
Parental Control	Internet Access Period,Filter URL,Custom Profiles
Security Mechanism	Hide SSID
IP Version	IPv4 IPv6
Firewall	Forbid TCP SYNC flood attack Forbid ICMP flood attack
NAT Forwarding	Port Mapping DMZ UPnP
DDNS	88ip.cn;no-ip.com;dyn.com;oray.com
VPN	PPTP Server,PPTP Client,L2TP Client,IPsec Client
Security Mode	WPA2-PSK,WPA/WPA2-PSK
Management Method	Web
Upgrade	Web
System Log	System log

▪ Available Model

WR-AC12LTE

▪ Dimension

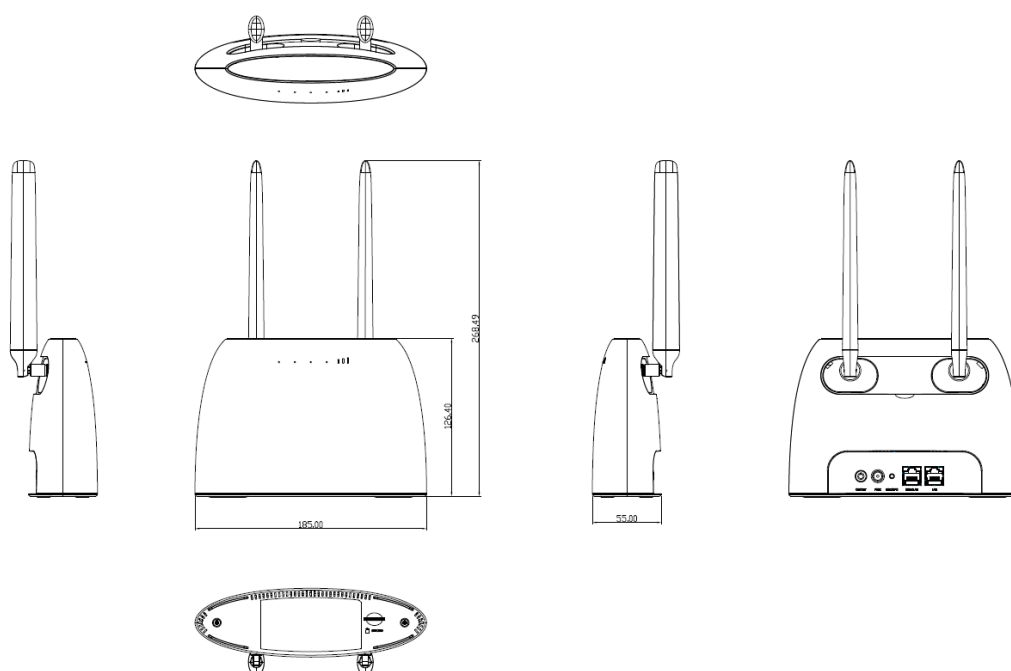

See Far, Go Further



www.hikvision.com
support@hikvision.com

