

DS-3WRU9X-H
AX900 Wi-Fi 6 High Gain USB Adapter



- Upgrade to WiFi 6 For Better Experience
- Auto-install, Plug And Play
- Compatible with Various Operating Systems


▪ Specification

General	
Product Dimension (W × H × D)	48mm*20mm*8mm
Package Dimension (W × H × D)	237mm×100mm×18mm
Net Weight	0.002 kg
Packing List	900Mbps Pro Wireless USB Adapter x 1 Quick Start Guide x 1 Regulatory Compliance and Safety Information x 1
Packing Method	Single pack
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10% to 90% RH non-condensing
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Storage Humidity	30% to 90% RH non-condensing
Max. Power Consumption	≤ 2.46 W
Gross Weight	0.021 kg
Wireless Parameter	
Data Rate	≤ 300 Mbps 2.4 GHz: Up to 286Mbps
Wireless Standard	IEEE802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax
Working Frequency Band	2.4 GHz;5GHz
Transmitting Power	<20dBm (EIRP) <0.1W(EIRP)
Wireless Performance	1*1 MIMO supported
Receiving Sensitivity	2.4GHz<20dBm (EIRP); 5GHz<23dBm (EIRP)
Antenna	Internal Antenna
Hardware Parameter	
Power Supply Method	USB
Software Function	
Application function	Station Mode , Soft AP Mode
Security Mode	WPA-PSK / WPA2-PSK, WPA / WPA2 supported
Supported Operating System	win7/10/11/linux

▪ Available Model

DS-3WRU9X-H

▪ Dimension

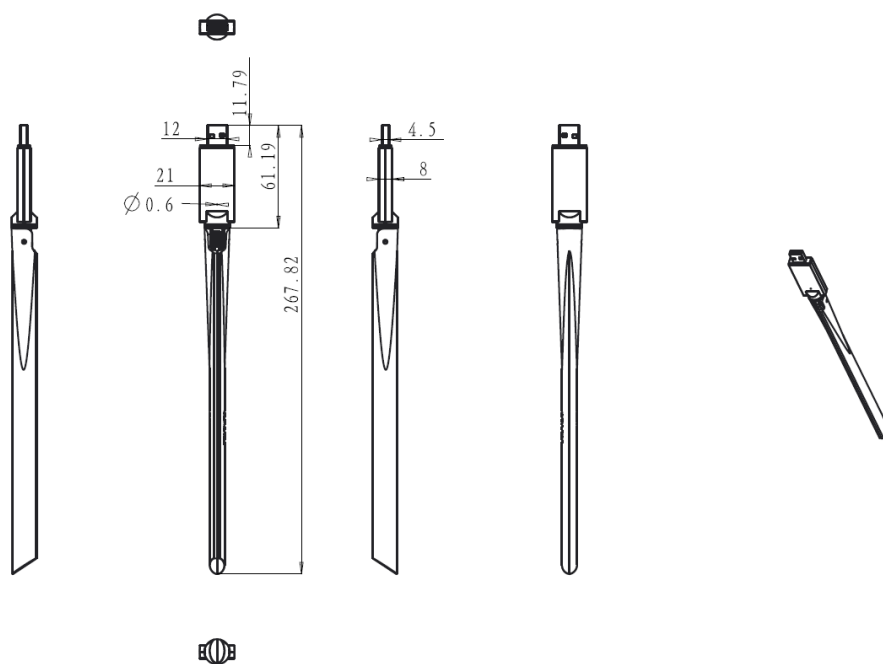

See Far, Go Further



www.hikvision.com
support@hikvision.com

