

## **DS-KHH6020X-H** **Audio Bedhead Terminal with Handle**




- One-button calls (and handset calls) the center station directly with two way audio intercom
- Multi-buttons and handset support different call types (call, dressing change and cancellation)
- Support wired access to the bathroom emergency alarm button
- 4 alarm zones supported
- Power supply: 12VDC, or POE with POE converter

## ▪ Specification

| System parameters          |                                                                          |
|----------------------------|--------------------------------------------------------------------------|
| Operation system           | Linux                                                                    |
| ROM                        | 16 M                                                                     |
| Audio parameters           |                                                                          |
| Audio input                | Built-in omnidirectional microphone, external speaker                    |
| Audio compression standard | G.711U                                                                   |
| Audio output               | Built-in SPK                                                             |
| Audio compression bitrate  | 64 Kps                                                                   |
| Audio quality              | Noise suppression and echo cancellation                                  |
| Network parameters         |                                                                          |
| Network protocol           | TCP/IP, SIP, RTSP                                                        |
| Device interfaces          |                                                                          |
| Alarm input                | 4                                                                        |
| Network interface          | 1*RJ45                                                                   |
| RS-485                     | 1                                                                        |
| TF card                    | Not Support TF card                                                      |
| General                    |                                                                          |
| Installation               | Wall mounting                                                            |
| Working temperature        | -10°C ~ 50°C                                                             |
| Working humidity           | 10% to 95% (no-condensing)                                               |
| Dimension (W × H × D)      | 86mm x 86mm                                                              |
| Application environment    | Indoor                                                                   |
| Power consumption          | ≤ 4 W                                                                    |
| Power Supply Output        | 12 VDC                                                                   |
| Power supply               | 12VDC or POE (IEEE 802.3 at compliant, need to work with POE converntor) |

## ▪ Dimension

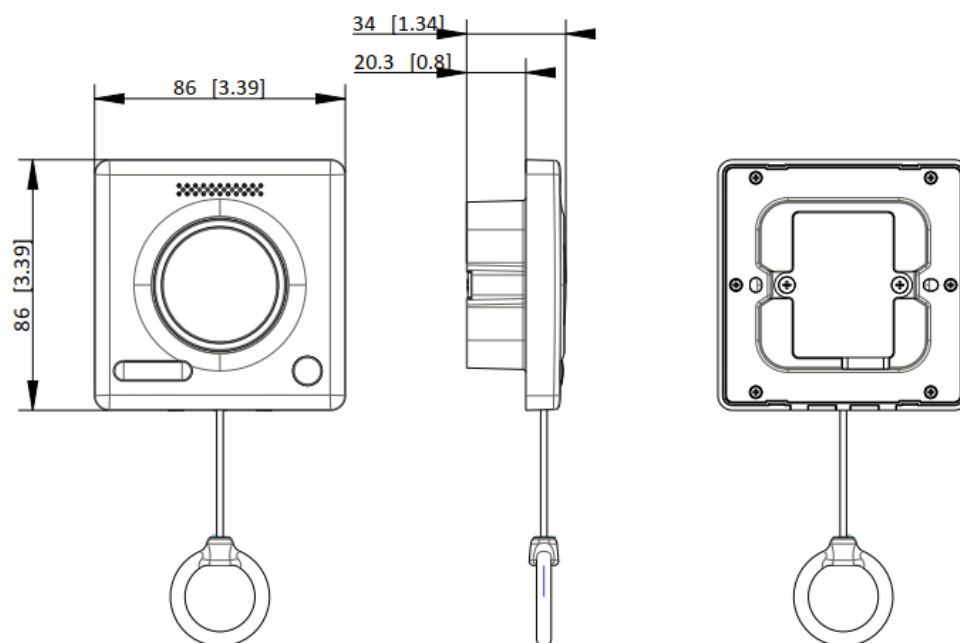

Unit:mm [inch]

|       |     |
|-------|-----|
| SCALE | 1:1 |
|-------|-----|

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

