

DS-KAD-E2/E1 2 wire and IP convert



- support connecting to IP intercom main station
- support adding IPC to Indoor monitor.
- support 2 wire HD system work with lift controller.


▪ Specification

Network parameters	
Wi-Fi	Yes
Device interfaces	
Two-wire interface	1(for connecting two-wire HD system)
Network interface	10/100MB (10/100 Mbps Self-Adaptive Ethernet)
Power indicator	1
Reset	1
DIP switch	2(Reserved, for device mode setting)
Power supply input	12V/DC or POE
Debugging port	1
General	
Installation	wall-mounted or desktop installation
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Dimension (W × H × D)	90 mm × 77 mm × 24 mm (3.54" × 3.03" × 0.94")
Video Audio Distributor	
Indicators	3(for indicating device operation status, Includes WiFi status, power, and operational status)

▪ Available Model

DS-KAD-E2/E1 O-STD

▪ Dimension

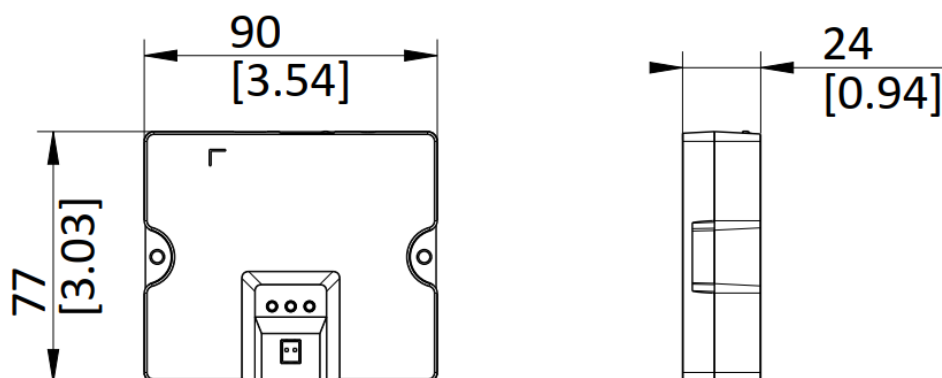

Unit: mm [inch]

SCALE

1:1

See Far, Go Further



www.hikvision.com
support@hikvision.com

