

**DS-QAE0A450G1-V/ENB**  
**450W EVAC Backup Amplifier**




- Backup amplifier used for voice alarm

## ▪ Specification

Audio	
Frequency Response	100 Hz-15 KHz, $\pm 3$ dB
THD and SNR	THD: $\leq 2\%$ (1KHz) SNR: $\geq 65$ dB
Input	6 ways of RJ45 ports used to connect with devices (DSQAE0A150G1-V/EN / DS-QAE0A300G1-V/EN / DS-QAE0A450G1-V/EN) to input audio signal or output status message.
Output	6 ways of 2PIN screw terminal used to connect with devices (DSQAE0A150G1-V/EN / DS-QAE0A300G1-V/EN / DS-QAE0A450G1-V/EN) to output amplifier's signals.
General	
Power	220-240VAC, 50/60Hz, 450 W
Dimension	483x469x89 mm
Weight	10.7 kg
Packing List	Standby Amplifier x1; Power Line x1;
Operating Temperature	-5°C~45 °C
Power Consumption	600 W Max


## ▪ Physical Interface

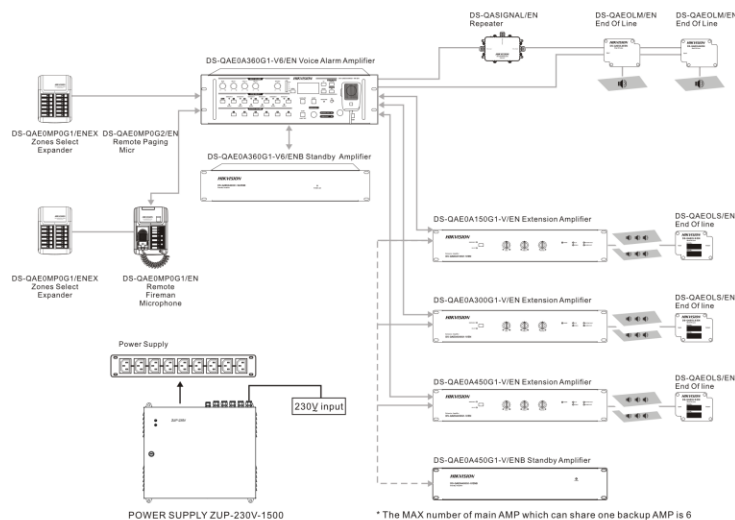

## ▪ Available Model

DS-QAE0A450G1-V/ENB

## ▪ Dimension

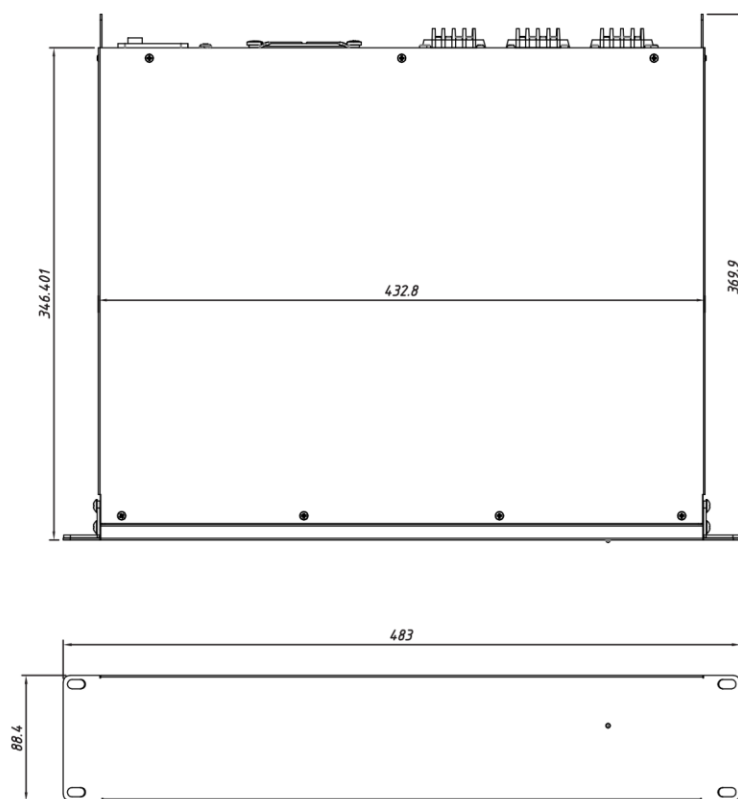

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

