

DS-QAEOLS/EN
Single-Ended Speaker Line Monitoring Module



- Connected to DS-QASIGNAL/EN.
- Capable of detecting speaker line faults with high accuracy.
- Used to detect the single LF or HF speaker line.



▪ Specification

Audio	
Max. Transmission Distance	PowerBus:1000 meters
Protocol	PowerBus protocol
Input	1 group of 2 PIN screw terminal used to connect with device "DS-QASIGNAL/EN" to communicate with the host (detect signals) within communication range 1000 meters. 1 group of 2 PIN screw terminal used to connect with device "DS-QAE0A360G1-V6/EN" to output audio signals from the master amplifier within communication range 1000 meters.
Output	2PIN screw terminal used to connect speaker to output audio signals into speaker within communication range 1000 meters.
General	
Power	24V,Powered by (DS-QASIGNAL/EN) <0.05W
Dimension	75x58x34 mm
Weight	100 g
Packing List	End Of Line x1;
Operating Temperature	-5°C~45 °C

▪ Available Model

DS-QAEOLS/EN

▪ Dimension

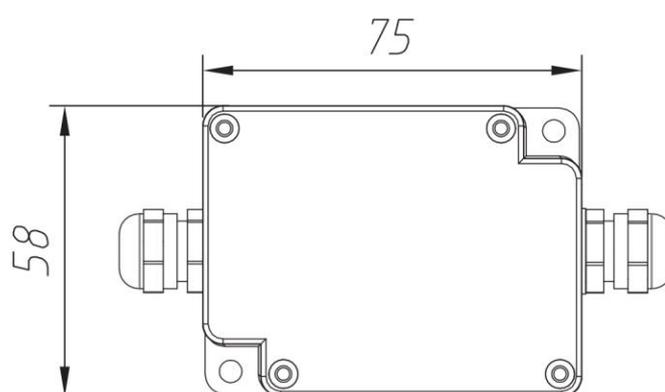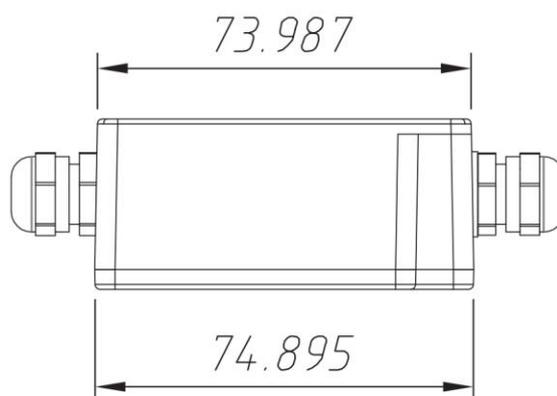

See Far, Go Further



www.hikvision.com
support@hikvision.com

