

DS-QAPSJR40-4
8 × 4" J-shaped Column Speaker




- 400 W rated power
- Driver : 4-inch woofers × 8, 0.75-inch tweeters × 24
- Sensitivity(1 m, 1 W): 102 dB
- Frequency response: 80Hz~20KHz (±10dB) , 100Hz~20KHz (±3dB) ,
- Coverage angle: horizontal dispersion angle:100°, vertical radiation angle: up 7.5° , down 12.5°
- Maximum sound pressure level: 125 dB @1 m

▪ Specification

Speaker	
Impedance	Ω4
Rated Power	400 W
Total Harmonic Distortion (THD)	< 1%
Sensitivity(1 m, 1 W)	102 dB
Max. Acoustic Pressure	125 dB @1m
Frequency Response	±10dB : 60Hz~20KHz
	±3dB : 80Hz~20KHz
Coverage Angle	Horizontal dispersion angle:100° ; vertical radiation angle : up 7.5°,down 12.5°
Interface	
Device Interface	4-Pin phoenix connector (Fixed Resistance Input)
General	
Material	Birch
Dimension	476.1*130*195.5mm
Weight	Approx. 5.6 kg (12.3 lb.)
Operating Condition	-10°C to 50°C (14 °F to 122 °F)
Package Dimension	688 X 245 X 310mm
With Package Weight	Approx. 8.0 kg (17.6 lb.)
Color	Black
Mounting Hole Dimension	180mm
Installation	Wall Mount

▪ Dimension

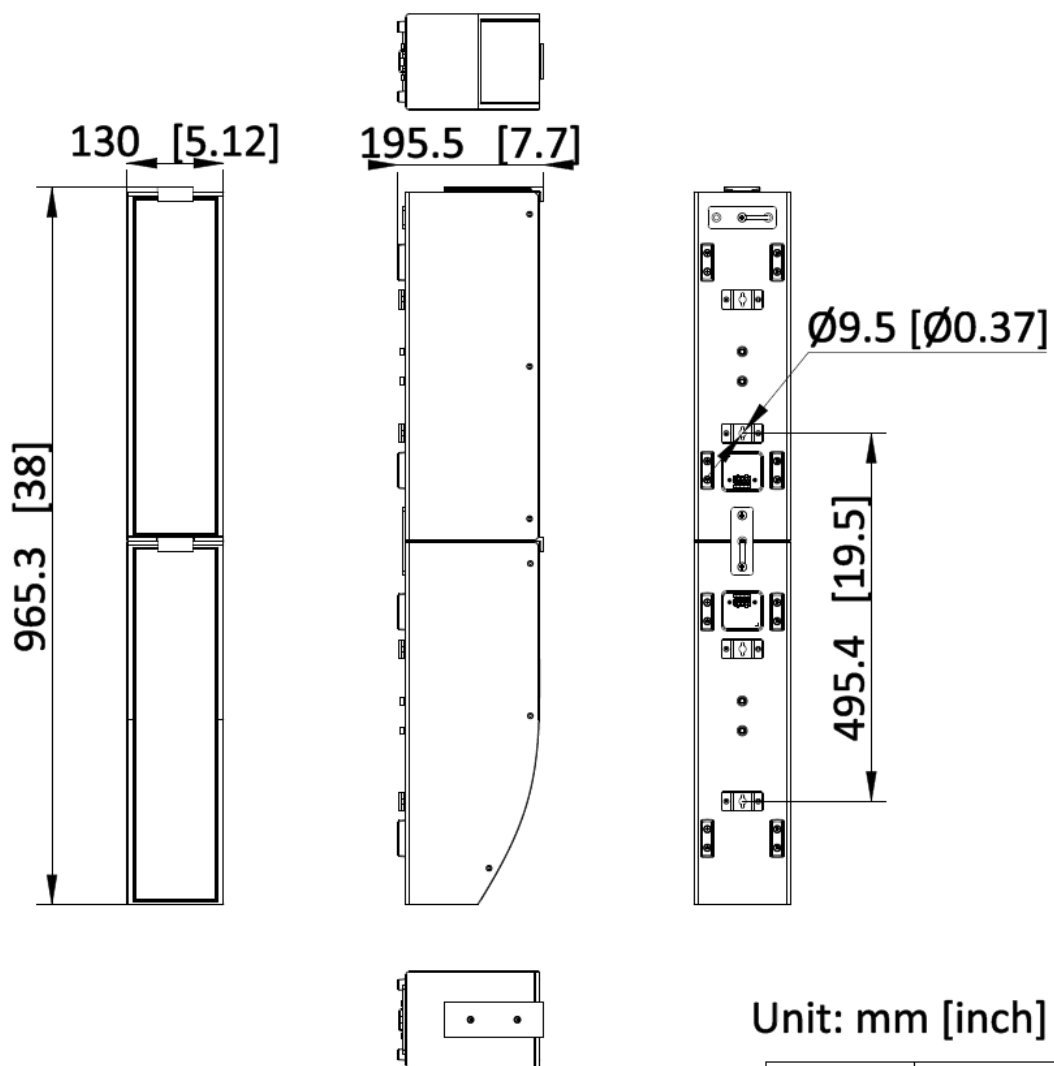

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

