

DS-KEP311X-ZJ Panic Alarm Tower




- Embedded Linux OS with high-performance SOC processor for stable operation
- Network/audio-video self-adaptation for low latency under packet loss
- 5 m-range two-way audio with high-sensitivity mic
- 24/7 monitoring via built-in 4MP HD color camera
- Supports H.264/H.265 video encoding format, G.711U audio compressing standard
- Supports multiple protocols: TCP/IP, SNMP, Hikvision SIP, RTSP
- Supports ISUP protocols for public network transmission
- Supports audio expansion with a 3.5 mm standard audio interface for external active speakers and microphones
- Supports waterproofing, tamper-proofing, vandal resistance functions

▪ Specification

Hardware features	
Electrical locker	Normal cabinet lock
Tamper-Proof	Tamper alarm
Network interface	10M/100M adaptive Ethernet port
Audio interface	1-ch built-in Omnidirectional microphone, pickup distance: 5 m 1-ch 3.5 mm audio interface for external audio input
Bus	RS-485 1, half-duplex
SD card	Standard microSD card slot, supports microSD/SDHC/SDXC card, Max. 256 G
Loudspeaker	1-ch 30 W built-in loudspeaker Sound can be configured separately
Video	
Resolution	2560*1440
Field angle	Horizontal field of view: 128°
Frame rate	PAL: 25fps ; NTSC:20fps
Day/night switch mode	ICR auto-switch
Audio	
Audio input	1-ch built-in omnidirectional microphone, pickup distance: 5 m 1-ch 3.5 mm audio interface for external audio input
Intercom	1-ch built-in omnidirectional microphone, pickup distance: 5 m
Audio output	1-ch 30 W build-in loudspeaker 1-ch 3.5 mm audio interface for external audio output
Audio compression code rate	16Kbps, 64Kbps
Electrical characteristics	
Operation temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Power supply	110 to 220 VAC
Operation humidity	10% to 90%
Power consumption	≤ 70 W
General	
Dimension(WxHxD)	Without bracket: 400 mm × 400 mm × 2200 mm With bracket: 400 mm × 400 mm × 4500 mm
Installation method	Ground mounting
Device management	
Alarm input	2
Camera	4 MP HD IR colorful camera
Alarm output	2
Sounder output	1-ch 30 W Build-in Loudspeaker+ 1-ch 3.5 mm external output
Lamp	1 red and blue alarm lamp, light can be configured separately

▪ Dimension

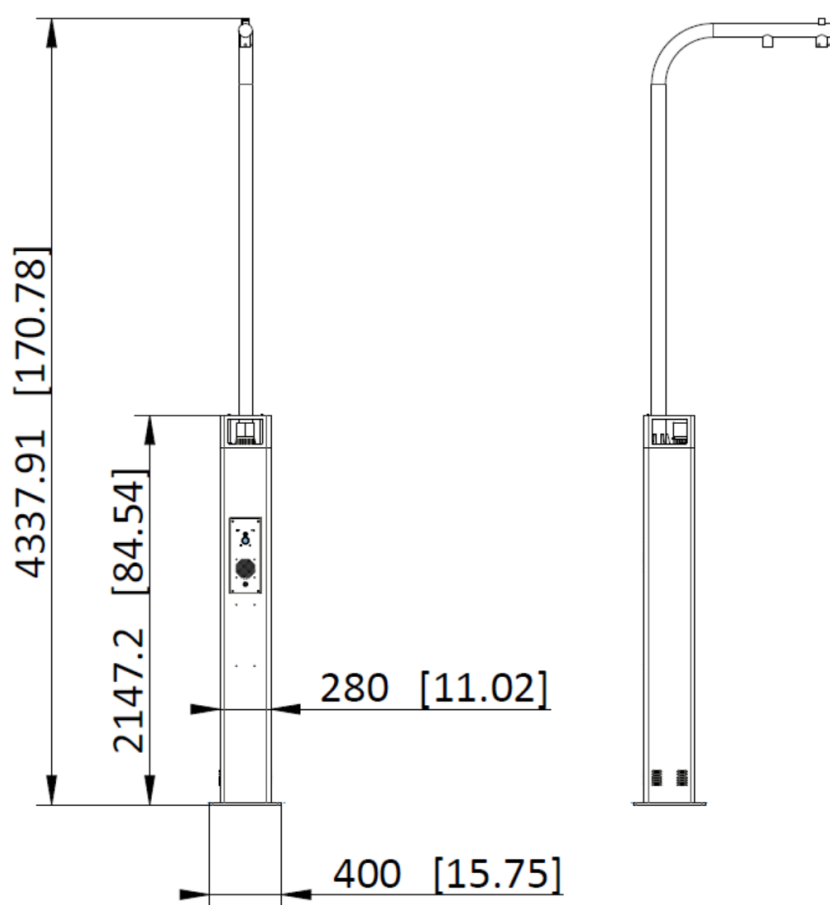

Unit:mm [inch]

SCALE	1:4
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

