


DS-D4619CD-1AC/P
DS-D4619CD-1AC/P

- Feather light and thin: the weight of cabinet 500 × 500mm < 7.1kg, thickness only 69mm
- Creative Splicing: $\pm 10^\circ$ integrated curve lock, 500 × 500mm and 500 × 1000mm cabinets can be spliced vertically
- High image quality: Up to 1000nit brightness for indoor product, 7680Hz high refresh rate, excellent contrast and color performance for an immersive stage experience
- Faster installation & easier maintenance: Modular design with special eject button, all components can be quickly assembled, disassembled and maintained within 5 seconds
- Concise appearance and sturdy cabinet design, focusing on providing one-stop solution for all your LED display needs: conferences, stages, product launches and real estate activities

▪ Specification

Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P1.9
Pixel Pitch	1.9531 mm
Modules Component	2 × 2
Dimensions (W × H × D)	500mm × 500mm × 69mm
Resolution	256 x 256
Area	0.25 m ²
Weight	7.2 kg
Pixel Density	262144 dots/m ²
Lamp Board Housing	With housing
Cabinet Material	Die-casting Aluminium
Maintenance Method	Front & Rear maintenance
Protection Level	IP40
Display	
White Balance Brightness	1000 cd/m ²
Color Temperature	6500K adjustable
Viewing Angle	Horizontal 160°, vertical 140°
Contrast Ratio	≥ 6000:1
Color Uniformity	≤ ± 0.003Cx , Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Driving Method	1/16
Frame Frequency	50/60 Hz
Refresh Rate	7680 Hz
Grey Level	16 bit
Key Material	
Lamp Encapsulation	IMD 2 in 1
Control System	Hikvision
Power	
Power Supply	110~220 VAC ± 15%
Max. Consumption	≤610 W/m ² (1000nits)
Average Consumption	≤180 W/m ² (800nits)
Working Environment	
Working Temperature	-20 °C to +45 °C (-4 °F to +113 °F)
Working Humidity	10%~90%RH (No condensation)
Storage Humidity	10%~90%RH (No condensation)
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
General	
Gross Weight	109 kg /10 in 1
Package Dimension (W × H × D)	1092 (W) mm × 610 (H) mm × 580 (D) mm


▪ Dimension

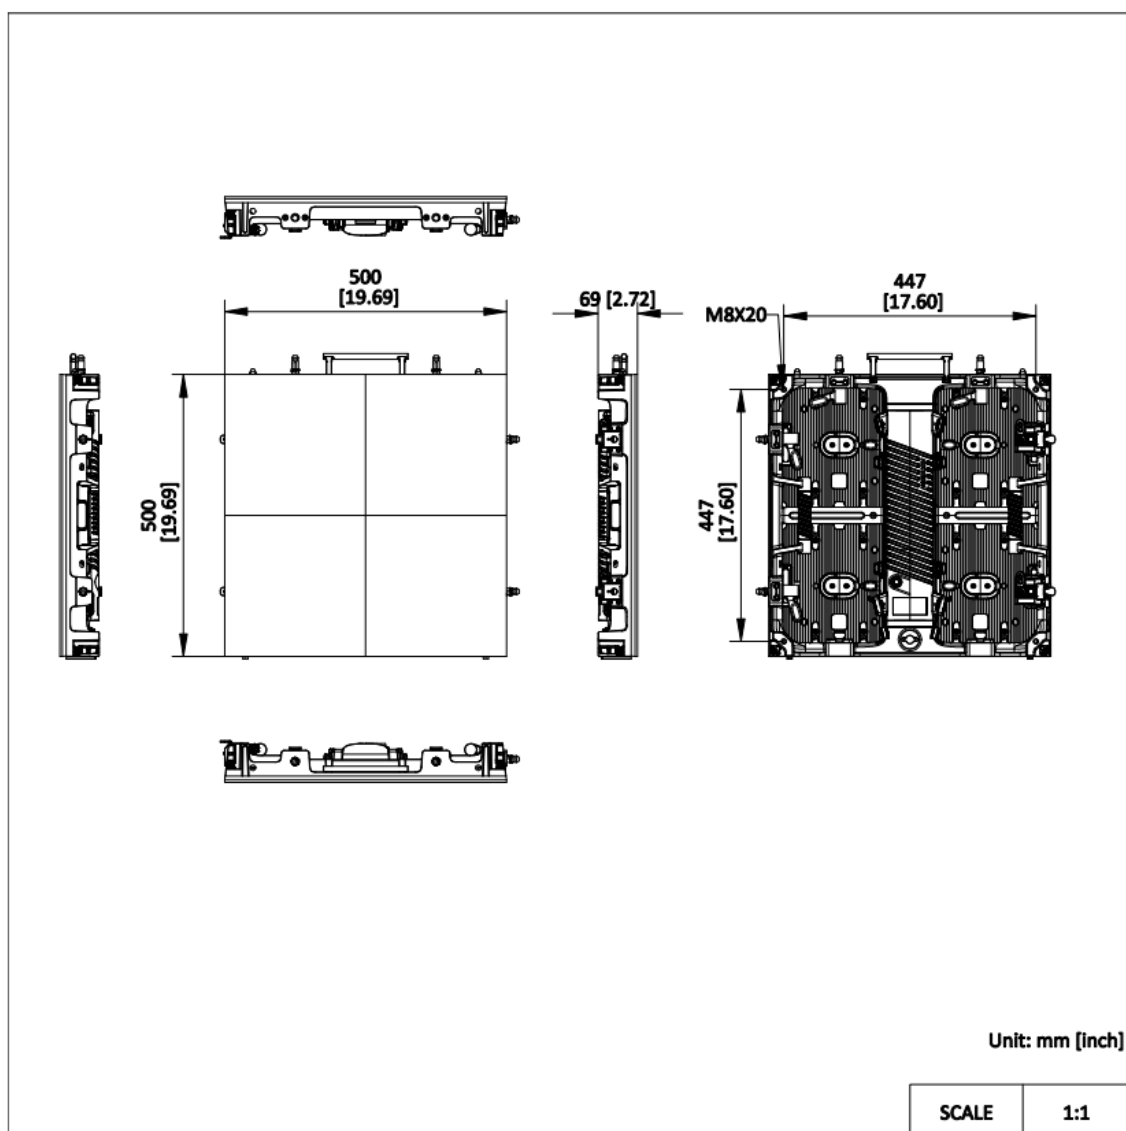

▪ Accessory

▪ Optional

DS-DPRSS-1N/HB0 5/FC	DS-DPRSS-1N/HBB S05/FC	DS-DPRSS-1N/HB0 5/CB	DS-DPRSS-1N/HBB S05/CB	DS-D4619CD-1A/P/ M
				
DS-D4619CD-1A/P/ A1	DS-D4619CD-1A/P/ A2			

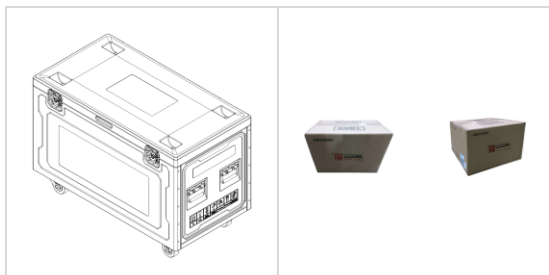

See Far, Go Further



www.hikvision.com
support@hikvision.com

