

DS-D4739CD-1AC/P
DS-D4739CD-1AC/P

- High precision aluminum alloy cabinet, ultra-thin and lightweight, 500mm cabinet weight < 7.5kg, thickness only 69mm
- $\pm 10^\circ$ integrated curve lock, 500mm and 1000mm cabinets can be assembled
- Up to 4500nit brightness, 7680Hz refresh rate, excellent contrast and color performance bring an immersive stage experience
- Fully modular design, innovative module pop-up button, all components can be quickly assembled, disassembled, and maintained within 5 seconds
- Simple and stable appearance, efficient disassembly and assembly experience, sturdy and stable box design, focusing on providing overall LED display solutions for events such as conferences, stages, product launches, and real estate


▪ Specification

| Display | |
|-------------------------------|---------------------------------------|
| White Balance Brightness | 4500 cd/m ² |
| Color Temperature | 6500K adjustable |
| Viewing Angle | Horizontal 160°, vertical 140° |
| Contrast Ratio | ≥ 6000:1 |
| Color Uniformity | ≤ ± 0.004Cx , Cy |
| Brightness Uniformity | ≥ 97% |
| Cabinet | |
| Pixel Configuration | SMD Triad LED |
| Pixel Pitch Category | P3.9 |
| Pixel Pitch | 3.9063 mm |
| Modules Component | 2 × 2 |
| Dimensions (W × H × D) | 500mm × 500mm × 69mm |
| Resolution | 128x128 |
| Area | 0.25 m ² |
| Weight | 7.5 kg |
| Pixel Density | 65536 dots/m ² |
| Lamp Board Housing | With housing |
| Cabinet Material | Die-casting Aluminium |
| Maintenance Method | Rear maintenance |
| Protection Level | IP65 |
| Processing Performance | |
| Driving Method | 1/8 |
| Frame Frequency | 50/60 Hz |
| Refresh Rate | 7680 Hz |
| Grey Level | 16bit |
| Key Material | |
| Lamp Encapsulation | Black SMD1921 |
| Control System | Hikvision |
| Power | |
| Power Supply | 110~220 VAC ± 15% |
| Max. Consumption | ≤750 W/m ² (4500nits) |
| Average Consumption | ≤250 W/m ² |
| Working Environment | |
| Working Temperature | -20 °C to +45 °C (-4 °F to +113 °F) |
| Working Humidity | 10%~90%RH (No condensation) |
| Storage Humidity | 10%~90%RH (No condensation) |
| Storage Temperature | -40 °C to +60 °C (-40 °F to +140 °F) |
| General | |
| Gross Weight | 112 kg /10 in 1 |
| Package Dimension (W × H × D) | 1092 (W) mm × 610 (H) mm × 580 (D) mm |

▪ Available Model

DS-D4739CD-1AC/P
DS-D4739CD-1AC/P/NOVA

▪ Dimension

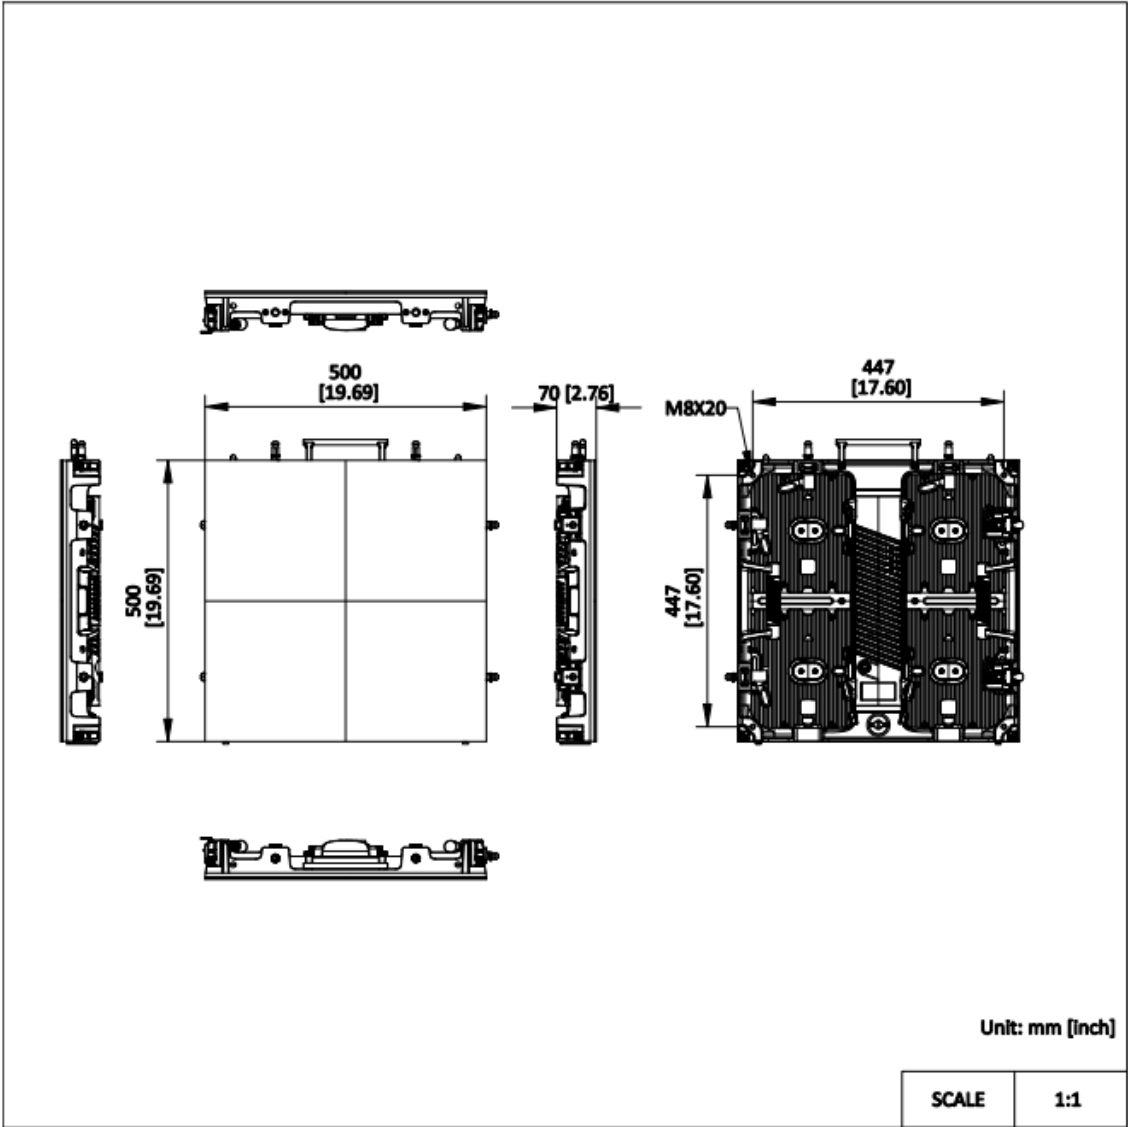

▪ Accessory

▪ Optional

| DS-D47XXCD-1A/P/ | DS-D47XXCD-1A/P/ | DS-D4739CD-1A/P/ |
|------------------|------------------|------------------|
| A1 | A2 | M |
| | | |

See Far, Go Further



www.hikvision.com
support@hikvision.com

