

DS-D4739CE22-1AB/P
DS-D4739CE22-1AB/P




- Cube version for Aries & Aries Pro series' full range of 500*500mm products
- Delivered with curve lock system as standard, with cube lock system in the accessory box
- Can be connected with the general panels
- Both curve and cube lock systems are quick-release compatible

▪ Specification

Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P3.9
Pixel Pitch	3.9063 mm
Modules Component	2 × 2
Dimensions (W × H × D)	500 (W) mm × 500 (H) mm × 69 (D) mm (19.69" × 19.69" × 2.72")
Resolution	128 × 128
Area	0.25 m ²
Weight	7.8 kg (17.20 lb.)
Pixel Density	65536 dots/m ²
Lamp Board Housing	With housing
Cabinet Material	Die-casting Aluminium
Maintenance Method	Rear maintenance
Protection Level	IP65
Display	
White Balance Brightness	4500 cd/m ²
Color Temperature	6500K adjustable
Viewing Angle	Horizontal 160°, vertical 140°
Contrast Ratio	≥ 6000:1
Color Uniformity	≤ ± 0.004Cx , Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Driving Method	1/8
Frame Frequency	50/60 Hz
Refresh Rate	7680 Hz
Grey Level	16 bit
Key Material	
Lamp Encapsulation	Black SMD1921
Control System	Hikvision
Power	
Power Supply	AC: 110 to 220 V ± 15%
Max. Consumption	≤ 750 W/m ² (4500nits)
Average Consumption	≤ 250 W/m ²
Working Environment	
Working Temperature	-20 °C to 45 °C (-4 °F to 113 °F)
Working Humidity	10% RH to 90% RH (No condensation)
Storage Humidity	10% RH to 90% RH (No condensation)
Storage Temperature	-40 °C to 60 °C (-40 °F to 140 °F)
General	
Gross Weight	115 kg/10 in 1 (253.53 lb.)
Package Dimension (W × H × D)	1092 (W) mm × 610 (H) mm × 580 (D) mm (42.99" × 24.02" × 22.83")

▪ Dimension

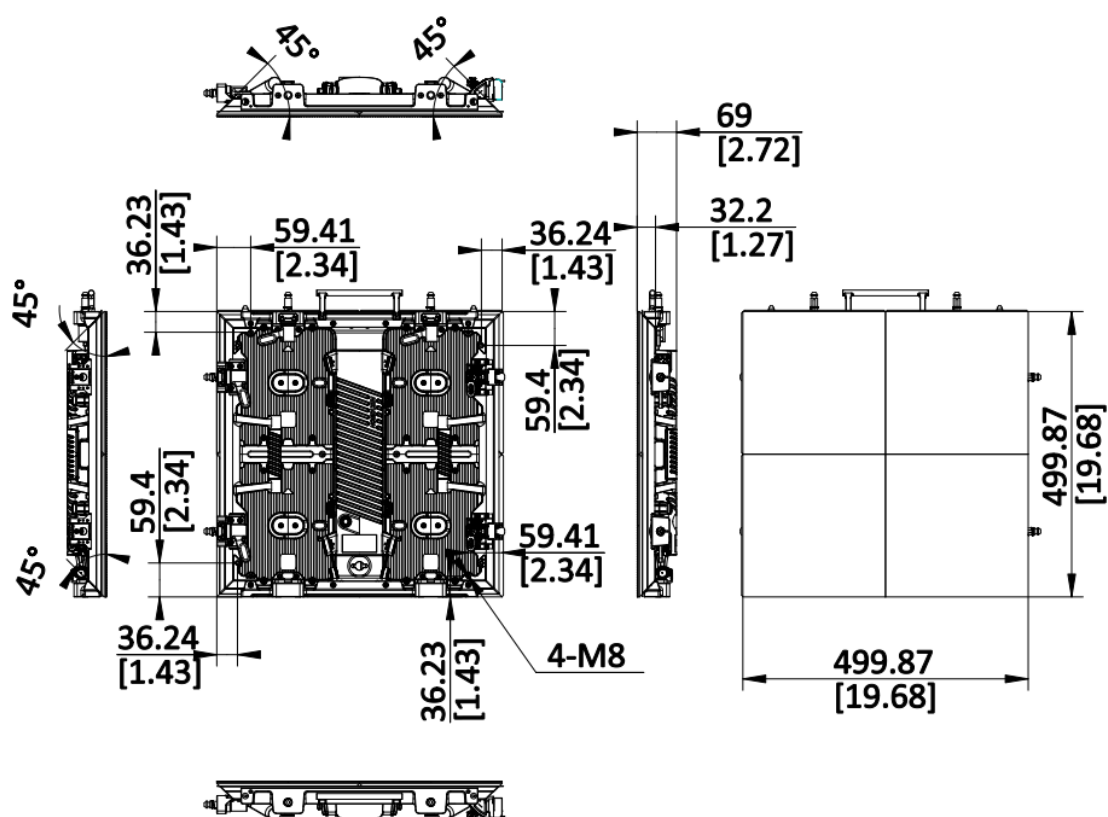

Unit: mm [inch]

SCALE 1:2

▪ Accessory

▪ Optional

DS-D4739CE-1AB/P	DS-D47XXCD-1A/P/	DS-DPRSS-1B/HBB	DS-D47XXCD-1A/P/	DS-DPRSS-1B/HBB
/M	A1	S05/CB	A2	S05/FC

See Far, Go Further



www.hikvision.com
support@hikvision.com

