

DS-QAPS6R6-6 **6.5" Frameless Ceiling Speaker 60W**



- 1 × 1.2-inch tweeter and 1 × 6.5-inch woofer
- 60 W Rated Power
- 91.5 dB Nominal Sensitivity
- 109 dB@1 m Rated Maximum SPL
- 85 Hz to 20 kHz (-10 dB) Bandwidth
- White or Black

▪ Specification




Speaker	
Impedance	8 Ω
Rated Power	60 W
Effective Bandwidth (-10 dB)	85 Hz to 20 kHz
Total Harmonic Distortion (THD)	<1%
Sensitivity(1 m, 1 W)	91.5 dB
Maximum Sound Pressure Level	109 dB
Speaker Unit	1 $\times$ 1.2-inch tweeter and 1 $\times$ 6.5-inch woofer
General	
Power	Impedance : 8 Ω /60WConstant voltage : 100V/70V
Material	Main body: SPCC Base: ABS+PC
Dimension	$\varnothing$ 327.49 $\times$ 179.69 mm (12.89" $\times$ 7.07")
Package Dimension	425 $\times$ mm $\times$ 425 mm $\times$ 310 mm (16.78" $\times$ 16.78" $\times$ 12.2")
Weight	3.9 kg (8.6 lb.)
With Package Weight	6.4 kg (14.11 lb.)
Color	White / black
Operating Temperature	-10 $^{\circ}$ C to 45 $^{\circ}$ C (14 $^{\circ}$ F to 122 $^{\circ}$ F)
Installation	Ceiling Mounting

▪ Available Model

DS-QAPS6R6-6/WHITE

DS-QAPS6R6-6/BLACK

▪ Dimension

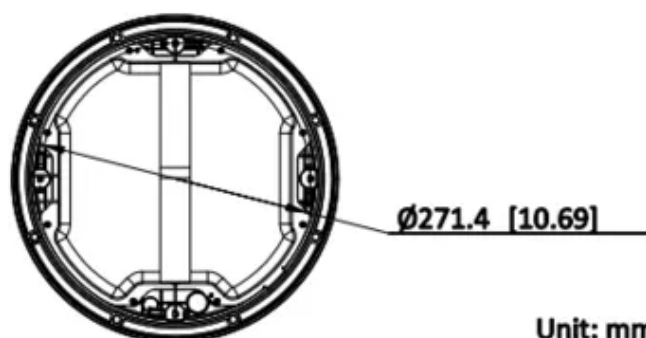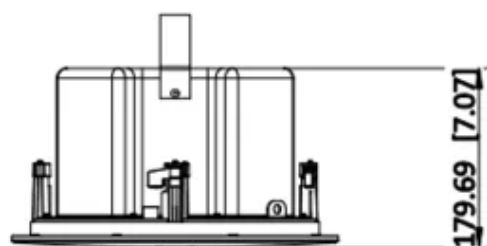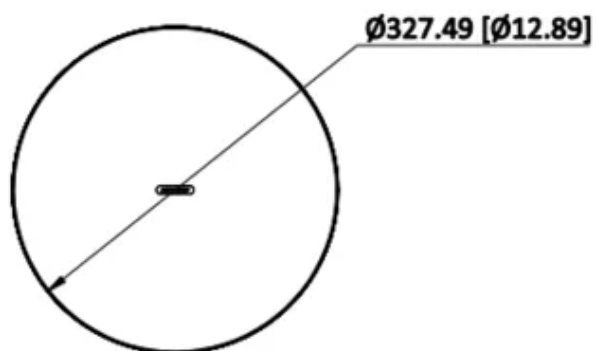

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

