

Face recognition terminal is a kind of access control device. It can be widely applied in multiple scenarios, such as enterprises, stations, dwellings, factories, schools, campus and so on.

- 7-inch LCD touch screen, 2 Mega pixel wide-angle lens
- Recognition distance: 0.3 to 3 m
- Face recognition duration  $\leq$  0.2 s/User
- Face recognition accuracy rate  $\geq$  99%
- Built-in M1 card, Felica card, and DESfire card reading module (Presents card on the screen to authenticate)
- Face mask detection
- 10,000 face capacity, 10,000 fingerprint capacity (With fingerprint module), 50,000 card capacity, and 150,000 event capacity
- Supports ISAPI, ISUP 5.0, TCP/IP (IPv4 and IPv6), 3G/4G
- Supports single person and multiple people (Up to 5 people) recognition
- Supports Push SDK.
- Supports attendance-only function.
- Supports the following SIP servers: ASTERISK, 3CX, ELASTIX, miniSipServer, Brekeke, OpenSIPs, Kamailio.
- Supports face duplicate check, preventing multiple people from using the same face.
- Supports customized Wiegand parameters.

## ■ Specification


System	
Operation system	Linux
Display	
Resolution	600 × 1024
Size	7-inch
Type	Touch screen
Video	
Pixel	2 MP
Lens	Dual-lens
Video standard	PAL (Default)/NTSC
Network	
4G	Support
Interface	
Alarm input	2
Alarm output	1
USB	1 (For Module)
Audio Output Interface	1 (3.5 mm)
PoE	Support, IEEE802.3at
Network interface	1
RS-485	1 RS-485. Supports OSDP protocol version V2.1.7, Baud 9600, 19200, 38400
Wiegand	1
Lock output	1
Exit button	1
Door contact input	1
TAMPER	1
Capacity	
Fingerprint capacity	10,000 (With fingerprint module)
Card capacity	50,000
Face capacity	10,000
Event capacity	150,000
Authentication	
Face recognition accuracy rate	≥ 99%
Card type	M1 card, DESfire card, Felica card
Frequency Band	LTE FDD: B1/2/3/4/5/7/8/12/17/28/66 LTE TDD: B38/40 WCDMA: B1/2/3/4/5/8
Card reading distance	0 to 3 cm
Card reading duration	≤ 1 s
Face recognition duration	≤ 0.2 s per person
Face recognition distance	0.3 to 3 m
General	
Power supply	12 VDC to 24 VDC/2 A
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	0 to 90% (no condensing)
Protective level	IP65
Dimensions	110.5 mm × 209.2 mm × 24 mm (4.35" × 8.24" × 0.94")
Weight	Gross Weight: 1.06 kg (2.34 lb) Net Weight: 0.57 kg (1.26 lb)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Brazilian Portuguese, Japanese, Korean, Chinese Traditional, French, Turkish, Kazakh and Uzbek.
Power Output	DC 12 V, 0.5 A
Function	
Two-way audio	Support

Time synchronization	Support
Face anti-spoofing	Support
Live view	Support
Audio prompt	Support

## ■ Available Model

DS-K1T673DG1X-E1

### ■ Dimension

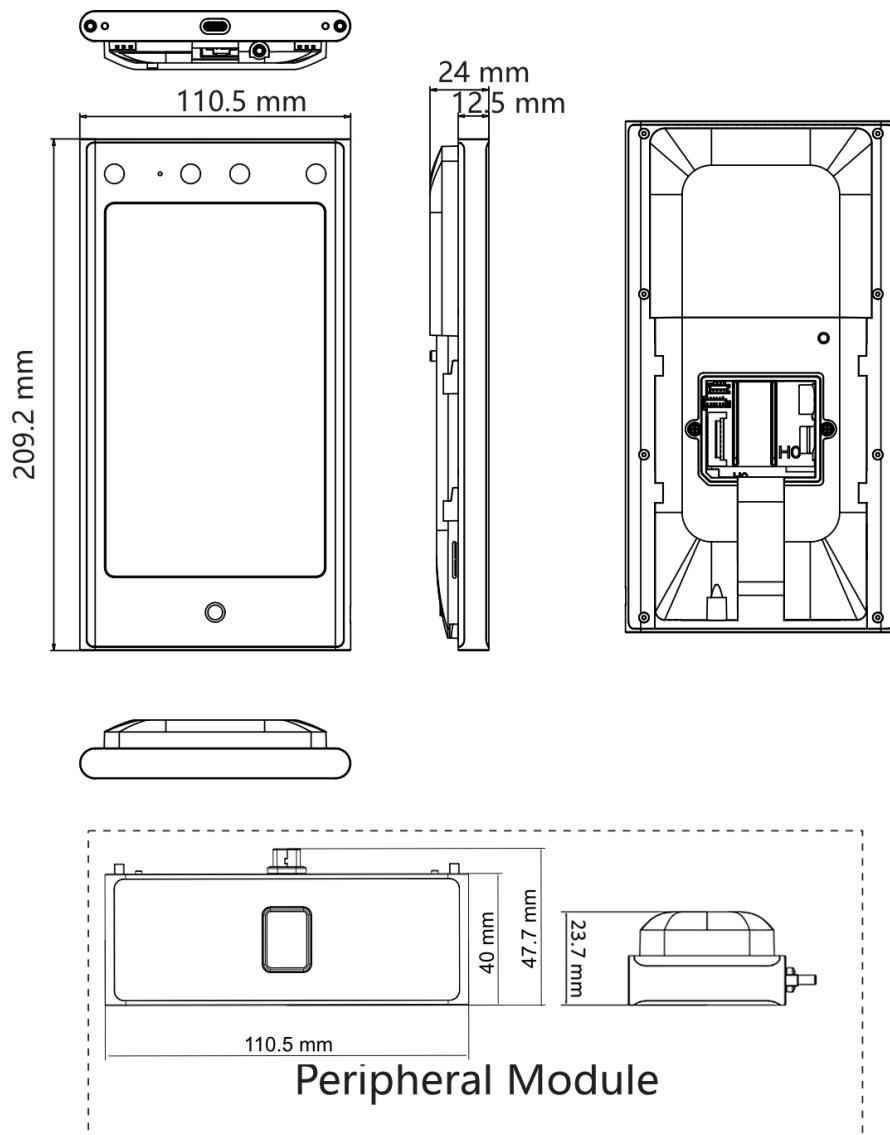

## ■ Accessory

### ■ Optional

**DS-KAB673-S1**

**DS-KAB6-ZU2**

**DS-KAB6-ZU3**

**DS-KAB673-EDB**

**DS-KAB6-ZU1**

**DS-KAB673-B****DS-KAB673-FBQR****DS-KAB673-FB****DS-KAB673-BQR****DS-KAB673-P****DS-KAB6-W1****DS-KAB6-D1****DS-KAB673-A**

